

2N3439
2N3440

SILICON
NPN TRANSISTOR



TO-39 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N3439 and 2N3440 are silicon NPN transistors designed for consumer and industrial line-operated applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

| | |
|--|--|
| Collector-Base Voltage | |
| Collector-Emitter Voltage | |
| Emitter-Base Voltage | |
| Continuous Collector Current | |
| Continuous Base Current | |
| Power Dissipation | |
| Operating and Storage Junction Temperature | |

| SYMBOL | 2N3439 | 2N3440 | UNITS |
|----------------|--------|-------------|------------------|
| V_{CB0} | 450 | 300 | V |
| V_{CEO} | 350 | 250 | V |
| V_{EBO} | | 7.0 | V |
| I_C | | 1.0 | A |
| I_B | | 0.5 | A |
| P_D | | 1.0 | W |
| T_J, T_{stg} | | -65 to +200 | $^\circ\text{C}$ |

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

| SYMBOL | TEST CONDITIONS | MIN | MAX | UNITS |
|---------------|---|-----|-----|---------------|
| I_{CBO} | $V_{CB}=360\text{V}$ (2N3439) | | 20 | μA |
| I_{CBO} | $V_{CB}=250\text{V}$ (2N3440) | | 20 | μA |
| I_{CEX} | $V_{CE}=450\text{V}, V_{BE}=1.5\text{V}$ (2N3439) | | 500 | μA |
| I_{CEX} | $V_{CE}=300\text{V}, V_{BE}=1.5\text{V}$ (2N3440) | | 500 | μA |
| I_{CEO} | $V_{CE}=300\text{V}$ (2N3439) | | 20 | μA |
| I_{CEO} | $V_{CE}=200\text{V}$ (2N3440) | | 50 | μA |
| I_{EBO} | $V_{EB}=6.0\text{V}$ | | 20 | μA |
| BV_{CEO} | $I_C=50\text{mA}$ (2N3439) | 350 | | V |
| BV_{CEO} | $I_C=50\text{mA}$ (2N3440) | 250 | | V |
| $V_{CE(SAT)}$ | $I_C=50\text{mA}, I_B=4.0\text{mA}$ | | 0.5 | V |
| $V_{BE(SAT)}$ | $I_C=50\text{mA}, I_B=4.0\text{mA}$ | | 1.3 | V |
| h_{FE} | $V_{CE}=10\text{V}, I_C=2.0\text{mA}$ (2N3439) | 30 | | |
| h_{FE} | $V_{CE}=10\text{V}, I_C=20\text{mA}$ | 40 | 160 | |
| f_T | $V_{CE}=10\text{V}, I_C=10\text{mA}, f=5.0\text{MHz}$ | 15 | | MHz |
| C_{ob} | $V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$ | | 10 | pF |
| C_{ib} | $V_{EB}=5.0\text{V}, I_C=0, f=1.0\text{MHz}$ | | 75 | pF |


R2 (25-November 2019)

2N3439
2N3440

SILICON
NPN TRANSISTOR



TO-39 CASE - MECHANICAL OUTLINE

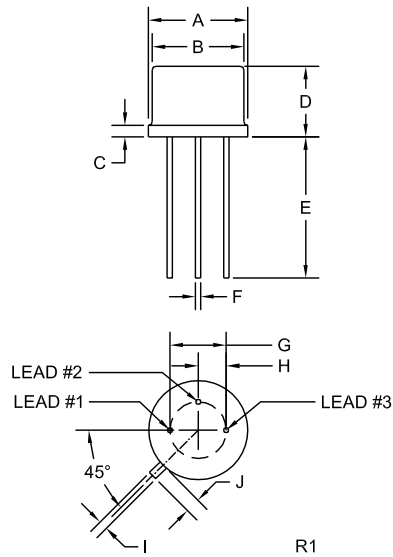

| SYMBOL | DIMENSIONS | | | |
|---------|------------|-------|-------------|------|
| | INCHES | | MILLIMETERS | |
| | MIN | MAX | MIN | MAX |
| A (DIA) | 0.335 | 0.370 | 8.51 | 9.40 |
| B (DIA) | 0.315 | 0.335 | 8.00 | 8.51 |
| C | - | 0.040 | - | 1.02 |
| D | 0.240 | 0.260 | 6.10 | 6.60 |
| E | 0.500 | - | 12.70 | - |
| F (DIA) | 0.016 | 0.021 | 0.41 | 0.53 |
| G (DIA) | 0.200 | | 5.08 | |
| H | 0.100 | | 2.54 | |
| I | 0.028 | 0.034 | 0.71 | 0.86 |
| J | 0.029 | 0.045 | 0.74 | 1.14 |

TO-39 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING: FULL PART NUMBER

R2 (25-November 2019)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms