




**Part Number :** [1600133741](#)

**Product Description :** stAK50h 2 Bay Infotainment Hybrid Header, 56 Circuits, Bay A: 28 Circuit/Key 4; Bay B: 28 Circuit/Key 1; 2.50mm PC Tail Length, UL 94 HB, Gray, Transparent Tray

**Series Number :** 160013

**Status :** Active

**Product Category :** PCB Headers and Receptacles

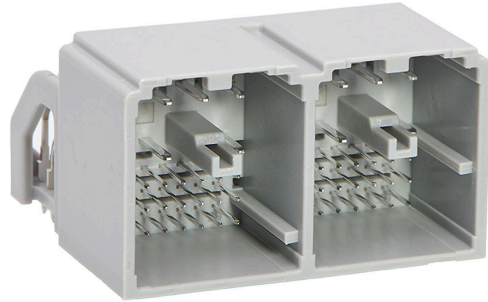

---

## Documents & Resources

### Drawings

[1600133741\\_sd.pdf](#)

[1600139001-000.pdf](#)

### 3D Models and Design Files

[1600133741\\_stp.zip](#)

### Specifications

[AS-160013-001-001.pdf](#)


[PS-160013-001-001.pdf](#)

[TS-160013-2291-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	160013
Description	stAK50h 2 Bay Infotainment Hybrid Header, 56 Circuits, Bay A: 28 Circuit/Key 4; Bay B: 28 Circuit/Key 1; 2.50mm PC Tail Length, UL 94 HB, Gray, Transparent Tray
Application	Automotive, Power, Signal, Wire-to-Board
Component Type	PCB Header
Product Name	stAK50h
UPC	193264121182

#### Electrical

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	14V DC

#### Physical

Breakaway	No
Circuits (Loaded)	56
Circuits (maximum)	56
Color - Resin	Gray
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes

Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	SPS
Net Weight	13.012/g
Number of Rows	5
Orientation	Right Angle
Packaging Type	Tray
PC Tail Length	2.50mm
PCB Locator	Yes
PCB Retention	Yes
Pitch - Mating Interface	2.00mm, 4.00mm
Pitch - Termination Interface	2.00mm, 4.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Temperature Range - Operating	-40° to +85°C
Termination Interface Style	Through Hole

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
stAK50h Hybrid Receptacle, 28 Circuits, Key 4, Black, Bag	<u>1600140014</u>
stAK50h Hybrid Receptacle, 28 Circuits, Key 1, Dark Gray, Bag	<u>1600140011</u>