




Alcoswitch SE

TE Internal #: 3-215876-2

RJ14 Connectors, Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Alcoswitch SE

[View on TE.com >](#)

Connectors > Modular Jacks & Plugs > RJ14 Connectors

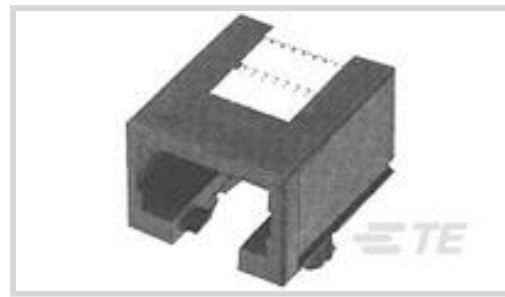

Port Configuration: **Single Port**

Port Matrix Configuration: **1 x 1**

Connector Profile: **Low**

Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: **Standard**

Features

Product Type Features

Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack

Configuration Features

Number of Positions	6
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
PCB Mount Orientation	Right Angle
Number of Loaded Positions	4

Body Features

Connector Profile	Low
Modular Jack Latch Orientation	Standard - Latch Down

Contact Features

Contact Underplating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel
PCB Contact Termination Area Plating Material	Tin



Contact Current Rating (Max)	1.5 A
------------------------------	-------

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

Termination Post & Tail Length	3.2 mm[.126 in]
--------------------------------	-----------------

Mechanical Attachment

Panel Mount Feature	With
---------------------	------

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Centerline (Pitch)	1.02 mm[.04 in]
--------------------	-----------------

Mating Entry Location	Side
-----------------------	------

Housing Color	Black
---------------	-------

Housing Material	PBT GF
------------------	--------

Dimensions

PCB Thickness (Recommended)	1.6 mm[.062 in]
-----------------------------	-----------------

Connector Height	11.5 mm[.453 in]
------------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Shielded	No
----------	----

Industry Standards

Performance Category	Cat 3
----------------------	-------

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Box & Tray, Tray
------------------	------------------

Packaging Quantity	240
--------------------	-----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------




China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

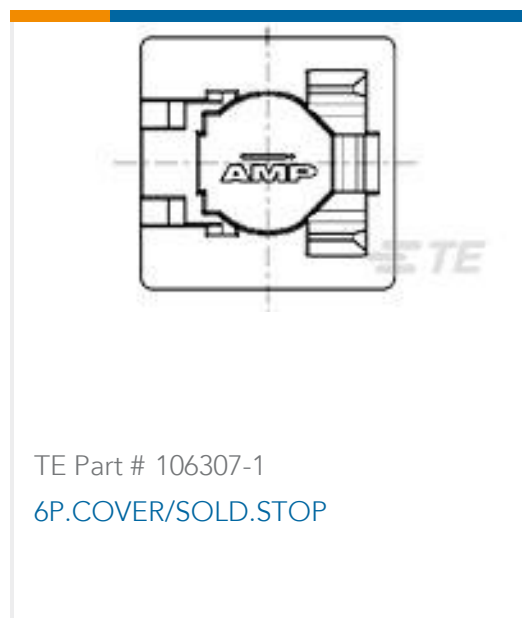

Also in the Series | Alcoswitch SE

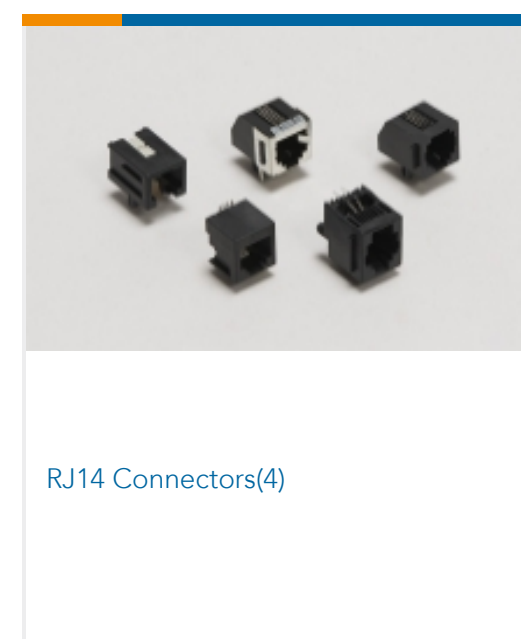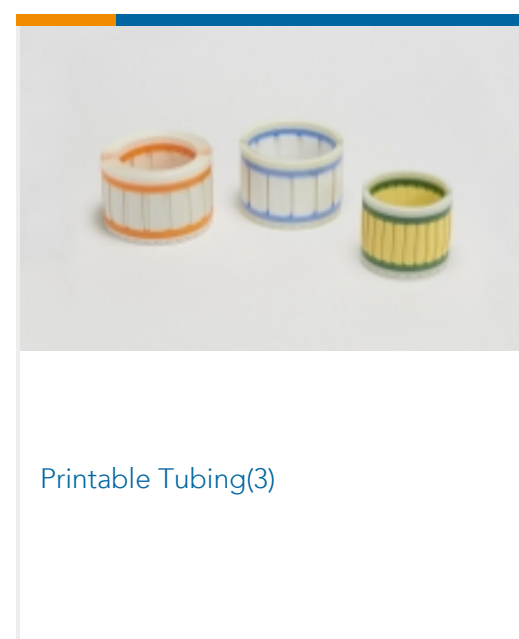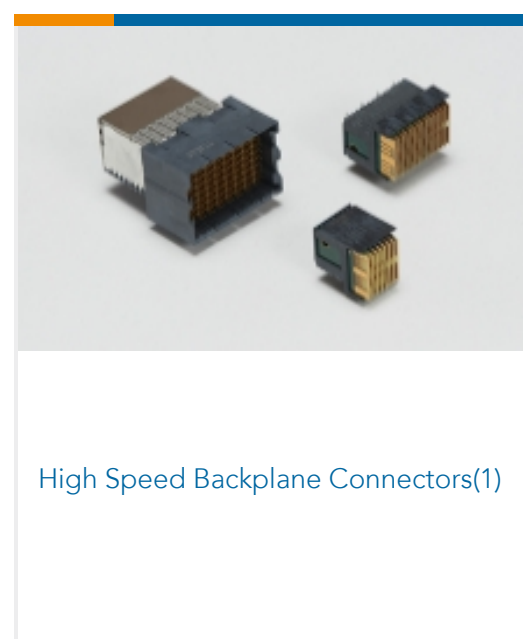




RJ22 Connectors(2)



RJ25 Connectors(5)




RJ45 Connectors(9)

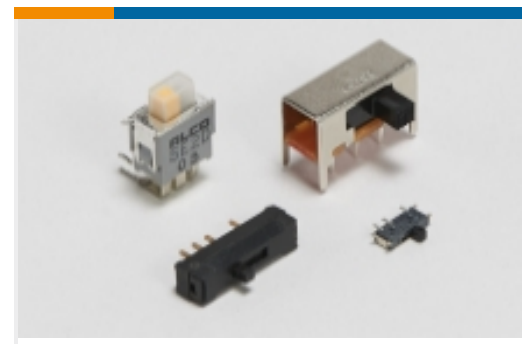


Slide Switches(5)

Customers Also Bought

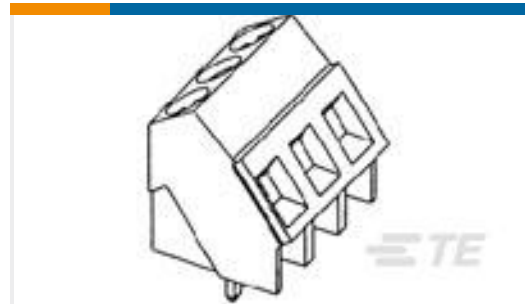

TE Part #2-796689-0
TERMI-BLOK PCB MOUNT 35 20P.

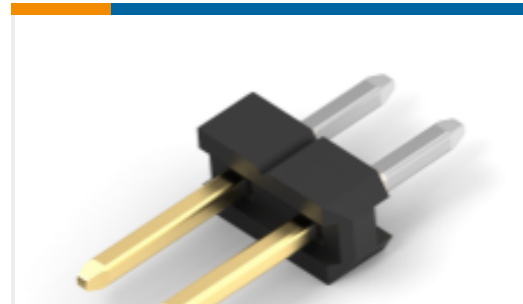

TE Part #2355172-2
2P,2MM,BRK HDR,SRVT,2.8,0.1AU,BOX



TE Part #A07919-000
T1K-254064-10-9



TE Part #1-826539-5
15P MOD 1 UNSHROUDED HEADER,
ST, 0.8 Au



TE Part #4-644892-2
12P CST100 SHRD HDR ASSY LF



TE Part #966645-6
2x6P HV100 REC. CON, SMD, GOLD,
TUBE PACK



TE Part #2-2176376-6
RQ 0805 22K6 0.1% 10PPM 1K RL



TE Part #3-1393763-2
V23100V4315B000



TE Part #3-1393763-3
V23100V4315B010

Documents

Product Drawings

[6/4 PCB MOD.JACK SE](#)

English

CAD Files

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_3-215876-2_L.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_3-215876-2_L.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-215876-2_L.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[side entry, bottom entry, top entry and toolless modular jack](#)

English

Product Specification

English