

3-644611-5 ✓ ACTIVE



## MTA 156

TE Internal #: 3-644611-5

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [.156 in] Centerline, Printed Circuit Board, UL 94V-0, MTA 156

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **5**

Centerline (Pitch): **3.96 mm [.156 in]**

### Features

#### Product Type Features

Header Type	Partially Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

#### Configuration Features

Keying & Polarized Position Locations	None
Number of Positions	5
PCB Mount Orientation	Vertical
Number of Power Positions	5
Number of Rows	1

#### Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------



### Contact Features

Mating Post Length	11.43 mm[.45 in]
PCB Contact Termination Area Plating Material Thickness	2.54 $\mu$ m[100 $\mu$ in]
Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	7 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	3.81 $\mu$ m[150 $\mu$ in]

### Termination Features

Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

### Mechanical Attachment

Strain Relief	Without
Mating Retention	With
Mating Alignment	Without
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Polarized Lock
Connector Mounting Type	Board Mount

### Housing Features

Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Natural
Housing Material	Thermoplastic Polyester

### Dimensions

Connector Height	13.84 mm[.545 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Product Length	19.69 mm[.775 in]



### Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

### Operation/Application

Circuit Application	Power
---------------------	-------

### Industry Standards

CSA Rating	Certified, LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

### Packaging Features

Packaging Quantity	500
Packaging Method	Bag

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # CAT-103156-WBHSM  
Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156



TE Part # 640251-5  
05P SL156 HSG W/O LCK RAMP



TE Part # 640551-5  
05P MTA156 COVER



TE Part # 3-640431-5  
05P MTA156 CONN ASSY 18AWG ORA



TE Part # 3-643818-5  
05P MTA156 CONN ASSY 20AWG YEL



TE Part # 3-640433-5  
05P MTA156 CONN ASSY 22AWG RED



TE Part # 3-640427-5  
05P MTA156 CONN ASSY 20AWG YEL



TE Part # 3-643817-5  
05P MTA156 CONN ASSY 18AWG ORA



TE Part # 640643-5  
05P MTA156 COVER F/T



TE Part # 3-643819-5  
05P MTA156 CONN ASSY 22AWG RED



TE Part # 3-640599-5  
05P MTA156 CONN ASSY 18AWG ORA



TE Part # 3-640432-5  
05P MTA156 CONN ASSY 20AWG YEL ORA



TE Part # 3-640600-5  
05P MTA156 CONN ASSY 20AWG LF



TE Part # 3-640601-5  
05P MTA156 CONN ASSY 22AWG LF



TE Part # 3-640604-5  
05P MTA156 CONN ASSY 18AWG LF



TE Part # 643067-5  
05P MTA156 MOLDED COVER



TE Part # 643071-5  
05P MTA156 FD-THRU COVER



TE Part # 3-644465-5  
05P MTA156 CONN ASSY 18AWG ORA



TE Part # 3-644466-5  
05P MTA156 CONN ASSY 20AWG YEL




TE Part # 3-640602-5  
05P MTA156 CONN ASSY 24AWG LF

## Also in the Series | MTA 156




Connector Caps & Covers(89)

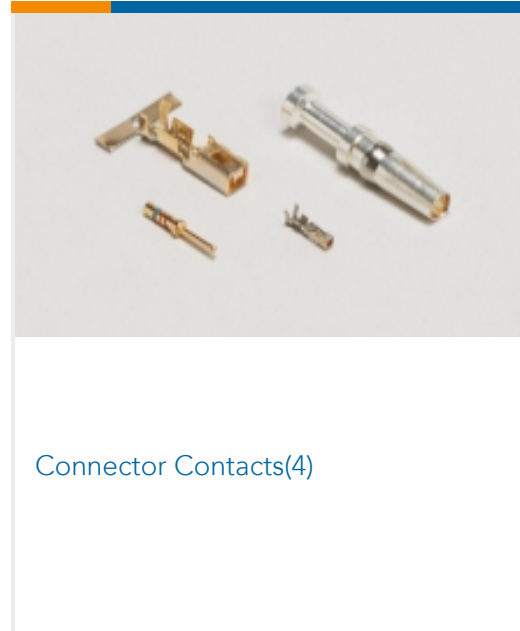

Connector Contacts(4)



Connector Hardware(2)

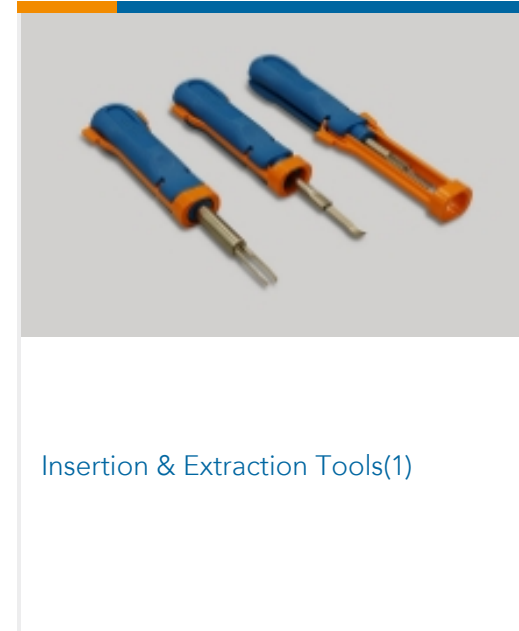


Insertion & Extraction Tools(1)



PCB Headers & Receptacles(314)



Rectangular Power Connectors(691)

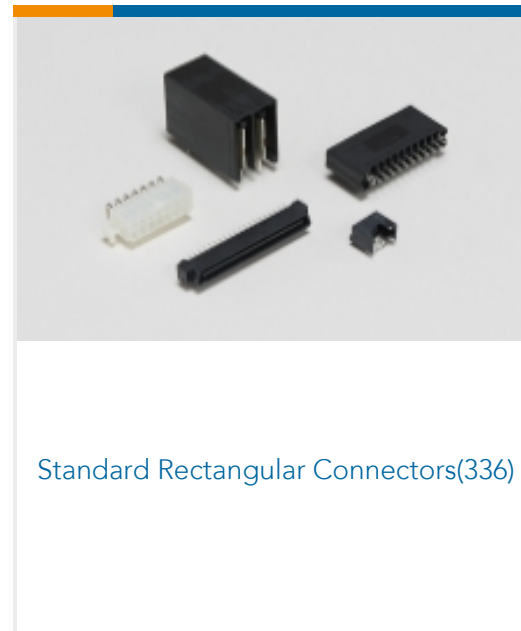

Standard Rectangular Connectors(336)


## Customers Also Bought



TE Part #6-6609107-4  
CORCOM P SERIES MULTI-FUNCTION INLET FIL



TE Part #66183-1  
Pin and Socket Contacts, Type III, LP

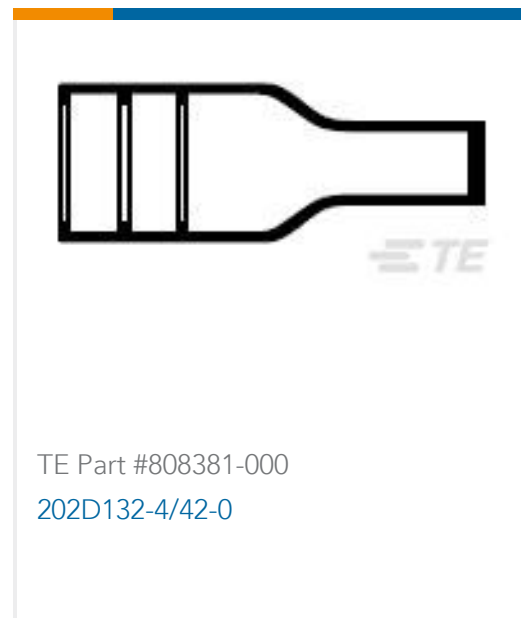

TE Part #808381-000  
202D132-4/42-0



TE Part #2280380-1  
KIT, BT, MICRO SDE, 110V



TE Part #66261-4  
MALE CONTACT ASSY. (L.P.)



TE Part #66740-2  
TYPE XII FEMALE CONT (L.P.)



TE Part #52924  
TERMINAL,PIDG SPR SPD 26-22 6



## Documents

### Product Drawings

[05P MTA156 HDR POL WO PEGS LF](#)

English

---

### CAD Files

Customer View Model

[ENG\\_CVM\\_3-644611-5\\_H1.2d\\_dxf.zip](#)

English

[3D PDF](#)

English

Customer View Model

[ENG\\_CVM\\_3-644611-5\\_H1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_3-644611-5\\_H1.3d\\_stp.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_3-644611-5\\_F.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-644611-5\\_F.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-644611-5\\_F.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Product Specifications

[Application Specification](#)

English