

# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Test plugs, color: gray



## Your advantages

- The test blocks can be used universally for voltage transducers and current transformers
- The integrated, robust switch contact is designed for the most stringent demands, and the use of high-quality materials ensures the transmission of signal currents, even after multiple actuations<br/>
- The robust test plug guarantees user-friendly handling and provides fixing options for the test cables to be connected<br/>

## Commercial Data

Item number	3069239
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	A1 - Reihenklemmen
Product Key	BE6111
Catalog Page	Page 615 (C-1-2019)
GTIN	4046356744713
Weight per Piece (including packing)	376,6 g
Weight per Piece (excluding packing)	363,5 g
Customs tariff number	85366990
Country of origin	PL

# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>

## Technical Data

### Product properties

Product type	Test plug terminal block
Number of positions	7
Pitch	8.2 mm
Potentials	7

### Electrical properties

Maximum load current	24 A
----------------------	------

### Connection data

Maximum load current	24 A
Test socket torque	0.5
Conductor cross section solid	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross section AWG	20 ... 14 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	20 ... 14 (converted acc. to IEC)
Nominal current	24 A
Nominal voltage	400 V

### Dimensions

Pin diameter	5.7 mm
Pitch	8.2 mm

### Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

### Environmental and real-life conditions

Ambient conditions

# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>



Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>



## Drawings

Circuit diagram




# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>



Circuit diagram

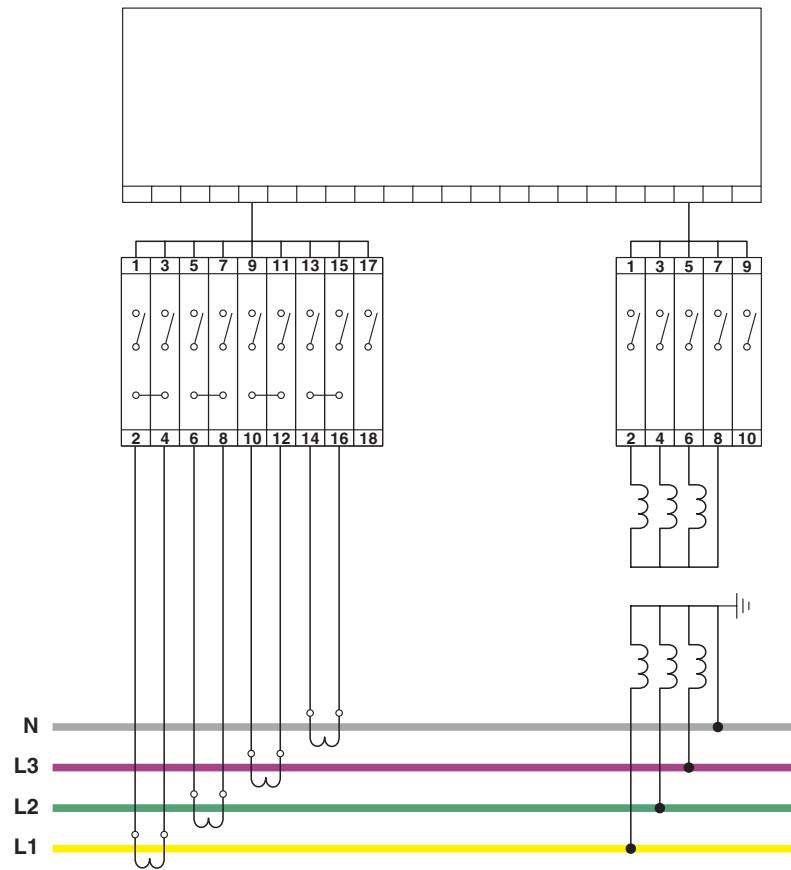

# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>



## Approvals



**EAC**

Approval ID: RU C-DE.BL08.B.00511



**cULus Recognized**

Approval ID: E60425

# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>



## Classifications

### ECLASS

ECLASS-9.0	27440313
ECLASS-10.0.1	27440313
ECLASS-11.0	27440313

### ETIM

ETIM 8.0	EC002255
----------	----------

### UNSPSC

UNSPSC 21.0	20122000
-------------	----------

# Test plugs - FTP 6+1

3069239

<https://www.phoenixcontact.com/de/produkte/3069239>



## Environmental Product Compliance

REACH SVHC

Lead 7439-92-1

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

[info@phoenixcontact.de](mailto:info@phoenixcontact.de)