

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [30968-1168](#)  
**Status:** **Active**  
**Overview:** H-DAC 64™ Dual-Row High Density Automotive Connectors  
**Description:** 2.54mm Pitch, 0.64mm Width HDAC 64™ High Density Automotive Crimp Housing, Dual Row, 16 Circuits, Polarization Option #2, Black

**Documents:**

[3D Model](#) [Application Specification AS-30700-000 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-30968-0001 \(PDF\)](#)

**General**

|                |   |
|----------------|---|
| Product Family | Crimp Housings  |
| Series         | <a href="#">30968</a>   |
| Application    | Power, Wire-to-Wire   |
| Comments       | Polarization Option #2  |
| Overview       | <a href="#">H-DAC 64™ Dual-Row High Density Automotive Connectors</a> |
| Product Name   | H-DAC 64™   |
| UPC            | 822348870370  |

**Physical**

|                               |                      |
|-------------------------------|----------------------|
| Circuits (maximum)            | 16                   |
| Circuits Detail               | 16                   |
| Color - Resin                 | Black                |
| Gender                        | Male                 |
| Glow-Wire Compliant           | No                   |
| Keying to Mating Part         | None                 |
| Lock to Mating Part           | Yes                  |
| Material - Resin              | Modified Polystyrene |
| Net Weight                    | 7.192/g              |
| Number of Rows                | 2                    |
| Packaging Type                | Bag                  |
| Panel Mount                   | No                   |
| Pitch - Mating Interface      | 2.54mm               |
| Polarized to Mating Part      | Yes                  |
| Stackable                     | No                   |
| Temperature Range - Operating | -40°C to +105°C      |


**Electrical**

|                               |    |
|-------------------------------|----|
| Current - Maximum per Contact | 7A |
|-------------------------------|----|

**Material Info**

**Reference - Drawing Numbers**

|                           |               |
|---------------------------|---------------|
| Application Specification | AS-30700-000  |
| Product Specification     | PS-30968-0001 |
| Sales Drawing             | SD-30968-120  |

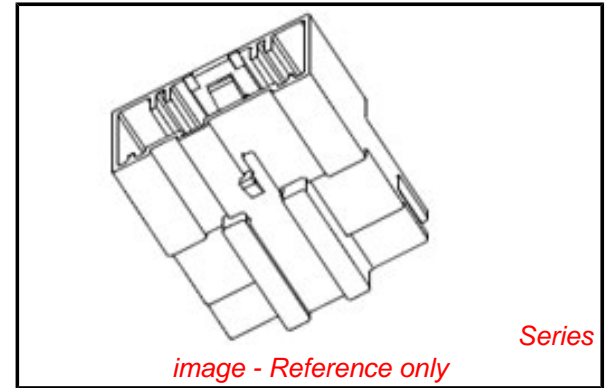

*image - Reference only*

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

**Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[30968Series](#)

**Mates With**

[307001\\*\\*\\*|313891\\*\\*\\*](#)

**Use With**

[34230 Terminal](#)