

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [31101-0040](#)
Status: **Active**
Overview: H-DAC™ 64 Single Row
Description: H-DAC 64™ 2.54mm 4 Way Vertical Header Assembly, Polarization A

Documents:

[3D Model](#) [Application Specification AS-31067-100 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-31100-0001 \(PDF\)](#)

General


Product Family	PCB Headers
Series	31101
Application	Power, Wire-to-Board
Comments	Polarization Option A, Black
Overview	H-DAC™ 64 Single Row
Product Name	H-DAC 64™
UPC	822350699792

Physical

Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Nickel
Material - Resin	Modified Polystyrene
Net Weight	1.754/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.68mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	1.524µm
Plating min - Termination	1.524µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Closed Ends
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +100°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	5A, 7A
-------------------------------	--------

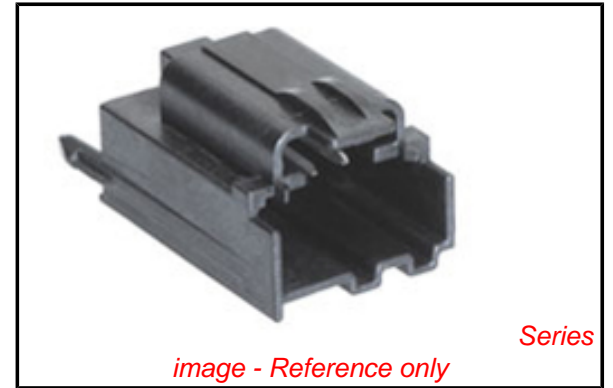

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Low-Halogen Status
Low-Halogen**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[31101Series](#)

Mates With

H-DAC 64™, 4 Way Receptacle Assembly

Voltage - Maximum 500V DC

Solder Process Data

Duration at Max. Process Temperature (seconds) 30
Lead-free Process Capability Wave Capable (TH only)
Max. Cycles at Max. Process Temperature 3
Process Temperature max. C 250

Material Info

Reference - Drawing Numbers

Application Specification AS-31067-100
Product Specification PS-31100-0001
Sales Drawing SD-31206-003

This document was generated on 06/26/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION