

Fuse modular terminal block - PT 6-FSI/C-LED 12



3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Fuse modular terminal block, fuse type: Flat, fuse type: Type C / max. 2.2 W, nom. voltage: 12 V, nominal current: 25 A, connection method: Push-in connection, Rated cross section: 6 mm², cross section: 0.5 mm²- 10 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- In addition to the testing facility in the double function shaft, all terminal blocks provide an additional test connection
- Quick identification of faulty fuses, thanks to LED status indicator
- Convenient fuse testing, thanks to test points on both sides
- The easily accessible fuse inserts are easy to use or replace
- The compact design and front connection enable wiring in a confined space
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- Suitable for all flat-type fuse-links designed according ISO 8820-3 (DIN 72581-3)

Commercial Data

Item number	3212169
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE2236
Product Key	BE2236
Catalog Page	Page 112 (C-1-2019)
GTIN	4055626394329
Weight per Piece (including packing)	19.368 g
Weight per Piece (excluding packing)	19.368 g
Customs tariff number	85369095
Country of origin	CN

Technical Data

Notes

General	The current is determined by the fuse used, the voltage by the selected LED display. Permissible continuous load in accordance with ISO 8820-2:2015 (E) is max. 70% of the nominal current of the fuse. For short-circuit protection use only.
---------	---

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Flat
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W
Fuse	Type C / max. 2.2 W
LED voltage range	6 V DC ... 12 V DC (LED red)
LED current range	0.31 mA ... 0.95 mA

Input data

LED voltage range	6 V DC ... 12 V DC (LED red)
-------------------	------------------------------

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²
Rated cross section AWG	10
Stripping length	10 mm ... 12 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section solid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 10 mm ²
Conductor cross section, flexible [AWG]	20 ... 8 (converted acc. to IEC)
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 2.5 mm ² When using TWIN ferrules, we recommend a minimum ferrule length of 13 mm.

Fuse modular terminal block - PT 6-FSI/C-LED 12



3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Nominal current	25 A (with 4 mm ² conductor cross section)
Maximum load current	30 A (In separate arrangement with 4 mm ² conductor cross section)
Nominal voltage	12 V
Nominal cross section	6 mm ²

Connection cross sections directly pluggable

Conductor cross section solid	1 mm ² ... 10 mm ²
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	1 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1 mm ² ... 6 mm ²

Dimensions

Width	8.2 mm
Height	44 mm
Height NS 35/15	53 mm
Height NS 35/7,5	45.5 mm
Length	74.1 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15


Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Drawings

Application drawing

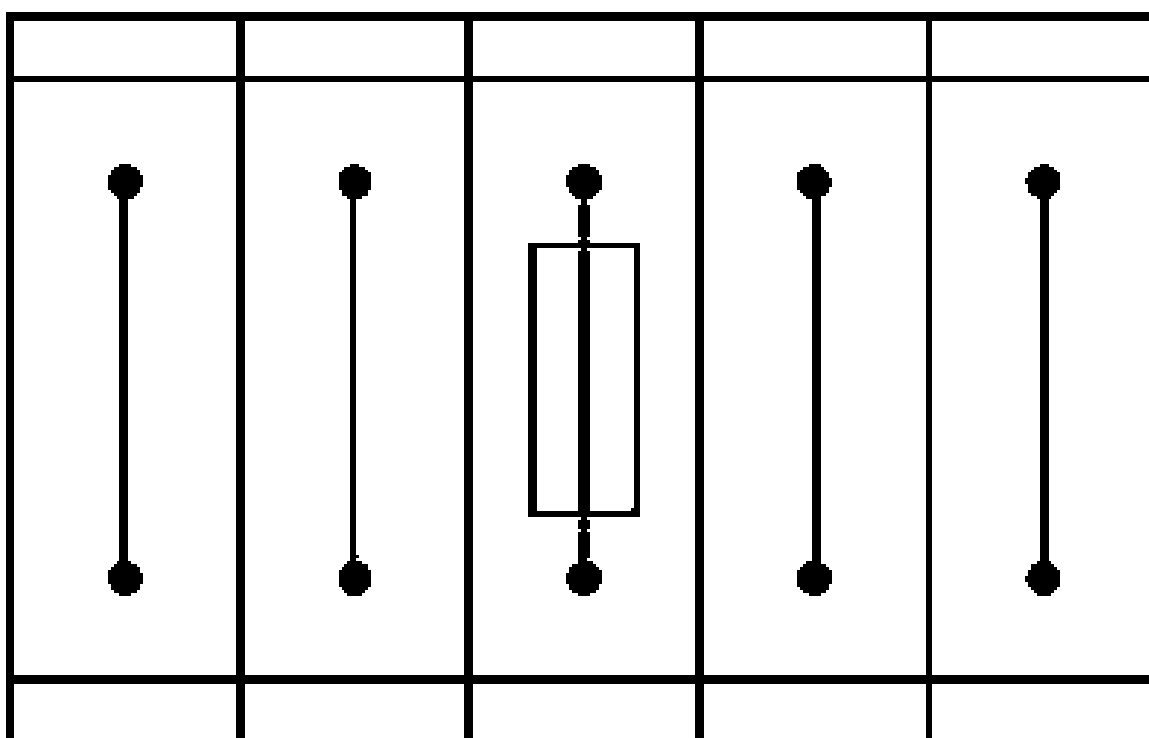


Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Application drawing

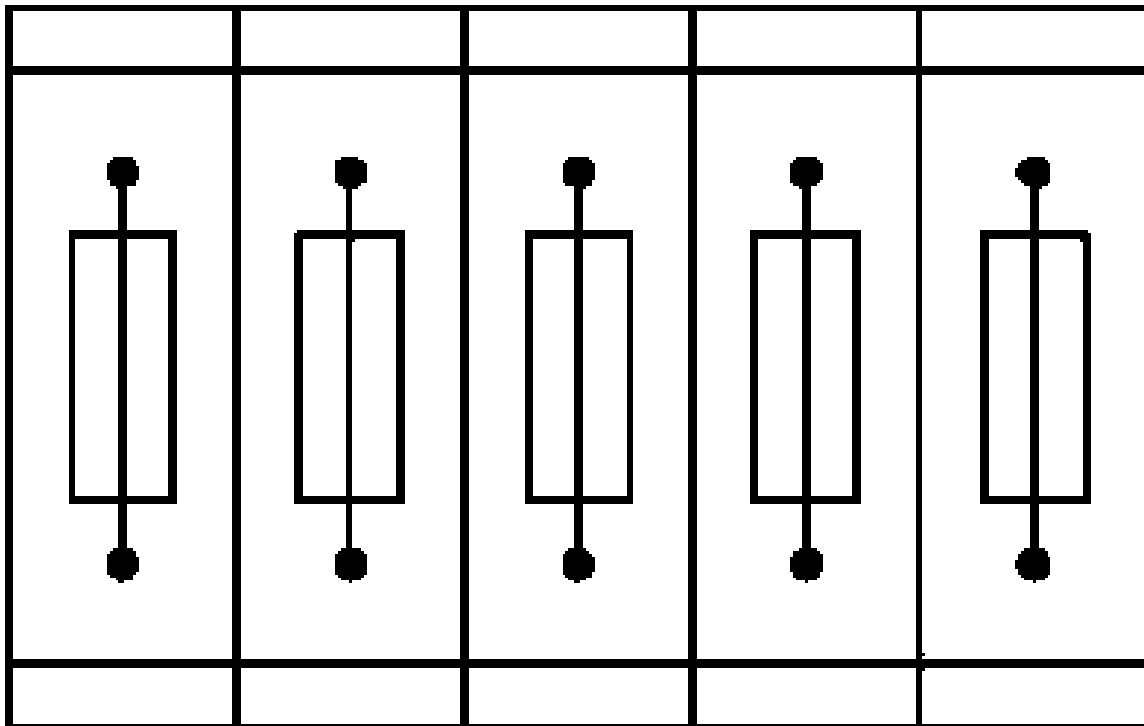


Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Circuit diagram

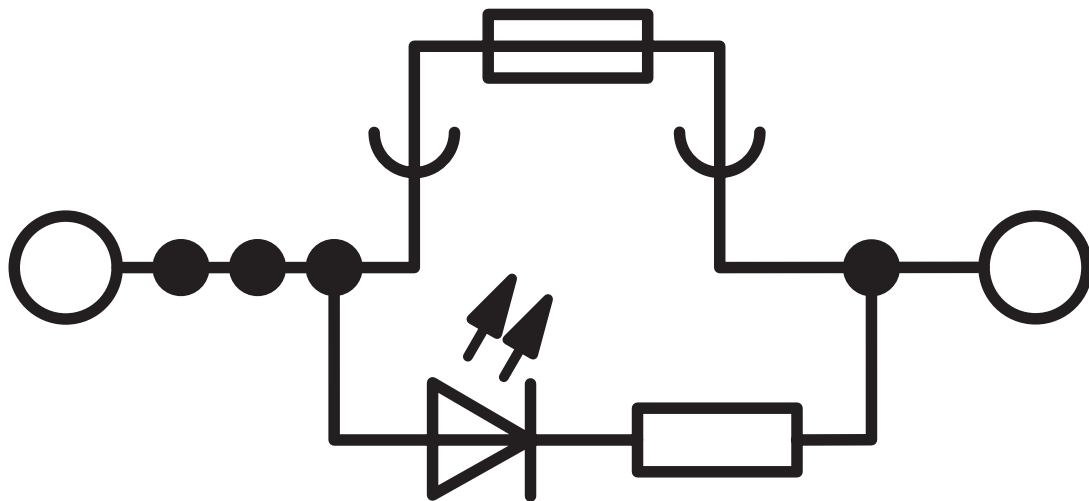


Fuse modular terminal block - PT 6-FSI/C-LED 12





3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Approvals

 CSA Approval ID: 13631				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B	300 V	25 A	20 - 8	-
Use group C	300 V	25 A	20 - 8	-
Use group D	600 V	5 A	20 - 8	-

 EAC Approval ID: RU C-DE.BL08.B.00644				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B	300 V	25 A	20 - 8	-
Use group C	300 V	25 A	20 - 8	-
Use group D	600 V	5 A	20 - 8	-

Fuse modular terminal block - PT 6-FSI/C-LED 12



3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Classifications

ECLASS

ECLASS-9.0	27141116
ECLASS-10.0.1	27141116
ECLASS-11.0	27141116

ETIM

ETIM 8.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Fuse modular terminal block - PT 6-FSI/C-LED 12



3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Accessories

 Note: Applying some accessories below might limit this product.


Plug-in bridge

Plug-in bridge - FBS 2-8 - 3030284

<https://www.phoenixcontact.com/gb/products/3030284>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 3-8 - 3030297

<https://www.phoenixcontact.com/gb/products/3030297>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 4-8 - 3030307

<https://www.phoenixcontact.com/gb/products/3030307>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 5-8 - 3030310

<https://www.phoenixcontact.com/gb/products/3030310>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 20 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 6-8 - 3032470

<https://www.phoenixcontact.com/gb/products/3032470>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 10-8 - 3030323

<https://www.phoenixcontact.com/gb/products/3030323>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 2-8 CT - 3033830

<https://www.phoenixcontact.com/gb/products/3033830>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 3-8 CT - 3033831

<https://www.phoenixcontact.com/gb/products/3033831>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 4-8 CT - 3033832

<https://www.phoenixcontact.com/gb/products/3033832>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 10-8 CT - 3033833

<https://www.phoenixcontact.com/gb/products/3033833>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 2-8 BU - 3032567

<https://www.phoenixcontact.com/gb/products/3032567>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 3-8 BU - 3032570

<https://www.phoenixcontact.com/gb/products/3032570>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 4-8 BU - 3032583

<https://www.phoenixcontact.com/gb/products/3032583>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 5-8 BU - 3032596

<https://www.phoenixcontact.com/gb/products/3032596>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 6-8 BU - 3032677

<https://www.phoenixcontact.com/gb/products/3032677>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 10-8 BU - 3032606

<https://www.phoenixcontact.com/gb/products/3032606>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 2-8 GY - 3032621

<https://www.phoenixcontact.com/gb/products/3032621>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 3-8 GY - 3032622

<https://www.phoenixcontact.com/gb/products/3032622>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBS 4-8 GY - 3032635

<https://www.phoenixcontact.com/gb/products/3032635>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 5-8 GY - 3032648

<https://www.phoenixcontact.com/gb/products/3032648>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Plug-in bridge

Plug-in bridge - FBS 6-8 GY - 3032664

<https://www.phoenixcontact.com/gb/products/3032664>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBS 10-8 GY - 3032651

<https://www.phoenixcontact.com/gb/products/3032651>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBSR 2-8 - 3033808

<https://www.phoenixcontact.com/gb/products/3033808>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBSR 3-8 - 3001597

<https://www.phoenixcontact.com/gb/products/3001597>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Plug-in bridge

Plug-in bridge - FBSR 4-8 - 3000585

<https://www.phoenixcontact.com/gb/products/3000585>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBSR 5-8 - 3033809

<https://www.phoenixcontact.com/gb/products/3033809>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>


Plug-in bridge

Plug-in bridge - FBSR 10-8 - 3001599

<https://www.phoenixcontact.com/gb/products/3001599>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A


Plug-in bridge

Plug-in bridge - FBSR 16-8 - 3033816

<https://www.phoenixcontact.com/gb/products/3033816>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 30 A

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Partition plate

Partition plate - ATP-ST 4 - 3030721

<https://www.phoenixcontact.com/gb/products/3030721>



Partition plate, length: 59.8 mm, width: 2 mm, height: 39 mm, color: gray

Screwdriver

Screwdriver - SZF 1-0,6X3,5 - 1204517

<https://www.phoenixcontact.com/gb/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Mounting material

Mounting material - PT-IL - 3208090

<https://www.phoenixcontact.com/gb/products/3208090>

Operating decal for the push-in Technology



Actuation tool

Actuation tool - ST-BW - 1207608

<https://www.phoenixcontact.com/gb/products/1207608>

Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages



Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Warning label

Warning label - WS PT 6 - 1029029

<https://www.phoenixcontact.com/gb/products/1029029>



Warning label, yellow/black, labeled: Lightning flash, mounting type: plug in, for terminal block width: 8.2 mm

Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,1A - 0712107

<https://www.phoenixcontact.com/gb/products/0712107>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,25A - 0712123

<https://www.phoenixcontact.com/gb/products/0712123>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Thermal device circuit breaker

Thermal device circuit breaker - TCP 0,5A - 0712152

<https://www.phoenixcontact.com/gb/products/0712152>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 1A - 0712194

<https://www.phoenixcontact.com/gb/products/0712194>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Thermal device circuit breaker

Thermal device circuit breaker - TCP 2A - 0712217

<https://www.phoenixcontact.com/gb/products/0712217>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 3A - 0712233

<https://www.phoenixcontact.com/gb/products/0712233>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Thermal device circuit breaker

Thermal device circuit breaker - TCP 4A - 0712259

<https://www.phoenixcontact.com/gb/products/0712259>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 6A - 0712275

<https://www.phoenixcontact.com/gb/products/0712275>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Thermal device circuit breaker

Thermal device circuit breaker - TCP 8A - 0712291

<https://www.phoenixcontact.com/gb/products/0712291>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 10A - 0712314

<https://www.phoenixcontact.com/gb/products/0712314>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

Thermal device circuit breaker

Thermal device circuit breaker - TCP 5/DC32V - 0700005

<https://www.phoenixcontact.com/gb/products/0700005>



Thermal device circuit breaker, number of positions: 1, nominal current: 5 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: light brown

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 7,5/DC32V - 0700007

<https://www.phoenixcontact.com/gb/products/0700007>



Thermal device circuit breaker, number of positions: 1, nominal current: 7.5 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: brown

Thermal device circuit breaker

Thermal device circuit breaker - TCP 10/DC32V - 0700010

<https://www.phoenixcontact.com/gb/products/0700010>



Thermal device circuit breaker, number of positions: 1, nominal current: 10 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: red

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 15/DC32V - 0700015

<https://www.phoenixcontact.com/gb/products/0700015>



Thermal device circuit breaker, number of positions: 1, nominal current: 15 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: blue

Thermal device circuit breaker

Thermal device circuit breaker - TCP 20/DC32V - 0700020

<https://www.phoenixcontact.com/gb/products/0700020>



Thermal device circuit breaker, number of positions: 1, nominal current: 20 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: yellow

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Thermal device circuit breaker

Thermal device circuit breaker - TCP 25/DC32V - 0700025

<https://www.phoenixcontact.com/gb/products/0700025>



Thermal device circuit breaker, number of positions: 1, nominal current: 25 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: white

Thermal device circuit breaker

Thermal device circuit breaker - TCP 30/DC32V - 0700030

<https://www.phoenixcontact.com/gb/products/0700030>



Thermal device circuit breaker, number of positions: 1, nominal current: 30 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element, Color: light green

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/gb/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/gb/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/gb/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/gb/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/gb/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/gb/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/gb/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/gb/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/gb/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



DIN rail perforated

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730

<https://www.phoenixcontact.com/gb/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714

<https://www.phoenixcontact.com/gb/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail perforated

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602

<https://www.phoenixcontact.com/gb/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM-VPE 10 - 1204135

<https://www.phoenixcontact.com/gb/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756

<https://www.phoenixcontact.com/gb/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail perforated

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599

<https://www.phoenixcontact.com/gb/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586

<https://www.phoenixcontact.com/gb/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM-VPE 10 - 1201895

<https://www.phoenixcontact.com/gb/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

End cap

End cap - NS 35/15 CAP - 1206573

<https://www.phoenixcontact.com/gb/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM-VPE 10 - 1201798

<https://www.phoenixcontact.com/gb/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8:UNBEDRUCKT - 0808781

<https://www.phoenixcontact.com/gb/products/0808781>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8 CUS - 0825030

<https://www.phoenixcontact.com/gb/products/0825030>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8,LGS:FORTL.ZAHLEN - 0808804

<https://www.phoenixcontact.com/gb/products/0808804>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

Fuse modular terminal block - PT 6-FSI/C-LED 12



3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Marker for terminal blocks

Marker for terminal blocks - UC-TMF 8 - 0818137

<https://www.phoenixcontact.com/gb/products/0818137>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

Marker for terminal blocks

Marker for terminal blocks - UC-TMF 8 CUS - 0824654

<https://www.phoenixcontact.com/gb/products/0824654>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 8 - 0828748

<https://www.phoenixcontact.com/gb/products/0828748>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 8 CUS - 0829672

<https://www.phoenixcontact.com/gb/products/0829672>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Insulating sleeve

Insulating sleeve - ISH 4/0,5 - 3002885

<https://www.phoenixcontact.com/gb/products/3002885>



Insulating sleeve, color: gray

Insulating sleeve

Insulating sleeve - ISH 4/1,0 - 3002898

<https://www.phoenixcontact.com/gb/products/3002898>



Insulating sleeve, color: black

Fuse modular terminal block - PT 6-FSI/C-LED 12


3212169

<https://www.phoenixcontact.com/gb/products/3212169>

Software

Software - PROJECT COMPLETE - 1050453

<https://www.phoenixcontact.com/gb/products/1050453>



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

End clamp

End clamp - CLIPFIX 35 - 3022218

<https://www.phoenixcontact.com/gb/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

Fuse modular terminal block - PT 6-FSI/C-LED 12

3212169

<https://www.phoenixcontact.com/gb/products/3212169>

End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/gb/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

End clamp

End clamp - E/NS 35 N - 0800886

<https://www.phoenixcontact.com/gb/products/0800886>



End clamp, width: 9.5 mm, color: gray

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk