

COMBI receptacle - PPC 1,5/S-NS/5



3213413

<https://www.phoenixcontact.com/de/produkte/3213413>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



COMBI receptacle, nom. voltage: 500 V, nominal current: 17.5 A, connection method: Push-in connection, 1 level, Rated cross section: 1.5 mm², cross section: 0.14 mm² - 1.5 mm², color: gray

Your advantages

- For secure and space-saving accommodation of plug-in contacts in cable ducts and distributor shafts
- The Push-in technology COMBI couplings for self-assembly provide solutions that users can implement themselves

Commercial Data

| | |
|--------------------------------------|--------------------|
| Item number | 3213413 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales Key | A1 - Reihenklemmen |
| Product Key | BE2245 |
| GTIN | 4046356802581 |
| Weight per Piece (including packing) | 9,68 g |
| Weight per Piece (excluding packing) | 9,68 g |
| Customs tariff number | 85366990 |
| Country of origin | PL |

COMBI receptacle - PPC 1,5/S-NS/5



3213413

<https://www.phoenixcontact.com/de/produkte/3213413>

Technical Data

Product properties

| | |
|-----------------------|-------------------|
| Product type | Terminal coupling |
| Number of positions | 5 |
| Pitch | 3.5 mm |
| Number of connections | 1 |
| Number of rows | 1 |
| Type | other |
| Potentials | 5 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 0.56 W |

Connection data

| | |
|-----------------------|---------------------|
| Nominal cross section | 1.5 mm ² |
|-----------------------|---------------------|

1 level

| | |
|---|---|
| Stripping length | 8 mm |
| Internal cylindrical gage | A1 / B1 |
| Connection in acc. with standard | IEC 61984 |
| Conductor cross section solid | 0.14 mm ² ... 1.5 mm ² |
| Cross section AWG | 26 ... 14 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 1.5 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 14 (converted acc. to IEC) |
| Flexible conductor cross section flexible (ferrule, w/o plastic sleeve) | 0.14 mm ² ... 1.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 1 mm ² |
| Nominal current | 17.5 A |
| Maximum load current | 17.5 A (with 1.5 mm ² conductor cross section) |
| Nominal voltage | 500 V |
| Nominal cross section | 1.5 mm ² |

1 level Connection cross sections directly pluggable

| | |
|---|--|
| Conductor cross section solid | 0.25 mm ² ... 1.5 mm ² |
| Flexible conductor cross section flexible (ferrule, w/o plastic sleeve) | 0.34 mm ² ... 1.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.34 mm ² ... 1 mm ² |

Dimensions

COMBI receptacle - PPC 1,5/S-NS/5



3213413

<https://www.phoenixcontact.com/de/produkte/3213413>

| | |
|------------------|---------|
| Width | 17.5 mm |
| End cover width | 2.2 mm |
| Height | 27.1 mm |
| Height NS 15 | 28.3 mm |
| Height NS 35/15 | 35.8 mm |
| Height NS 35/7,5 | 28.3 mm |
| Length | 43 mm |
| Pitch | 3.5 mm |

Material specifications

| | |
|---|-------------|
| Color | gray |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions


| | |
|--|---|
| Ambient temperature (operation) | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
|----------------------------------|-----------|

Drawings

Diagram

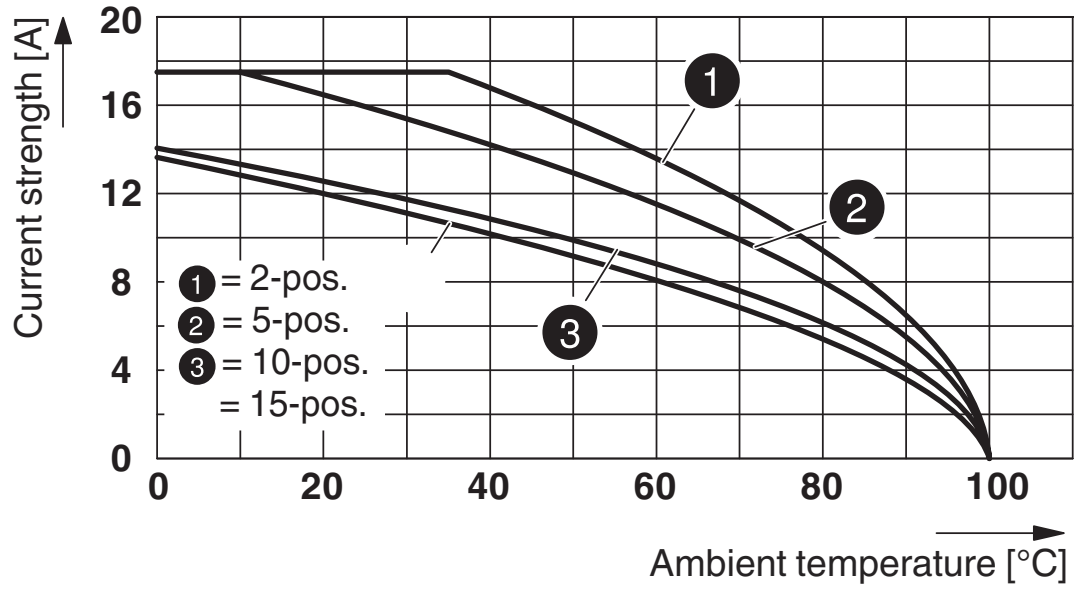

Circuit diagram



COMBI receptacle - PPC 1,5/S-NS/5

3213413

<https://www.phoenixcontact.com/de/produkte/3213413>



Approvals



EAC

Approval ID: RU C-DE.BL08.B.00511

COMBI receptacle - PPC 1,5/S-NS/5



3213413

<https://www.phoenixcontact.com/de/produkte/3213413>

Classifications

ECLASS

| | |
|---------------|----------|
| ECLASS-9.0 | 27141120 |
| ECLASS-10.0.1 | 27141120 |
| ECLASS-11.0 | 27141120 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC000897 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

COMBI receptacle - PPC 1,5/S-NS/5



3213413

<https://www.phoenixcontact.com/de/produkte/3213413>

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH
Flachmarktstraße 8
D-32825 Blomberg
+49 52 35/3-1 20 00
info@phoenixcontact.de