







1

2


3

4

5

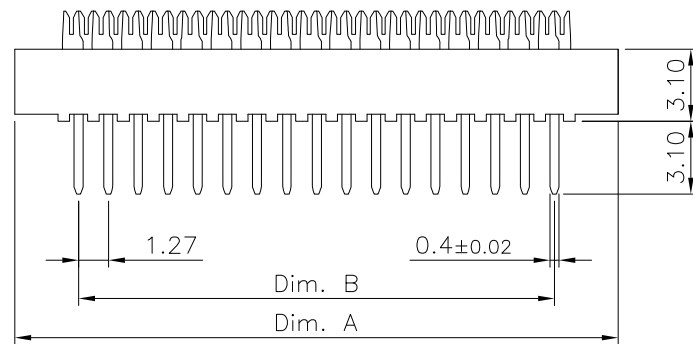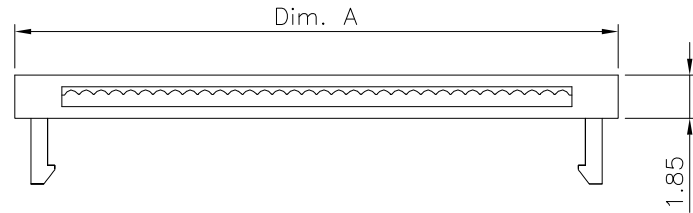


Specifications:
 Current Rating: 0.5A AC,DC
 Contact Resistance: 30m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 250V AC/Minute
 Operating Temperature Range: -40°C ~ +105°C



Material And Finish:
 Insulator:PBT UL94V-0
 Insulator Color: Black
 Contact: Brass
 Plated: Selective Gold Plated

CIRCUITS	DIM.A	DIM.B
10	10.54	5.08
14	13.08	7.62
16	14.35	8.89
20	16.89	11.43
26	20.70	15.24
40	29.59	24.13

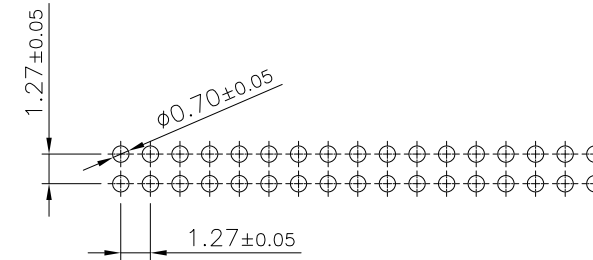

P.C.B Layout

RoHS Compliant

REV	DATE	FILE	BY
	17-Nov-2020		

DRAWN:	APPROVAL:
CHECKED:	

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
UNIT: MM
SCALE:1:1
SHEET: 1 / 1
PROJECTION:

CnC Tech Industrial Cable and Connector Technology	
DESCRIPTION: 1.27*1.27mm Flat Cable IDC Dip Plug	SIZE A4
PART NO: 3240-XX-00	

A

B

C

D