

High-current terminal block - PTPOWER 50 OG



3260069

<https://www.phoenixcontact.com/de/produkte/3260069>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



High-current terminal block, nom. voltage: 1000 V, nominal current: 150 A, connection method: PowerTurn connection, 1 level, cross section: 10 mm² - 70 mm², mounting type: NS 35/15, color: orange

Your advantages

- Quick and easy connection is now also possible for large conductors with the high-current terminal block
- In addition to using the existing test connection, pick-off terminal blocks can be connected, each of which can also accommodate two test cables
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- The compact design enables wiring in a confined space

Commercial Data

| | |
|--------------------------------------|--------------------|
| Item number | 3260069 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales Key | A1 - Reihenklemmen |
| Product Key | BE2211 |
| GTIN | 4055626230535 |
| Weight per Piece (including packing) | 157,29 g |
| Weight per Piece (excluding packing) | 157,29 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |

Technical Data

Product properties

| | |
|-----------------------|-----------------------------|
| Product type | High current terminal block |
| Number of positions | 1 |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 4.73 W |

Connection data

| | |
|---------------------------------|--------------------|
| Number of connections per level | 2 |
| Nominal cross section | 50 mm ² |
| Rated cross section AWG | 2/0 |

1 level

| | |
|--|---|
| Stripping length | 30 mm ... 32 mm |
| Internal cylindrical gage | A10 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section solid | 10 mm ² ... 70 mm ² |
| Cross section AWG | 8 ... 2/0 (converted acc. to IEC) |
| Conductor cross section flexible | 10 mm ² ... 70 mm ² |
| Conductor cross section, flexible [AWG] | 8 ... 2/0 (converted acc. to IEC) |
| Flexible conductor cross section flexible (ferrule, w/o plastic sleeve) | 10 mm ² ... 50 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 10 mm ² ... 50 mm ² |
| Cross-section with insertion bridge, rigid | 10 mm ² ... 50 mm ² |
| Cross-section with insertion bridge, flexible | 10 mm ² ... 50 mm ² |
| Cross-section with insertion bridge, flexible, with ferrule without plastic sleeve | 10 mm ² ... 50 mm ² |
| Cross-section with insertion bridge, flexible, with ferrule with plastic sleeve | 10 mm ² ... 50 mm ² |
| Nominal current | 150 A |
| Maximum load current | 150 A (with 70 mm ² conductor cross section) |
| Nominal voltage | 1000 V |

1 level Connection cross sections directly pluggable

| | |
|--------------------------------------|---|
| Conductor cross section solid | 10 mm ² ... 70 mm ² |
| Conductor cross section, solid [AWG] | 8 ... 2/0 (converted acc. to IEC) |

High-current terminal block - PTPOWER 50 OG



3260069

<https://www.phoenixcontact.com/de/produkte/3260069>

| | |
|---|---|
| Flexible conductor cross section flexible (ferrule, w/o plastic sleeve) | 10 mm ² ... 50 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 10 mm ² ... 50 mm ² |

Ex data

Rated data (ATEX/IECEX)

| | |
|-----------------------------------|--|
| Identification | □ II 2 GD Ex eb IIC Gb |
| Operating temperature range | -60 °C ... 110 °C |
| Ex-certified accessories | 1206612 SZF 3-1,0X5,5 1201662 E/AL-NS 35 |
| List of bridges | / EB 2-20/PT / 3260067 / EB 3-20/PT / 3260068 |
| Bridge data | 131 A / 50 mm ² |
| Ex temperature increase | 40 K (147 A / 50 mm ²) |
| Rated voltage | 1100 V |
| at bridging with insertion bridge | 1100 V |
| Rated insulation voltage | 1000 V |
| output | (Permanent) |

Ex level General

| | |
|----------------------|---------|
| Rated current | 134 A |
| Maximum load current | 134 A |
| Contact resistance | 0.16 mΩ |

Ex connection data General

| | |
|--|---|
| Ferrule length | 30 mm ... 32 mm |
| Stripping length | 30 mm |
| Nominal cross section | 50 mm ² |
| Rated cross section AWG | 1/0 |
| Connection capacity rigid | 10 mm ² ... 70 mm ² |
| Connection capacity AWG | 8 ... 2/0 |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 16 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 50 mm ² |

Dimensions

| | |
|-----------------|--------|
| Width | 20 mm |
| Height NS 35/15 | 105 mm |
| Length | 101 mm |

Material specifications

| | |
|--|--------|
| Color | orange |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |

High-current terminal block - PTPOWER 50 OG



3260069

<https://www.phoenixcontact.com/de/produkte/3260069>

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|----------|
| Mounting type | NS 35/15 |
|---------------|----------|

High-current terminal block - PTPOWER 50 OG

3260069

<https://www.phoenixcontact.com/de/produkte/3260069>



Drawings

Circuit diagram



High-current terminal block - PTPOWER 50 OG


3260069

<https://www.phoenixcontact.com/de/produkte/3260069>




Schematic diagram

PTPOWER



| | | |
|----------------|--|-------|
| AGK 10-PTPOWER | 0,5 mm ² ... 16 mm ² | 18 mm |
| PTPOWER 35 | 2,5 mm ² ... 35 mm ² | 25 mm |
| PTPOWER 50 | 10 mm ² ... 50 mm ² | 32 mm |
| PTPOWER 95 | 25 mm ² ... 95 mm ² | 40 mm |
| PTPOWER 185 | 95 mm ² ... 185 mm ² | 40 mm |

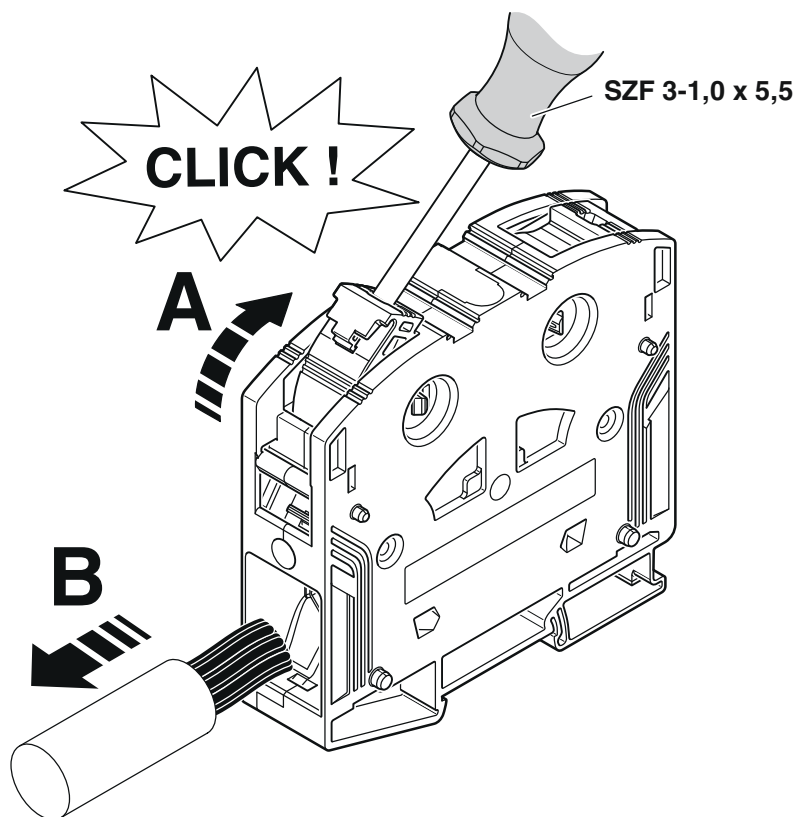


High-current terminal block - PTPOWER 50 OG





3260069


<https://www.phoenixcontact.com/de/produkte/3260069>

Approvals


|  CSA Approval ID: 13631 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group B | 600 V | 140 A | 8 - 1/0 | - |
| Use group C | 1000 V | 140 A | 8 - 1/0 | - |


|  cUL Recognized Approval ID: E60425 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group C | 1000 V | 140 A | 8 - 1/0 | - |

|  UL Recognized Approval ID: E60425 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group E | 1000 V | 140 A | 8 - 1/0 | - |

|  EAC Approval ID: RU C-DE.AI30.B.01102 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

| DNV Approval ID: TAE00000Z9 | | | | |
|---------------------------------------|--|--|--|--|
|---------------------------------------|--|--|--|--|

|  CCC Approval ID: 2020322313000630 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  UKCA-EX Approval ID: CML 22UKEX1227U | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

|  IECEx Approval ID: IECExSEV14.0013U | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| | 1100 V | 134 A | - | 10 - 70 |

High-current terminal block - PTPOWER 50 OG



3260069

<https://www.phoenixcontact.com/de/produkte/3260069>



ATEX

Approval ID: SEV14ATEX0156U

| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 1100 V | 134 A | - | 10 - 70 |

cULus Recognized

High-current terminal block - PTPOWER 50 OG



3260069

<https://www.phoenixcontact.com/de/produkte/3260069>

Classifications

ECLASS

| | |
|---------------|----------|
| ECLASS-9.0 | 27141120 |
| ECLASS-10.0.1 | 27141120 |
| ECLASS-11.0 | 27141120 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC000897 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

High-current terminal block - PTPOWER 50 OG



3260069

<https://www.phoenixcontact.com/de/produkte/3260069>

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH
Flachmarktstraße 8
D-32825 Blomberg
+49 52 35/3-1 20 00
info@phoenixcontact.de