Part Number: 33468-0024

Status: Active

Overview: MX64 Sealed Single Row Connectors

Description: 2.54mm Pitch MX64™ Terminal, Tin (Sn) Plating, 0.50-0.75mm2 Wire, Left Reel Payoff, Also used with MX123™ Female Receptacle Housing

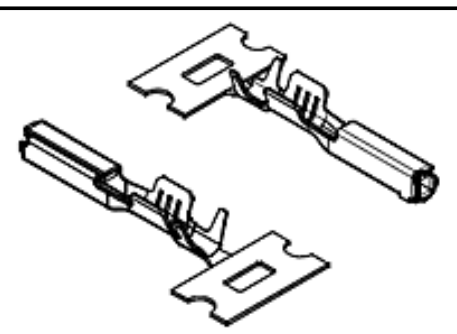

Series

image - Reference only

Documents:

Drawing (PDF)
Product Specification PS-33468-001 (PDF)
Application Specification AS-33468-002 (PDF)
RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Terminals
Series	33468
Application	Power
Comments	Right Reel Payoff
Crimp Quality Equipment	Yes
Overview	MX64 Sealed Single Row Connectors
Product Name	MX123, MX64™
UPC	884982720640

Physical

Gender	Female
Material - Metal	Copper
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.222/g
Packaging Type	Reel
Plating min - Mating	2.540µm
Plating min - Termination	1.905µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.50-2.06mm
Wire Size AWG	N/A
Wire Size mm²	0.50-0.75MM

Material Info

Reference - Drawing Numbers

Application Specification	AS-33468-002
Product Specification	PS-33468-001
Sales Drawing	SD-33468-002

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
33468Series

Use With
MX64™ Sealed Single Row Crimp Housing 31403 , MX123™ Female Receptacle Housing 34566 , 34576

Application Tooling | **FAQ**

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Tool for MX64™ ISO Terminal	0638258400