


3M™ Pak 100 4-Wall Condo Header

.100" × .100" Right Angle, High Temp Option

3000 Series

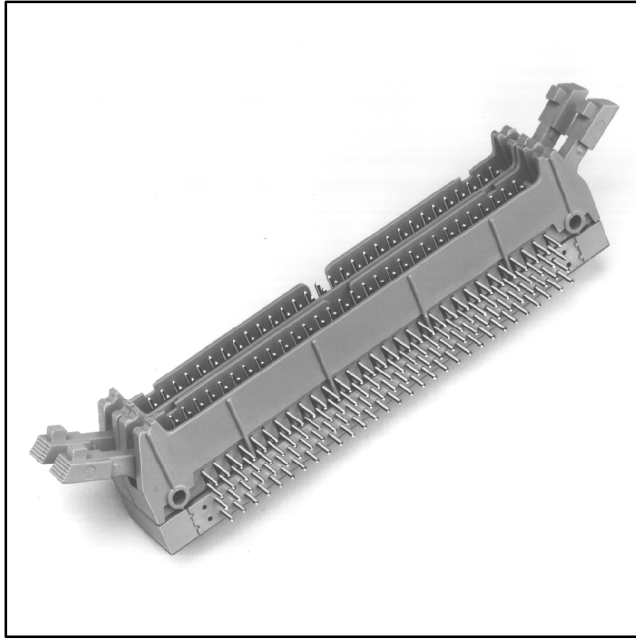

- Stacked pins conserve space on the circuit board allowing higher density packaging
- Pin quantity to 128 gives design flexibility with latching
- “HDI” alternative
- Accepts standard IDC sockets
- Mates with standard flat cable harnesses
- High temperature option

Date Modified: May 30, 2003

TS-0774-03
Sheet 1 of 3

Physical

Insulation

Material: Glass Filled Polyester (PBT)
Glass Filled Polyester (PCT — High Temp Option)

Flammability: UL 94V-0

Color: Gray
Beige (High Temp Option)

Contact

Material: Copper Alloy

Plating

Underplate: 100 μ" [2.54 μm] Nickel — QQ-N-290, Class 2
Wiping Area: 30 μ" [0.76 μm] Gold — MIL-G-45204, Type II, Grade C
Solder Tails: 200 μ" [5.08 μm] Tin Lead — MIL-P-81728

Marking: 3M Logo, Part Identification Number and Orientation Triangle

Electrical

Current Rating: 1 A

Insulation Resistance: $>1 \times 10^9 \Omega$ at 500 Vdc

Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating: -55°C to +105°C

High Temp Process Rating: Maximum 235°C, with 90 seconds over 215°C

UL File No.: E68080


3M™ Pak 100 4-Wall Condo Header

.100" × .100" Right Angle, High Temp Option

3000 Series

Pin Quantity	Part Number	Dimensions			Polarization Notches
		A	C	D	
20	3793	1.26 [32.1]	0.865 [21.97]	0.71 [18.0]	B C
28	3314	1.46 [37.2]	1.065 [27.05]	0.91 [23.1]	B C
32	3408	1.56 [39.7]	1.165 [29.59]	1.01 [25.6]	A B C
40	3428	1.76 [44.8]	1.365 [34.67]	1.21 [30.7]	A B C
48	3627	1.96 [49.9]	1.565 [39.75]	1.41 [35.8]	A B C
52	3429	2.06 [52.4]	1.665 [42.29]	1.51 [38.3]	A B C
60	3440	2.26 [57.5]	1.865 [47.37]	1.71 [43.4]	A B C
68	3431	2.46 [62.6]	2.065 [52.45]	1.91 [48.5]	A B C
80	3432	2.76 [70.2]	2.365 [60.07]	2.21 [56.1]	A B C
100	3433	3.26 [82.9]	2.865 [72.77]	2.71 [68.8]	A B C
120	3372	3.76 [95.6]	3.365 [85.47]	3.21 [81.5]	A B C
128	3764	3.96 [100.7]	3.565 [90.55]	3.41 [86.6]	A B C

3M Part Number Suffix	Contact Tail	Dim E ± .010
-XX02	02	0.112 [2.84]
-XX03	03*	0.155 [3.94]

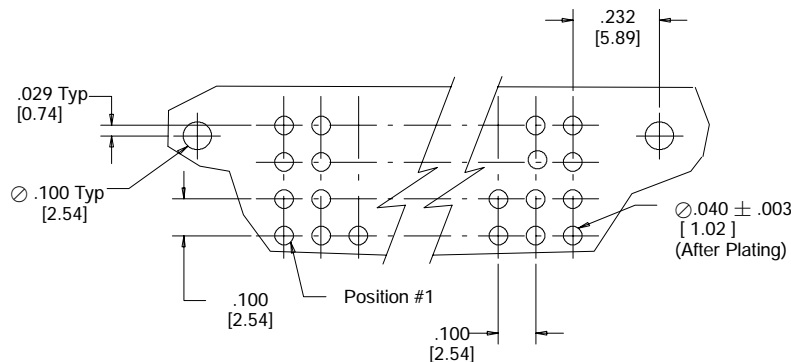

Recommended Hole Pattern


Tolerance Unless Noted			
	.0	.00	.000
Inch	± .1	± .01	± .005

[] Dimensions for Reference only

Note:

1. Notches A & C will accommodate 3M Polarizing Key 3518.

Ordering Information

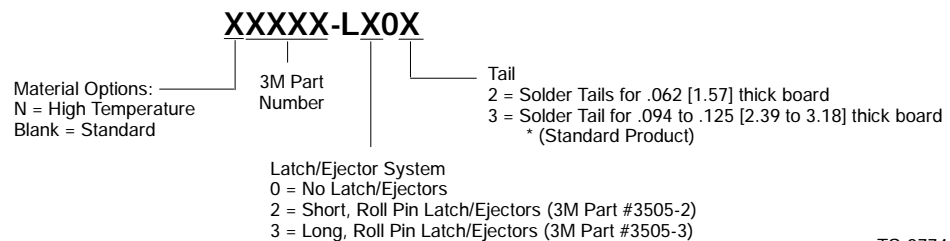

TS-0774-03
Sheet 3 of 3

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



Electronic and Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000
www.3M.com/eisd

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 1 year from the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**