

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [34690-9202](#)  
**Status:** **Active**  
**Overview:** Stac64™ Single, Multi-Pocket and Hybrid Header System  
**Description:** 2.54mm Pitch Stac64™ Vertical Header, 20 Circuits, Polarization C, Brown, Tube

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                 | <a href="#">Application Specification AS-34729-020 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">RoHS Certificate of Compliance (PDF)</a>         |
| <a href="#">Product Specification PS-34729-020 (PDF)</a> | <a href="#">Product Literature (PDF)</a>                     |

**General**


|                             |  |
|-----------------------------|--|
| Product Family              | PCB Headers  |
| Series                      | <a href="#">34690</a>  |
| Application                 | Power, Wire-to-Board   |
| Comments                    | Polarization C   |
| Overview                    | <u>Stac64™ Single, Multi-Pocket and Hybrid Header System</u> |
| Product Literature Order No | 987650-4561  |
| Product Name                | Stac64™  |
| UPC                         | 883906211639   |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 20                             |
| Circuits (maximum)             | 20                             |
| Color - Resin                  | Brown                          |
| Durability (mating cycles max) | 10                             |
| First Mate / Last Break        | No                             |
| Glow-Wire Compliant            | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass                          |
| Material - Plating Mating      | Tin                            |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 7.555/g                        |
| Number of Rows                 | 2                              |
| Orientation                    | Vertical                       |
| PC Tail Length                 | 3.33mm                         |
| PCB Locator                    | Yes                            |
| PCB Retention                  | None                           |
| PCB Thickness - Recommended    | 1.57mm                         |
| Packaging Type                 | Tube                           |
| Pitch - Mating Interface       | 2.54mm                         |
| Pitch - Termination Interface  | 2.54mm                         |
| Polarized to Mating Part       | Yes                            |
| Polarized to PCB               | Yes                            |
| Shrouded                       | Yes                            |
| Stackable                      | No                             |
| Surface Mount Compatible (SMC) | N/A                            |
| Temperature Range - Operating  | -40°C to +100°C                |
| Termination Interface: Style   | Through Hole                   |

**Electrical**

|                               |     |
|-------------------------------|-----|
| Current - Maximum per Contact | 10A |
|-------------------------------|-----|

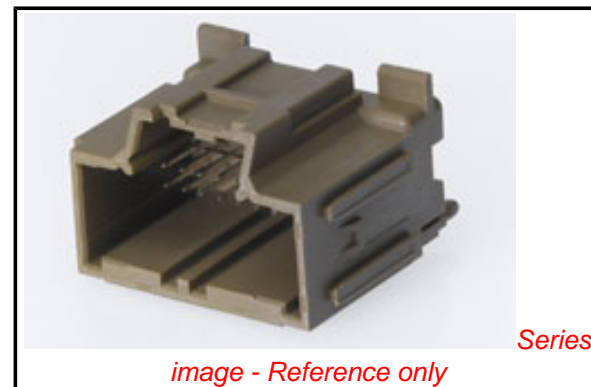

*image - Reference only*

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

**Contains SVHC: No**  
**Low-Halogen Status**  
**Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[34690Series](#)

**Mates With**

31408 USCAR 2.54mm (.100") Pitch Receptacle, 31372 5.25mm (.206") Pitch Hybrid Receptacle Assembly, 34729 2.54mm (.100") Pitch Stac64™ Right Angle Receptacle

Voltage - Maximum 500V

### **Solder Process Data**

Duration at Max. Process Temperature (seconds) 40  
Lead-free Process Capability SMC & Wave Capable (TH only)  
Max. Cycles at Max. Process Temperature 3  
Process Temperature max. C 260

### **Material Info**

### **Reference - Drawing Numbers**

Application Specification AS-34729-020  
Product Specification PS-34729-020  
Sales Drawing SD-34690-100

This document was generated on 06/26/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**