

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [34805-0111](#)
Status: **Active**
Description: CTX150 Female Terminal, Tin (Sn), 22 AWG D-Wind, Left Payoff, Grip Code S

Documents:

[Drawing \(PDF\)](#) [Application Specification AS-560065-001-FR \(PDF\)](#)
[Application Specification AS-34805-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Application Specification AS-560065-001 \(PDF\)](#)

General

Product Family	Crimp Terminals
Series	34805
Application	Power
Crimp Quality Equipment	Yes
Product Name	CTX150
UPC	884982651166

Physical

Durability (mating cycles max)	10
Gender	Female
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Nickel
Net Weight	0.224/g
Packaging Type	Reel
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	2.80mm
Wire Size AWG	22
Wire Size mm ²	0.35-0.50

Electrical

Current - Maximum per Contact	15A
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

Application Specification	AS-34805-001, AS-560065-001, AS-560065-001-FR
Sales Drawing	SD-34805-001

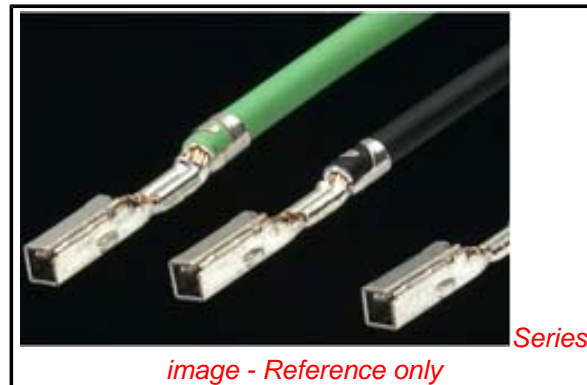


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Low-Halogen

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[34805Series](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
FineAdjust™ Applicator for CTX150 Receptacle Terminals, 0.30mm ² , 0.35mm ² , & 0.50mm ²	0639010400