

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [34840-3020](#)  
**Status:** **Active**  
**Overview:** MX150™ Sealed Connector System  
**Description:** MX150™ Sealed Male Connector, Bulkhead Twist-Lock, Dual Rows, 6 Circuits, Polarization B, Light Gray

**Documents:**

[3D Model](#) [Application Specification AS-34840-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-34840-0001 \(PDF\)](#)

**General**

Product Family	Crimp Housings
Series	<a href="#">34840</a>
Application	Power, Wire-to-Wire
Comments	No Connector Position Assurance (CPA)
More Detailed Tech Information	<a href="http://ewcap.uscarteams.org">http://ewcap.uscarteams.org</a>
Overview	<u>MX150™ Sealed Connector System</u>
Product Name	MX150™
UPC	887191166674

**Physical**

Circuits (maximum)	6
Circuits Detail	6
Color - Resin	LIGHT GRAY
Gender	Male
Glow-Wire Compliant	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	Modified Polystyrene Alloy
Net Weight	17.390/g
Number of Rows	2
Packaging Type	Bag
Panel Mount	Yes
Pitch - Mating Interface	3.50mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +125°C


**Electrical**

Current - Maximum per Contact	22A
-------------------------------	-----

**Material Info**

**Reference - Drawing Numbers**

Application Specification	AS-34840-001
Product Specification	PS-34840-0001
Sales Drawing	SD-34840-001

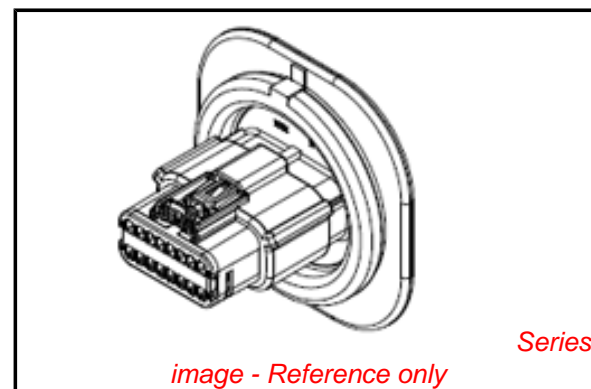

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[34840Series](#)

**Mates With**

[33472 MX150™ Sealed Connector](#)

**Use With**

[33000 MX150™ Male Terminal](#)