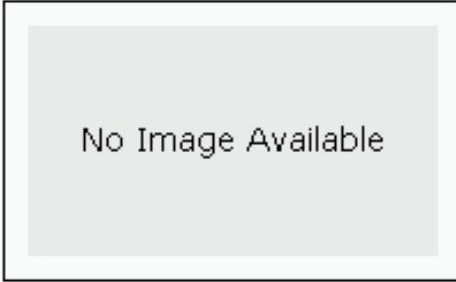



348466-5 Product Details

 [Live Product Chat](#)


348466-5

TE Part Number: 348466-5

 [Obsolete](#)
[Add to Part List](#)
[Contact Product Information Center](#)

DIP Sockets

[Not EU RoHS or ELV Compliant \(Find RoHS Compliant Alternates\)](#)

Product Highlights:

- DIP Socket
- Number of Positions = 8
- Row-to-Row Spacing = 7.62 mm
- Surface Mount
- Mount Style = Vertical

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)



Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = DIP Socket
- [Number of Positions](#) = 8
- Profile = Standard
- [Frame Style](#) = Open
- [Leg Style](#) = Bent Lead
- Color = Black
- Sleeve Material = Brass
- Product Series = Standard

Electrical Characteristics:

- Insulation Resistance (MΩ) = 10,000
- Contact Resistance (mΩ) = 10

Body Related Features:

- [Row-to-Row Spacing \(mm \[in\]\)](#) = 7.62 [0.300]
- [Mount Style](#) = Vertical
- [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]

Contact Related Features:

- [Contact Mount](#) = Surface Mount
- [Contact Material](#) = Beryllium Copper
- [Contact Mating Area Plating Material](#) = Tin
- [Contact Style](#) = Screw Machine
- [Mating Contact Type](#) = Inner Spring

Housing Related Features:

- Housing Material = Thermoplastic Polyester
- Housing Flammability Rating = UL 94V-0

Configuration Related Features:

- [Height Above PC Board \(mm \[in\]\)](#) = 2.80 [0.110]

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C

Conditions for Usage:

- Temperature Range (°C) = -55 - +125

Operation/Application:

- Application = Production

Packaging Related Features:

- [Packaging Method](#) = Loose Piece
- Packaging Quantity = 2,000

Other:

- Brand = AMP