

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [34949-0220](#)  
**Status:** **Active**  
**Overview:** MX150™ Sealed Connector System  
**Description:** MX150™ Backshell Receptacle Assembly, 2 Circuit without Rib

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Application Specification AS-34951-001 \(PDF\)](#)

**General**

|                                |   |
|--------------------------------|---|
| Product Family                 | Crimp Housings  |
| Series                         | <a href="#">34949</a>   |
| Application                    | Power, Wire-to-Wire   |
| Comments                       | Without Ribs  |
| More Detailed Tech Information | <a href="http://ewcap.uscarteams.org">http://ewcap.uscarteams.org</a> |
| Overview                       | <a href="#">MX150™ Sealed Connector System</a>                        |
| Product Name                   | MX150™  |
| UPC                            | 887191252476  |


**Physical**

|                               |                            |
|-------------------------------|----------------------------|
| Circuits (maximum)            | 6                          |
| Circuits Detail               | 6                          |
| Color - Resin                 | Black, Natural (White)     |
| Gender                        | N/A                        |
| Glow-Wire Compliant           | No                         |
| Lock to Mating Part           | Yes                        |
| Material - Resin              | Modified Polystyrene Alloy |
| Net Weight                    | 5.200/g                    |
| Number of Rows                | 0                          |
| Packaging Type                | Bag                        |
| Panel Mount                   | No                         |
| Pitch - Mating Interface      | N/A                        |
| Pitch - Termination Interface | N/A                        |
| Polarized to Mating Part      | Yes                        |
| Stackable                     | No                         |
| Temperature Range - Operating | -40°C to +125°C            |

**Material Info**

**Reference - Drawing Numbers**

|                           |                             |
|---------------------------|-----------------------------|
| Application Specification | AS-34951-001                |
| Sales Drawing             | SD-33471-021, SD-34949-0001 |

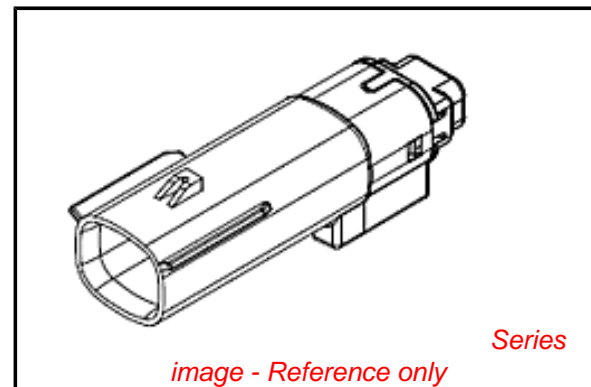

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[34949Series](#)

**Use With**

[33471-0206 MX150™ Sealed Connector](#)