



TE Connectivity is pleased to introduce this thick film high power device, sister to our popular 3522 series, suitable for auto placement in volume and for most applications. Supplied as standard on 7 inch Reels of 2000 pieces per reel.

—

Power Rating @ 70°C	2W
Resistance Range	1 - 10M
Resistance Tolerance	±1%, ±5%
Temperature Coefficient of Resistance (TCR)	°C
	°C
Max. Working Voltage	200V
Max. Overload Voltage	500V
Dielectric Withstanding Voltage	500V
Operating Temperature Range	-55°C ~ 155°C

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial line frequency and waveform corresponding to the power rating, as determined from the following formula :

Where the calculated RCWV is greater than the stated Max. Working Voltage, the Max. Working Voltage will apply.



---

Resistors shall have a power rating based on continuous load operation at an ambient temperature of 70 °C . For temperature in excess of 70 °C , The load shall derate as shown in chart below.




Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation break down	4.7 Clamped in the trough of a 90°C metallic v-block and shall be tested at ac potential respectively specified in the type for 60-70 seconds
Temperature Coefficient	°C °C	4.8 Natural resistance change per temp. degree centigrade. $\frac{R2-R1}{R1(t2-t1)} \times 106 \text{ (PPM/°C)}$ R1: Resistance value at room temperature (T1) R2: Resistance value at room temp. plus 100 °C(T2) Test pattern: room temp. (T1), room temp. +100°C(T2)
Short Time Overload	Resistance change rate is:	4.13 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds
Solderability	95 % coverage Min.	Wave Solder: Test temperature of solder:

Load life in humidity	Resistance change rate is:	7.9 Resistance change after 1,000 hours (1.5 hours "on", 0.5 hour "off" ) at RCWV in a humidity chamber controlled at 40°C ± 2°C and 90 to 95 % relative humidity
Load Life	Resistance change rate is:	4.25.1 Permanent resistance change after 1,000 hours operating at RCWV, with duty cycle of (1.5 hours "on", 0.5 hour "off") at 70°C ± 2°C ambient
Terminal bending	Resistance change rate is:	4.33 Twist of Test Board: Y/X = 3/90 mm for 60 seconds

**A. 4 digit marking for E-96 series:**


\*The first 3 digits are significant figures of resistance and the 4th digit denoted number of zeros.


Ex.  127K  
"R" is for decimal point.

Ex.  49.9

**B. 3 digit marking for E-24 series:**


\*The first 2 digits are significant figures of resistance and the 3rd digit denoted number of zeros

Ex.  120K  
"R" is for decimal point



Ex.  4.7

**PCB Plan (mm)**

4 layers PCB specification:  
 1) Outside 2 layers (Top and Bottom) with copper foil thickness at 2oz.  
 2) Inside 2 layers (Middle layers) with copper foil thickness at 4 oz.




Reflow solder profile

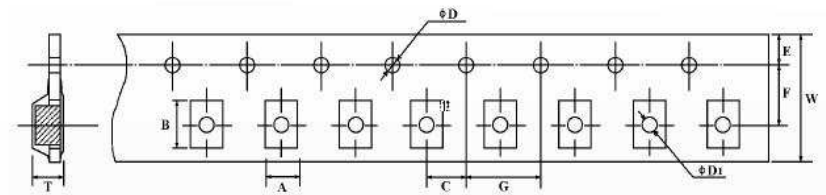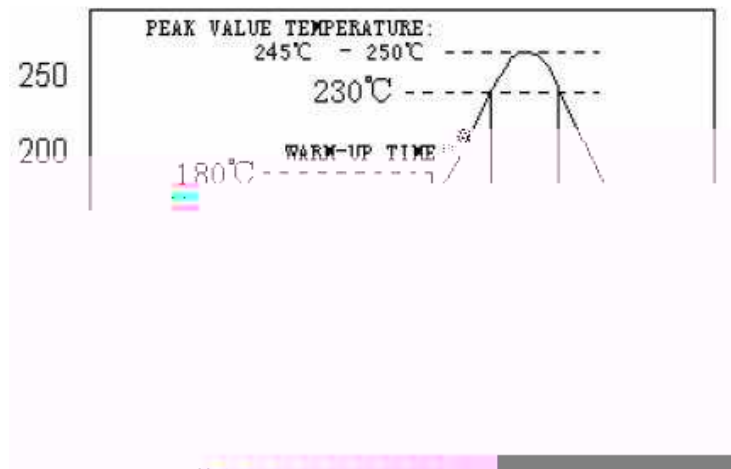

(mm)

A ±0.1	B ±0.1	C±0.15	ØD+0.1 -0	E±0.1	F±0.15	G ±0.1	W ±0.3	ØD1 ±0.1	T ± 0.1
2.65	5.25	2.0	1.5	1.75	5.5	4.0	12	1.0	1.35

Test Condition: 0.1 to 0.7 N at a peel-off speed of 300 mm / min.

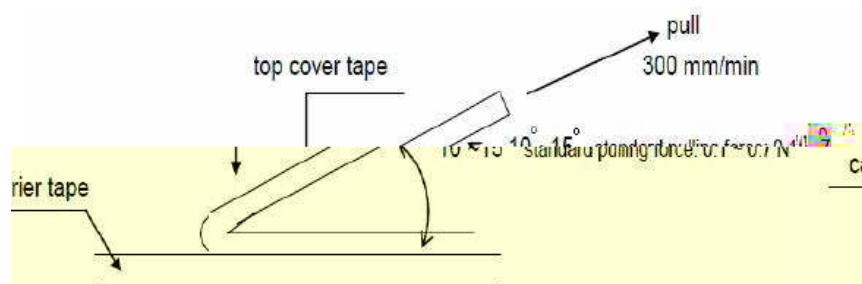

Qty Reel	A±0.5	B±0.5	C±0.5	D±1	M±2	W±1
2000	2.0	13.0	21.0	60.0	178	13.5

This product complies to EU RoHS directive, EU PAHs directive, EU PFOS directive and Halogen free.

The performance of these products, including the solderability, is guaranteed for a year from the date of arrival at your company, provided that they remain packed as they were when delivered and stored at a temperature of  $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$  and a relative humidity of  $60\%RH \pm 10\%RH$ , chemical and dust free atmosphere.

Even within the above guarantee periods, do not store these products in the following conditions:

1. In salty air or in air with a high concentration of corrosive gas, such as  $\text{Cl}_2$ ,  $\text{H}_2\text{S}$ ,  $\text{NH}_3$ ,  $\text{SO}_2$ , or  $\text{NO}_2$
2. In direct sunlight

