


Elastische Einpresszone / *compliant pressfit zone*
 Isolierwerkstoff / *housing material*: PBT GF30
 Bauart 7 / *type 7*
 Anforderungsstufe 1 = 500 Steckzyklen / *performance class 1 = 500 mating cycles*
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 10
diameter of drilled hole see drawing 164062 / No. 10
 1) $\phi 1.6^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
 $\phi 1.6^{+0.09}_{-0.06}$ Diameter of finished plated-through hole


Bestückungsplan / *contact layout*

■ bestückt / *assembled*

32 30 28 26 24 22 20 18 16 14 12 10 8 6 4 2

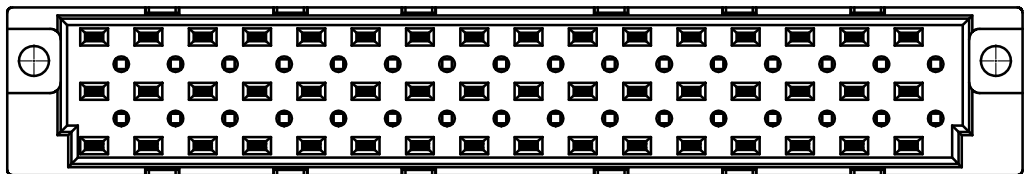

Leiterplatten-Lochbild Vorschlag / *PCB drillhole pattern proposal*

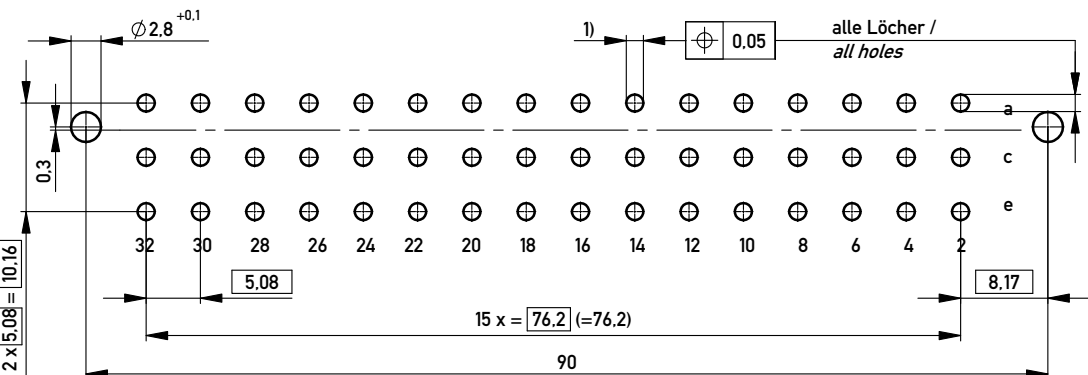

Information:	Tolerances	 All Dimensions in mm	Scale	2:1
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			
Subject to modification without prior notice. Drawing will not be updated.	Designation			
	Federleiste E 48 EE Fem. Connector E 48 Pressfit			
www.ERNI.com	354446			I
	Class			STVE
a	25.04.2013			
Index	Date			

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.