

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [35711-1110](#)
Status: **Active**
Description: 2.79mm Slip-On Receptacle Terminal, Quick Disconnect, 0.80mm Tab Thickness, Wire Range 20-22 AWG (0.52-0.33mm²), Post-Tin Plated

Documents:

[Drawing \(PDF\)](#) [Product Specification PS-35827-001 \(PDF\)](#)
[Product Specification PS-35702-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR95446
 UL E92853

General

Product Family Quick Disconnects
 Series [35711](#)
 Crimp Quality Equipment Yes
 Product Name Slip-On
 Type Quick Disconnect
 UPC 800753199521

Physical

Barrel Type Open
 Gender Female
 Glow-Wire Compliant No
 Insulation None
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Net Weight 0.241/g
 Orientation Straight
 Packaging Type Reel
 Plating min - Mating 1.016µm
 Plating min - Termination 1.016µm
 Polarized to Mating Part No
 Tab Thickness 0.81mm
 Tab Width 2.79mm
 Temperature Range - Operating -40°C to +120°C
 Termination Interface: Style Crimp or Compression
 Wire Insulation Diameter 1.50-2.00mm max.
 Wire Size AWG 20, 22
 Wire Size mm² 0.33 - 0.52


Electrical

Voltage - Maximum Per Wire Specification

Material Info

Reference - Drawing Numbers

Product Specification PS-35702-001, PS-35827-001
 Sales Drawing SD-35711-11*0

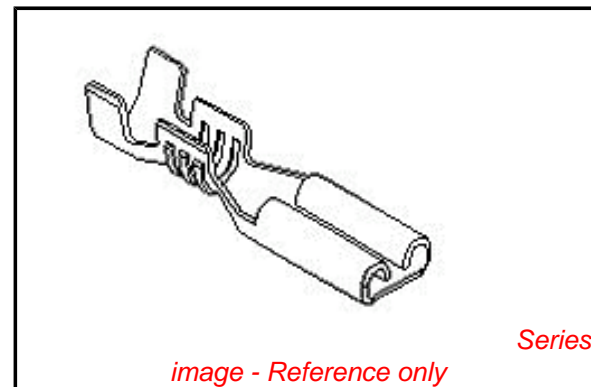

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
 35711Series