

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [35725-2410](#)
Status: **Active**
Description: Quick Disconnect, Female, for 14-18 AWG (2.00 - 0.80mm²) Wire, Metal Strip, Tab 6.35 x 0.81mm, Slip-On Type with Slot, Post Tin Plating

Documents:

[Drawing \(PDF\)](#) [Packaging Specification PK-35725-015 \(PDF\)](#)
[Product Specification PS-35703-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Packaging Specification PK-35725-012 \(PDF\)](#)

Agency Certification

CSA LR95446
 UL E92853

General

Product Family Quick Disconnects
 Series [35725](#)
 Crimp Quality Equipment Yes
 Product Name N/A
 Type Quick Disconnect
 UPC 800753514645

Physical

Barrel Type Open
 Gender Female
 Glow-Wire Compliant No
 Insulation None
 Lock to Mating Part Yes
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Net Weight 0.840g
 Orientation Straight
 Packaging Type Reel
 Plating min - Mating 1.016µm
 Plating min - Termination 1.016µm
 Polarized to Mating Part No
 Tab Thickness 0.81mm
 Tab Width 6.35mm
 Temperature Range - Operating -40°C to +120°C
 Termination Interface: Style Crimp or Compression
 Wire Insulation Diameter 3.81mm max.
 Wire Size AWG 14, 16, 18
 Wire Size mm² 0.80 - 2.00


Electrical

Voltage - Maximum 300V

Material Info

Reference - Drawing Numbers

Packaging Specification PK-35725-012, PK-35725-015
 Product Specification PS-35703-001
 Sales Drawing SD-35725-002

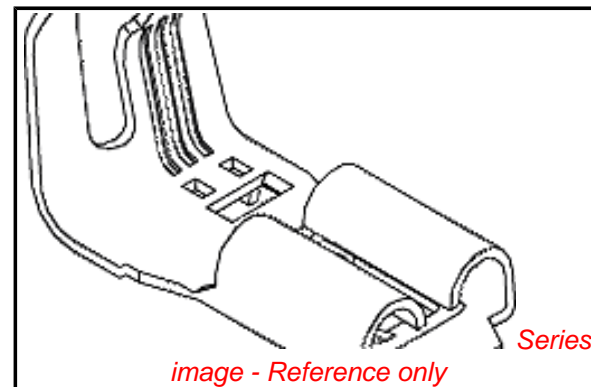

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[35725Series](#)

Use With

6.35mm Tab

This document was generated on 02/01/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION