



Bestückungsplan / contact layout

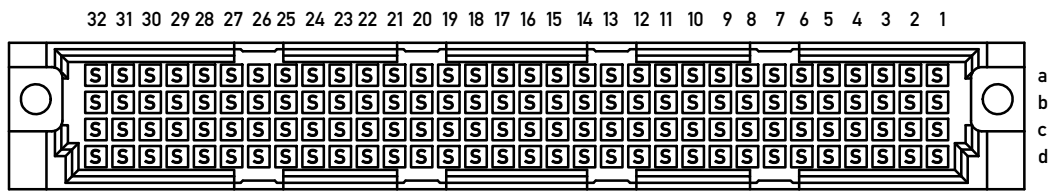

Elastische Einpresszone / compliant pressfit zone
Isolierwerkstoff / housing material : PBT GF 30
Bauart 4 / type 4
Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
diameter of drilled hole see drawing 114124
1) $\varnothing 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
 $\varnothing 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Bedruckung siehe Zeichnung 294905
Marking see drawing 294905

Leiterplatten-Lochbild / PCB drillhole pattern

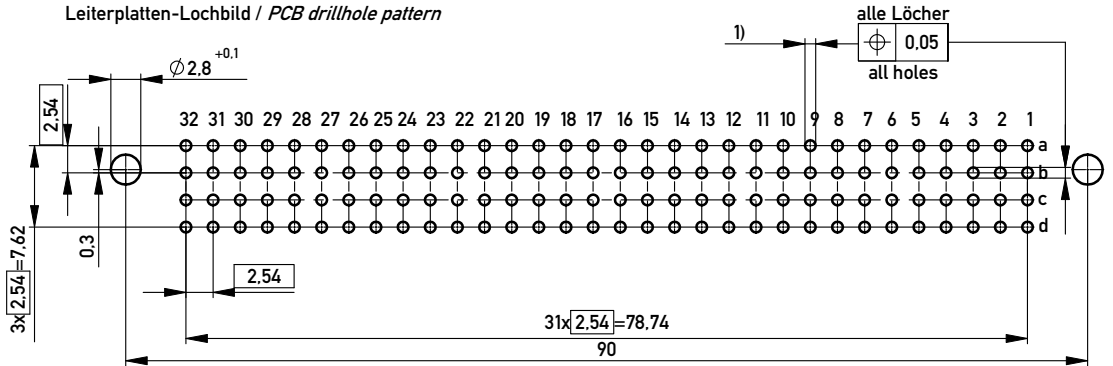

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16106 to be observed.

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm		Designation	
Subject to modification without prior notice. Drawing will not be updated.				Messerleiste RD 128 EE Male Connector RD 128 EE	
-		www.ERNI.com		374466	
Index	02.06.2009	Date		Class	
				STVRD	
				I A3	