

HiTemp ETX Series Thermoelectric Cooler



The ETX2-12-F2-3030-TA-RT-W6 high temperature, high-performance Thermoelectric Cooler uses Laird's enhanced Thermoelectric Module construction preventing performance degrading copper diffusion, which is common in standard grade Thermoelectric Coolers operating in high temperature environments exceeding 80 °C. It has a maximum Qc of 22.6 Watts when $\Delta T = 0$ and a maximum ΔT of 83.2 °C at Qc = 0.

Features

- High-temperature operation
- Reliable solid-state
- No sound or vibration
- Environmentally-friendly
- RoHS-compliant

Applications

- Peltier Cooling for Refrigerated Centrifuges
- Peltier Cooling for Machine Vision
- Thermoelectric Cooling for CMOS Sensors
- Cooling Solutions for Autonomous Systems
- Peltier Cooling for Digital
- Light Processors

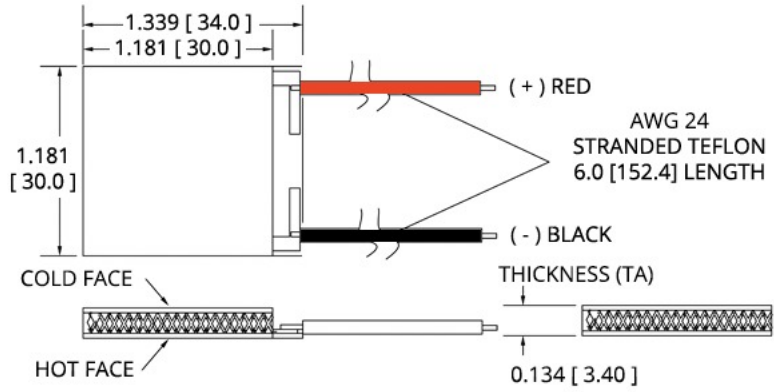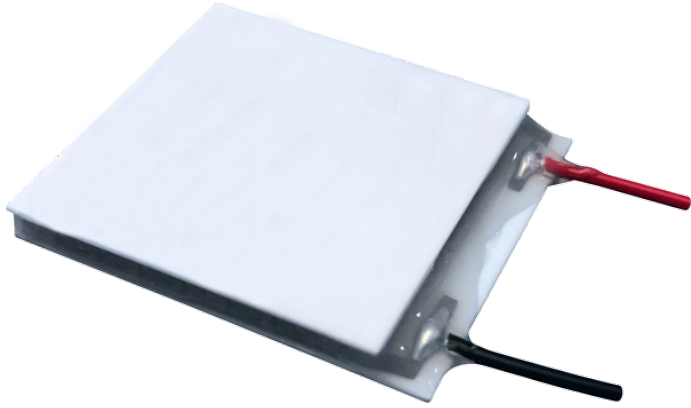


Ceramic Material: Alumina (Al₂O₃)
 Solder Construction: 232°C, SbSn

INCHES [MM]


Note: Allow 0.020 in [0.5 mm] around perimeter of the thermoelectric cooler and lead wire attachment to accommodate sealant

ELECTRICAL AND THERMAL PERFORMANCE


Heat Pumped at Cold Side
 Thot = 85 °C

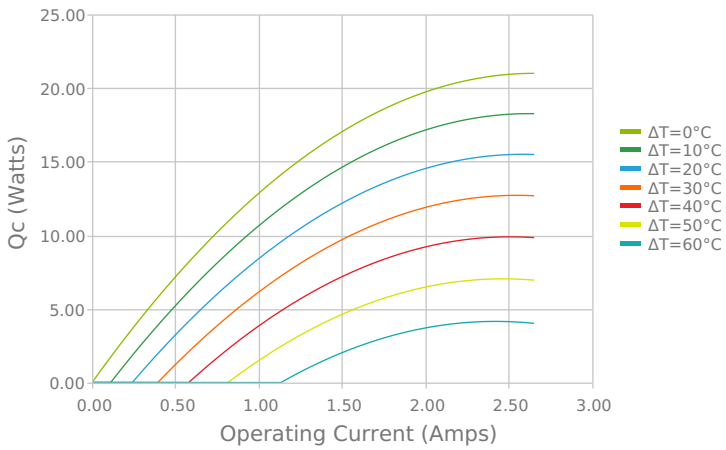


Heat Pumped at Cold Side
 Thot = 85 °C

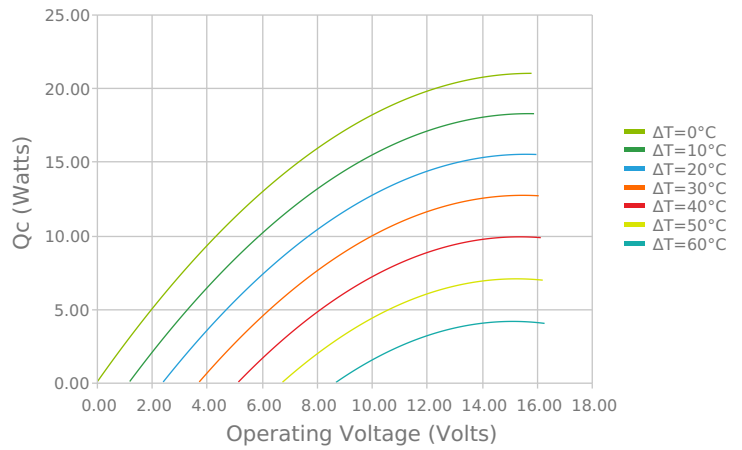


Current vs Voltage (I vs V)
 Thot = 85 °C

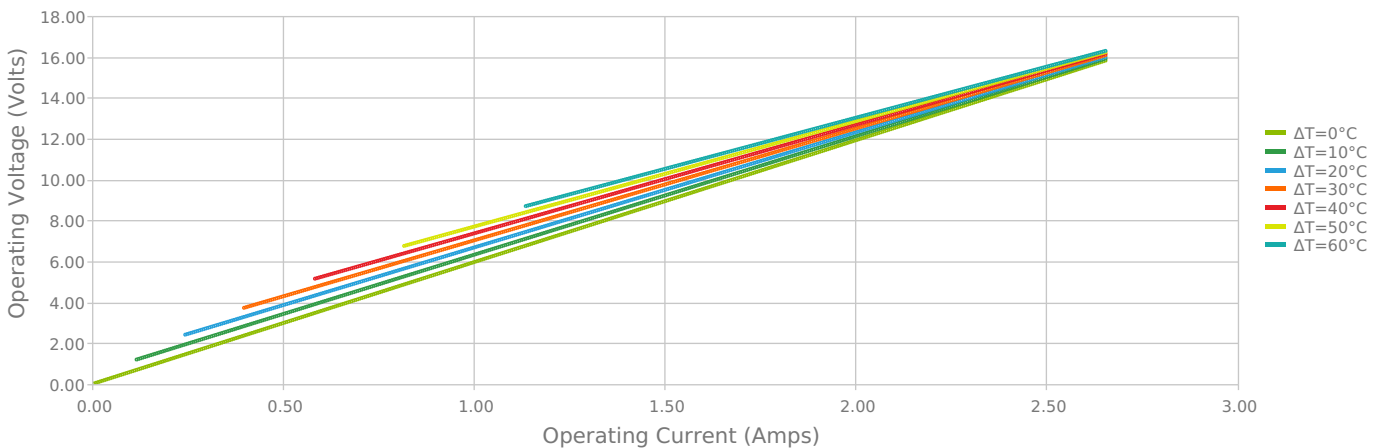


Coefficient of Performance (COP = Qc/Pin)
 Thot = 85 °C

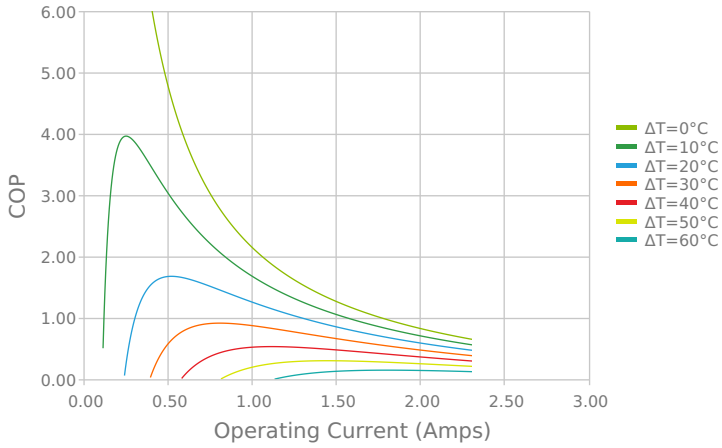


Coefficient of Performance (COP = Qc/Pin)
 Thot = 85 °C

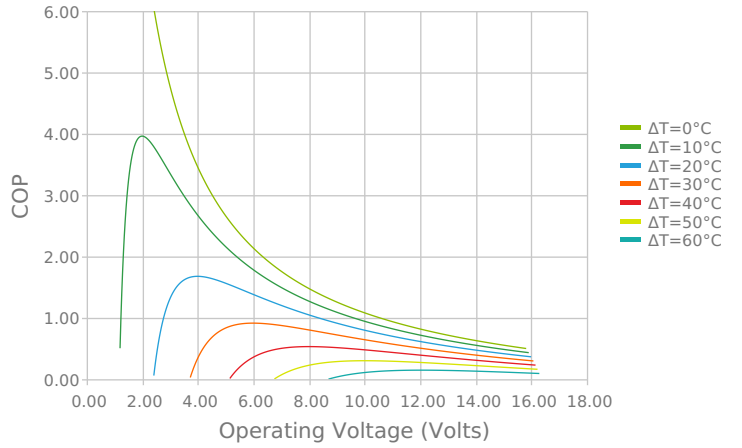


Total Heat Dissipated at Hot Side (Qh=Qc+Pin)
 Thot = 85 °C

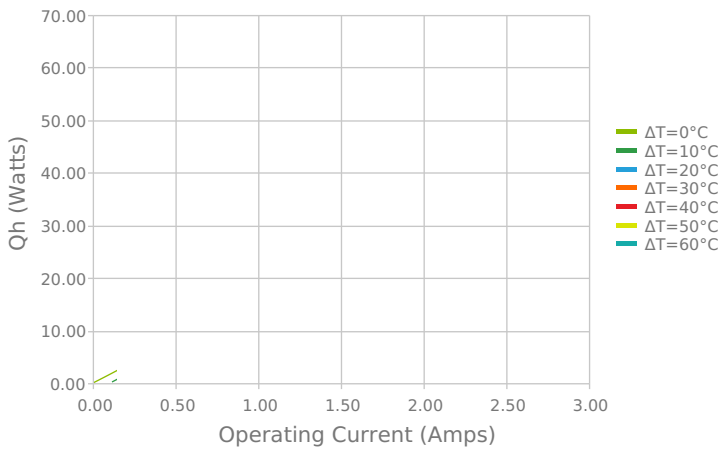


Total Heat Dissipated at Hot Side (Qh=Qc+Pin)
 Thot = 85 °C

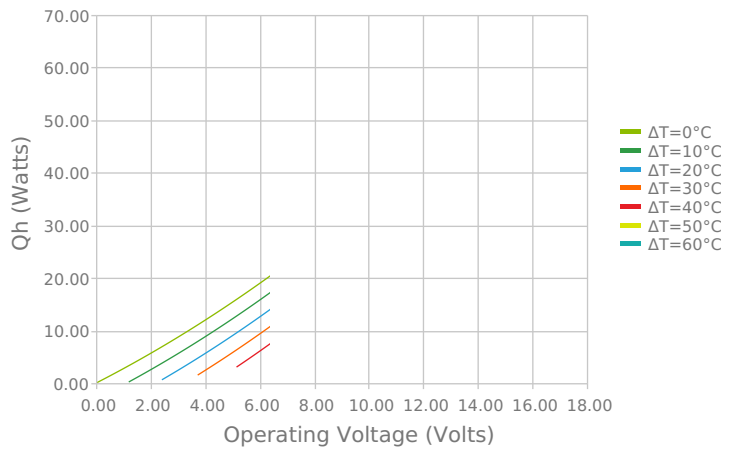

Heat Pumped at Cold Side (Qc)
 Thot = 85 °C | Current = 2.0 Amps

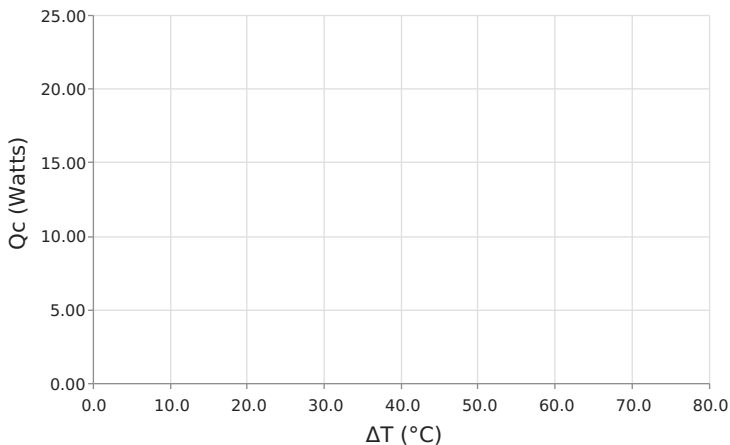

Coefficient of Performance (COP = Qc/Pin)
 Thot = 85 °C | Current = 2.0 Amps

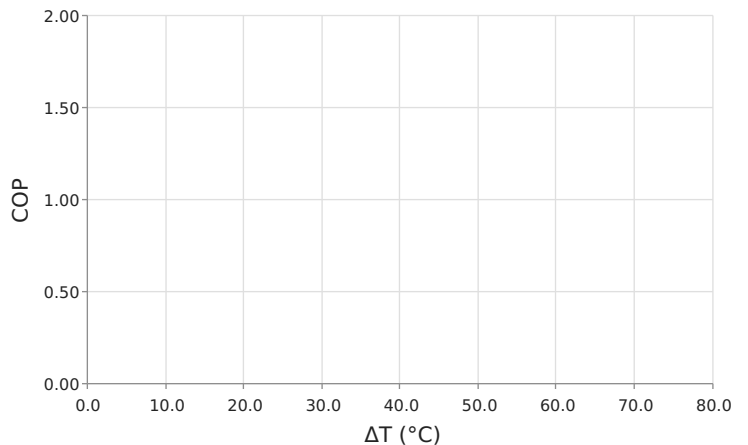

SPECIFICATIONS*

| Hot Side Temperature | 50.0 °C | 85.0 °C | 110.0 °C |
|-----------------------------------------------------------|-------------|------------|------------|
| Qcmax ($\Delta T = 0$) | 22.6 Watts | 24.4 Watts | 25.2 Watts |
| ΔT_{max} ($Q_c = 0$) | 83.2°C | 95.3°C | 102.0°C |
| I_{max} (I @ ΔT_{max}) | 2.3 Amps | 2.2 Amps | 2.2 Amps |
| V_{max} (V @ ΔT_{max}) | 16.6 Volts | 19.1 Volts | 20.8 Volts |
| Module Resistance | 6.71 Ohms | 7.82 Ohms | 8.56 Ohms |
| Max Operating Temperature | 150 °C | | |
| Weight | 9.0 gram(s) | | |

* Specifications reflect thermoelectric coefficients updated March 2020

FINISHING OPTIONS

| Suffix | Thickness | Flatness / Parallelism | Hot Face | Cold Face | Lead Length |
|--------|--------------------------------------|--------------------------------------------|----------|-----------|---------------------|
| TA | 3.581 ± 0.254 mm 0.141 ± 0.010 in | 0.025 mm / 0.025 mm 0.001 in / 0.001 in | Lapped | Lapped | 152.4 mm 6.00 in |

SEALING OPTIONS

| Suffix | Sealant | Color | Temp Range | Description |
|--------|---------|----------------------|--------------|----------------------------------|
| RT | RTV | Translucent or White | -60 to 204°C | Non-corrosive, silicone adhesive |

NOTES

1. Max operating temperature: 150°C
2. Do not exceed I_{max} or V_{max} when operating module
3. Reference assembly guidelines for recommended installation

Any information furnished by Laird and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Laird. All specifications are subject to change without notice. Laird assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Laird products are sold subject to the Laird Terms and Conditions of sale (including Laird's limited warranty) in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2020 Laird Thermal Systems GmbH. All Rights Reserved. Laird, Laird Technologies, Laird Thermal Systems, the Laird Logo, and other word marks and logos are trademarks or registered trademarks of Laird Limited or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

Date: 07/30/2020