
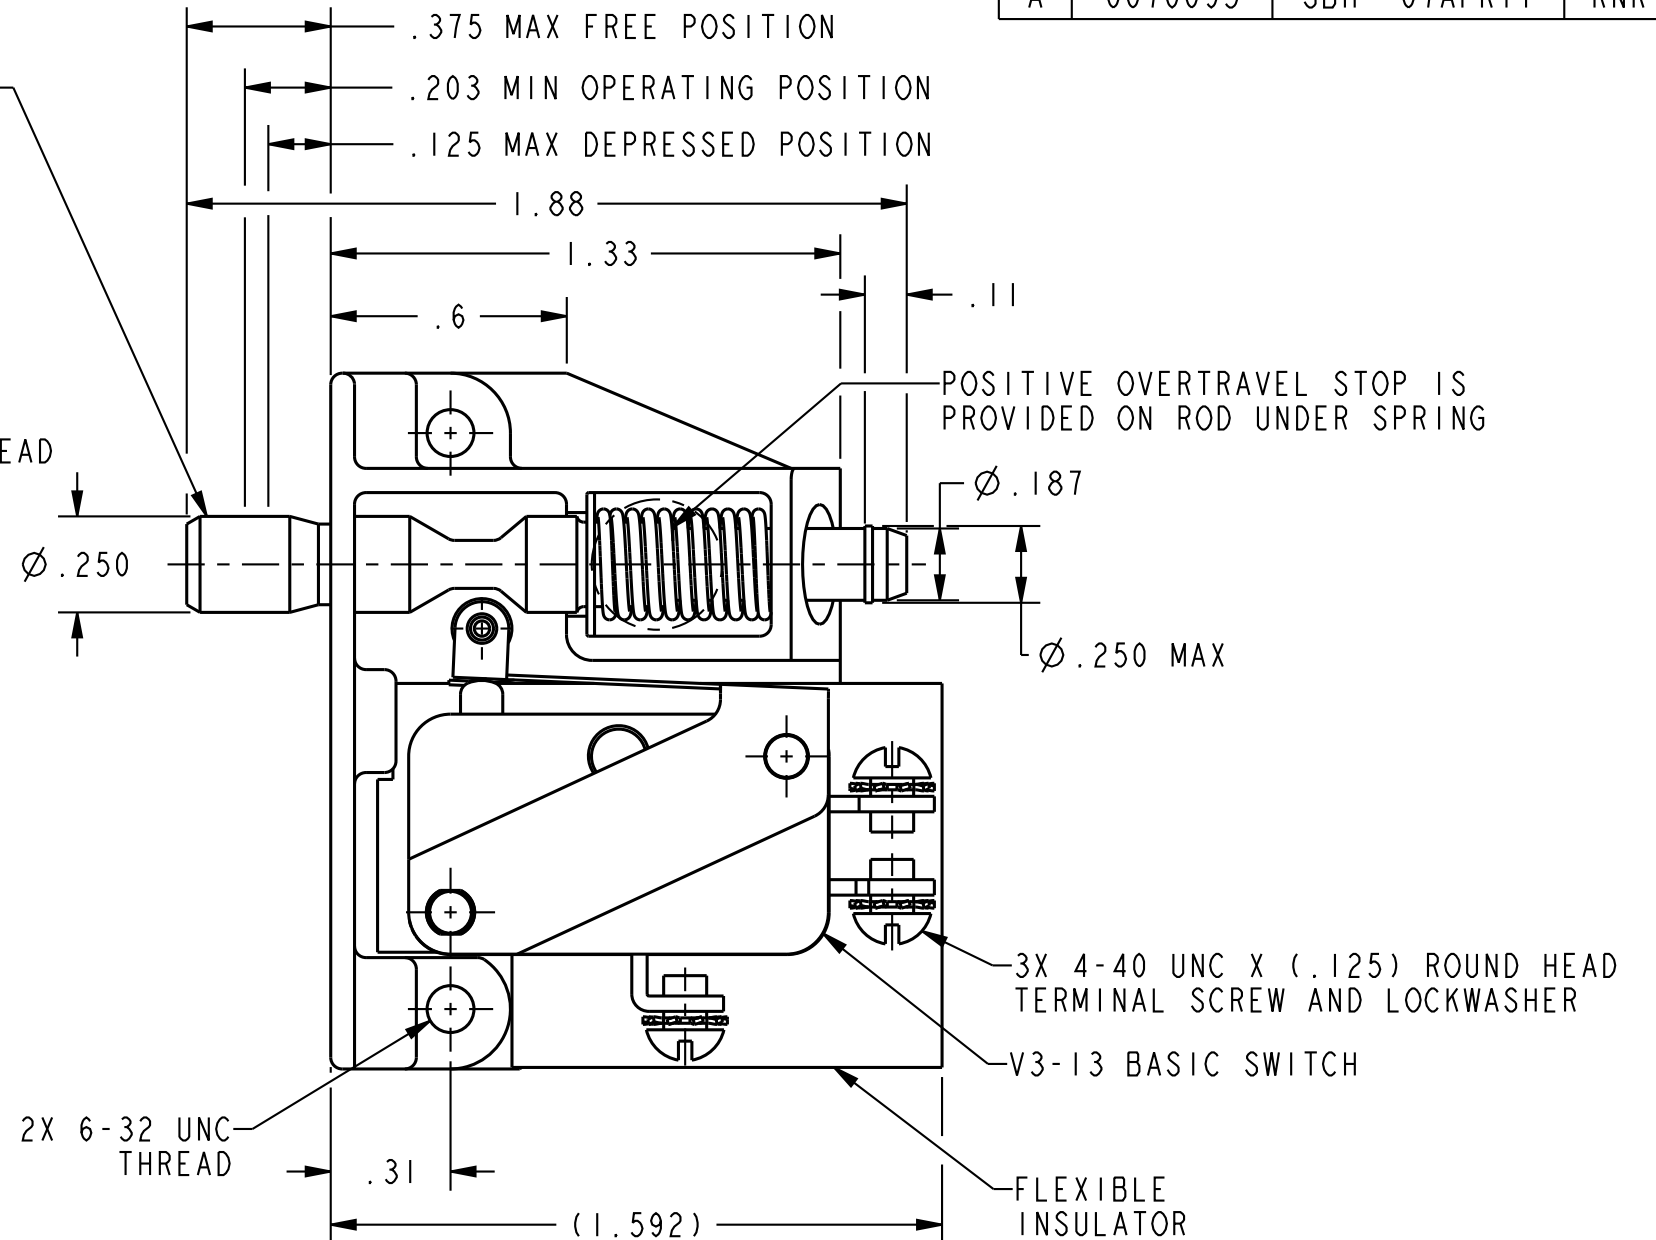


HONEYWELL PART NUMBER
3AC120
PRODUCT CODE
KCC1200

REV	DOCUMENT	CHANGED BY	CHECK
A	0076095	SBH 07APR11	KNR

PUSH TO OPERATE-RETURNS AUTOMATICALLY TO POSITION SHOWN
 PULL TO OPERATE-REMAINS IN OPERATED POSITION UNTIL RESET FOR AUTOMATIC RETURN BY NEXT FULL STROKE "PUSH" OPERATION

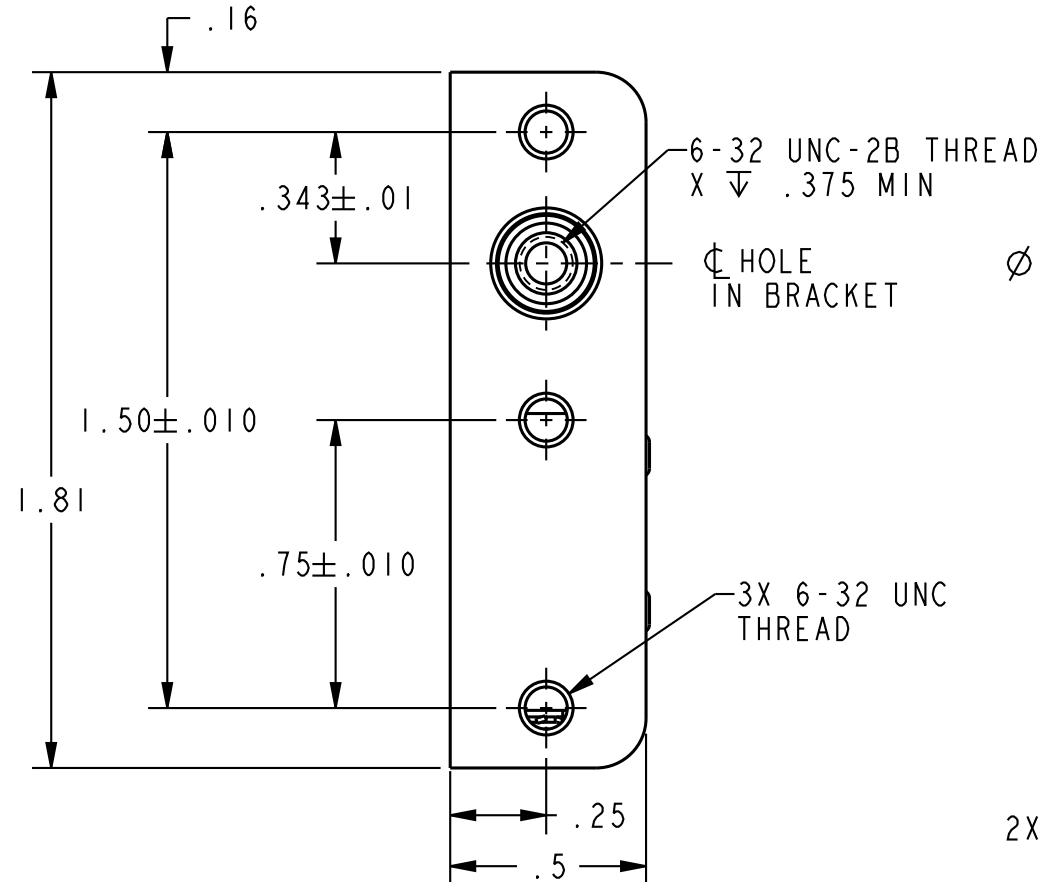

- NOTES:
 1 - NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET
 2 - PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS
 3 - WITH ROD IN EITHER ACTUATED POSITION, BASIC SWITCH PLUNGER MUST HAVE .010 MIN OVERTRAVEL AND WITH ROD IN FREE POSITION BASIC SWITCH PLUNGER MUST HAVE .005 MIN RELEASE TRAVEL

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN SBH 07APR11	Honeywell						
	CONTACT ARRANGEMENT S P D T	NO PLACES x ± ONE PLACE .x ± TWO PLACE .xx ± THREE PLACE .xxx ± ANGLES x ±	CHECK KNR 07APR11						TITLE ASSEMBLY - SWITCH	
TOTAL TRAVEL .250 APPROX PUSH DIRECTION .187 APPROX PUSH DIRECTION	15.1A 1/2HP 125 OR 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"	THIRD ANGLE PROJECTION 	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			SIZE	TYPE	CAGE CODE		
FULLY DEPRESSED FORCE ---- 4 LB MAX			INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			B	I	-	3AC120	A
			Pro/ENGINEER 3D			SCALE	2:1	WEIGHT- .092 LB	SHEET	1 OF 1