


PX0840/A3/3M00 Datasheet

Product Name // Overmoulded USB 3.0 Cable PX0840
Series USB Standard A Plug to Sealed A Plug 3m Cable

 [View Product Page](#)

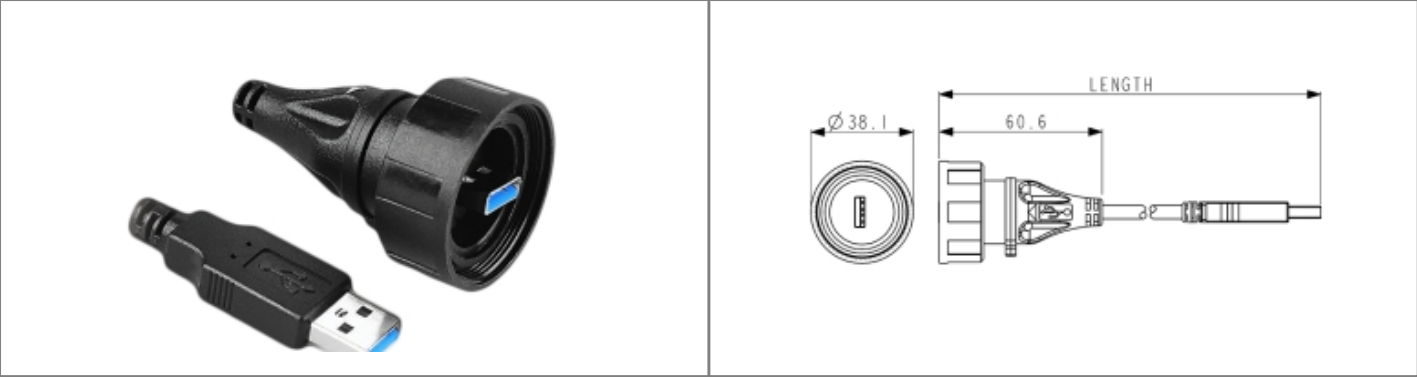

// Product Description:	
 Pre-Wired Overmoulded USB 3.0 Cable	 3m Cable Length
 Water and dustproof to IP68 when mated with compatible connector	 PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
 Standard USB 3.0 Type A plug to Sealed Standard USB 3.0 Type A plug	 Mate with PX08 Standard USB 3.0 Series Panel Mount Connectors

// General Information:	
Product Display Title:	Pre-Wired Overmoulded USB 3.0 Cable
Product Family:	Circular Data Connectors
Product Series:	Standard Buccaneer - USB
Body Colour:	Black
Body Material:	PVC
Cable Length:	3m
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	1A
Data Cable Type:	USB 3.0 Standard A Plug to Sealed A Plug
Diameter Over Coupling Ring Mm:	38.1mm
Flamability Rating:	UL94V-0
Function:	Flex to Standard Connector Double Ended Cable
Ip Rating:	IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	0°C
Number Of Contacts:	9 Contacts
Rohs Compliant:	Yes
Voltage Max:	5V

// Product PDF Links

 Standard Series USB connectors...

// Product 3D CAD Model Links

 PX0840/A3/3M003D CAD Model