


AS-i add-on module Connection control circuit: screw terminal

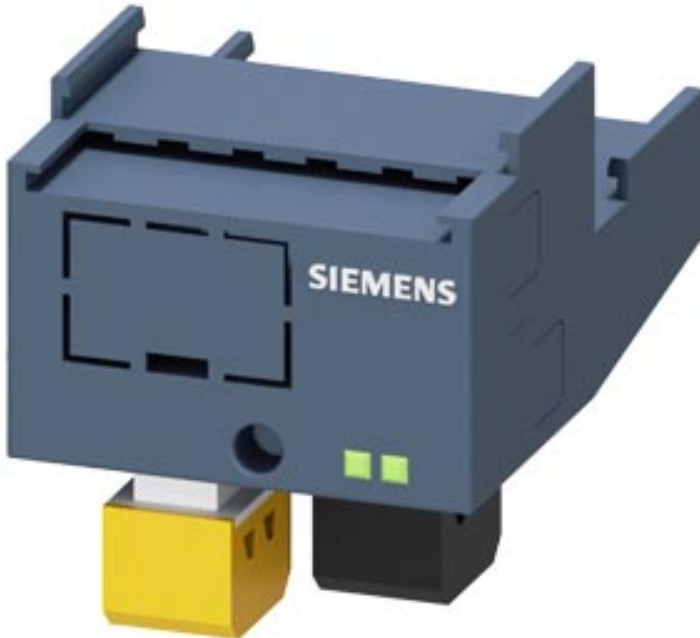

General technical data		
Product brand name		SIRIUS
Product designation		AS-i mounting module
Protection class IP		IP20
Relative humidity during operation	%	10 ... 90
Ambient temperature		
• during transport	°C	-25 ... +70
• during storage	°C	-25 ... +80
• during operation	°C	-20 ... +60
Reference code acc. to DIN EN 61346-2		K
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Installation/ mounting/ dimensions		
Width	mm	45
Height	mm	50
Depth	mm	62
Connections/ Terminals		
Type of electrical connection		

- for auxiliary and control current circuit

		screw-type terminals
Tightening torque for auxiliary contacts with screw-type terminals	N·m	0.5 ... 0.6

Certificates/ approvals

Certificate of suitability

IEC / EN 60947-6-2

General Product Approval

EMC

Declaration of Conformity



CSA



UL



RCM



EG-Konf.

[Miscellaneous](#)

Shipping Approval

other



ABS



BUREAU
VERITAS



LRS



PRS



RMRS



ASi

other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RA6970-3A>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RA6970-3A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RA6970-3A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RA6970-3A&lang=en

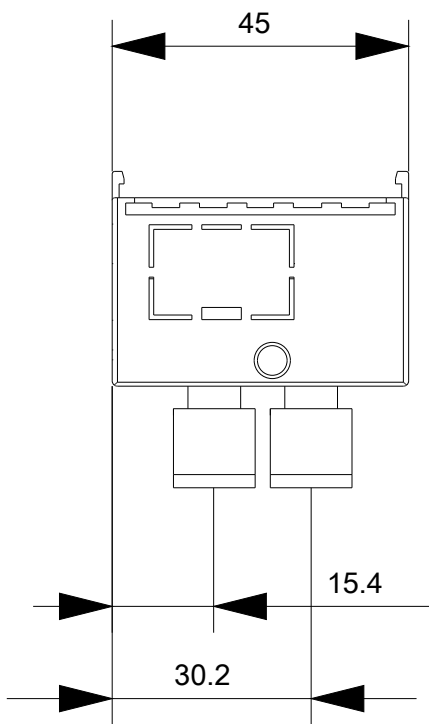

last modified:

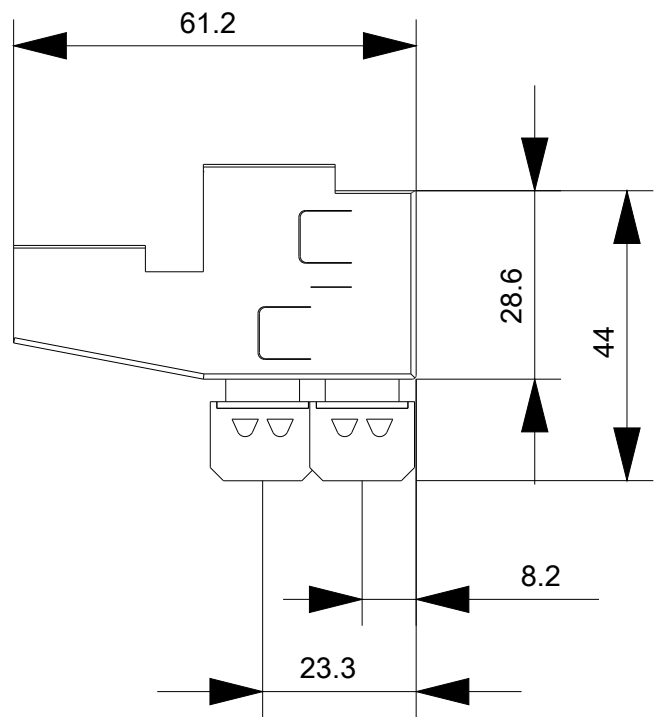

03/23/2020