

HMI module High-Feature



product brand name	SIRIUS
product category	HMI modules
product designation	HMI module
design of the product	High-Feature
manufacturer's article number	
• of soft starter	3RW50
• of soft starter	3RW51
• of soft starter	3RW52
• of soft starter	3RW55








General technical data	
protection class IP	IP20; IP64 with accessory door mounting kit
degree of protection NEMA rating	NEMA 4 with accessory door mounting kit

Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	snap-on mounting
height	68 mm
width	111 mm
depth	32.15 mm

Ambient conditions

ambient temperature	
<ul style="list-style-type: none"> during operation 	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above
<ul style="list-style-type: none"> during storage and transport 	-40 ... +80 °C
environmental category	
<ul style="list-style-type: none"> during operation acc. to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul style="list-style-type: none"> during storage acc. to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul style="list-style-type: none"> during transport acc. to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. height of fall 0.8 m)

Certificates/ approvals

General Product Approval	Declaration of Conformity	Test Certificates	Marine / Shipping
 CCC	 EAC	 EG-Konf.	 ABS
	Miscellaneous	Type Test Certificates/Test Report	
Marine / Shipping	other		
 LRS	 PRS	 DNV-GL DNVGL.COM/AF	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5980-0HF00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5980-0HF00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5980-0HF00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5980-0HF00&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5980-0HF00/char>

Characteristic: Installation altitude


<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5980-0HF00&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

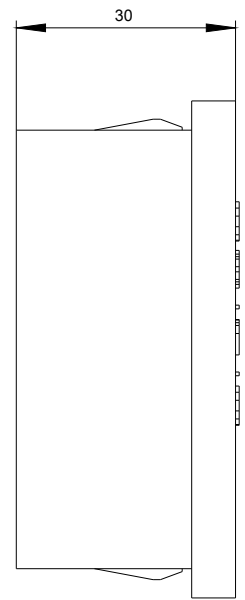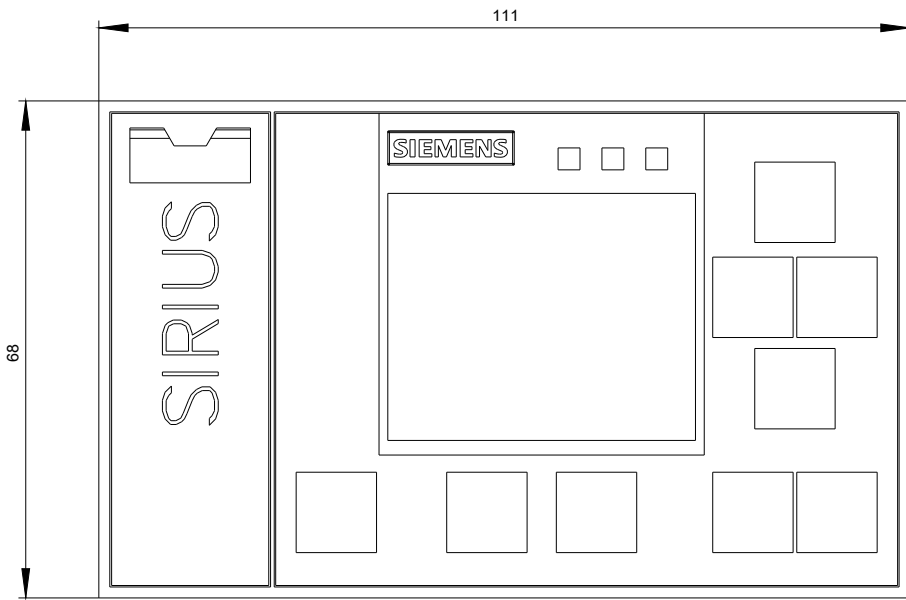

A

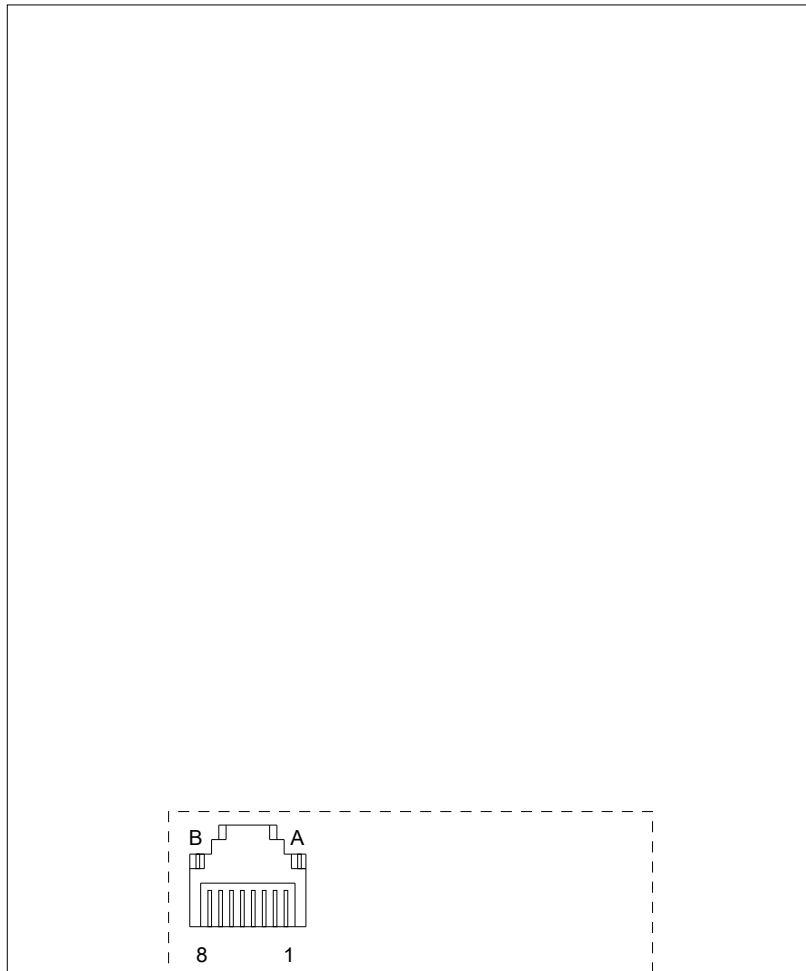

-X50:LAN

last modified:

11/27/2020