

wire connector with control wire voltage tap-off 3 units accessory for:
3VA4/5 125



Model	
Product brand name	SENTRON
Product designation	accessories
Connections according IEC	
IEC-marking / of terminals	1.5-95 CU 4.0-95 AL NNL
Connectable conductor cross-section	• for copper cable / stranded / minimum 10 mm² • for copper cable / stranded / maximum 95 mm² • for aluminum cable / solid / minimum 10 mm² • for aluminum cable / solid / maximum 16 mm² • for aluminum cable / stranded / minimum 10 mm² • for aluminum cable / stranded / maximum 95 mm²
Wire stripping length	12,2 mm
Connections according UL	

UL-marking / of terminals	TA1.1 CMC 14-3/0 CU7 12-3/0 AL7 UR CSA
Permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
Connectable conductor cross-section • for copper cable / stranded / maximum • for copper cable / finely stranded / maximum • for aluminum cable / stranded / minimum • for aluminum cable / stranded / maximum	3/0 AWG 3/0 AWG 12 AWG 3/0 AWG

Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval
 Miscellaneous		 EG-Konf.	 LRS

other

[Manufacturer Declaration](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9133-0JG11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9133-0JG11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9133-0JG11

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

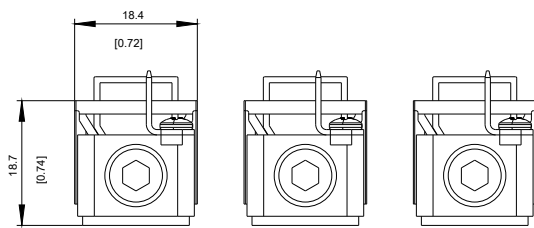

last modified:

11/19/2019