

SPECIFICATIONS

Mechanical

Plug Mating Force: 4.50kgf (9.92Lb) max
Plug Unmating Force: 1.00~4.00kgf (2.21~8.82Lb)
Durability: 10000 Cycles

Electrical


Current Rating: 0.50A min
Contact Resistance: 30mΩ max. (Initial)
 60mΩ max. (After life test)
Dielectric Withstanding Voltage: 500V AC RMS
Insulation Resistance: Unmated plug: 100MΩ min at 500V DC
 Mated plug: 10MΩ min at 500V DC

Physical





Housing: Thermoplastic, UL 94V-0 rated
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -40°C to +85°C

Displayport Connector

3V Series
Displayport, Upright,
T/H Type, 20 Pos



DRAWING

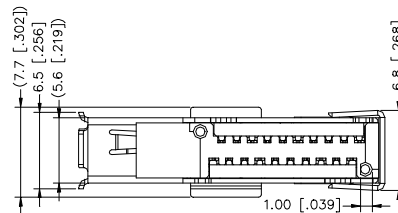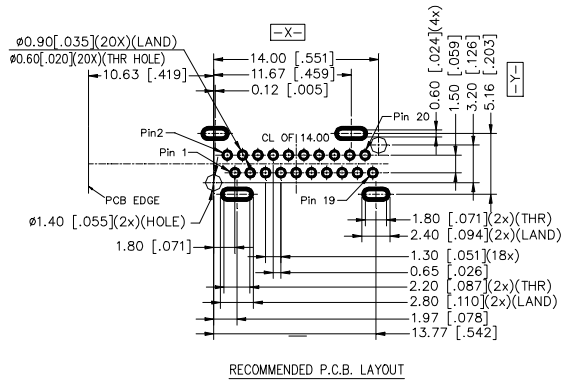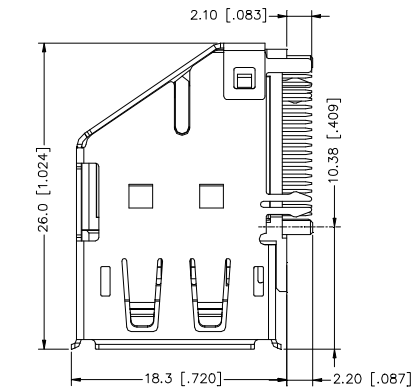

ORDERING INFORMATION

PRODUCT NO.: 3VD2120*-H7U0-4H

Display port series	3	Lead code	H=Halogen-free
Product series	V	Package code	4=Soft tray
Standard type	D	Extension code	
Termination type	2=Upright T/H	Contact Area Plating	
Connector type	1=Receptacle	3=30μ Gold	
No. of Pos.	20=20 POS	7=15μ Gold	
		1=1-3μ Gold Flash	