

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0416610551](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: KK 396 Breakaway Header, Vertical, 12 Circuits, 0.38µm Gold (Au) Selective Plating, Pin length 19.05mm

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

Application tooling part link


Application Tooling Part Link 11-20-0901

General

Product Family PCB Headers
 Series 41661
 Application Board-to-Board, Signal, Wire-to-Board
 Overview [KK® Interconnect System - Molex](#)
 Product Name KK 396
 UPC 822350072526

Physical

Breakaway Yes
 Circuits (Loaded) 12
 Circuits (maximum) 12
 Color - Resin Black
 Durability (mating cycles max) 25
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Capable No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Gold
 Material - Plating Termination Gold
 Material - Resin Polyester
 Net Weight 3.362/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 2.87mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 3.96mm
 Pitch - Termination Interface 3.96mm
 Polarized to Mating Part No
 Polarized to PCB No
 Shrouded No
 Stackable Yes
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating See Product Specification

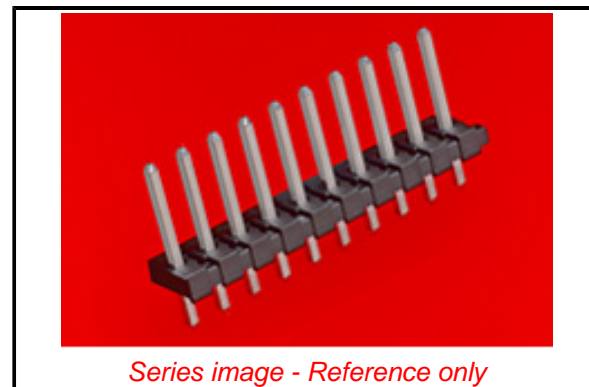

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 D(2020)4578-DC (25
 June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[41661](#) Series

Mates With

[2139](#) KK Crimp Housing, [41695](#) KK Crimp Housing, [6442](#) KK Crimp Housing, [2145](#) PCB Connector, [41815](#) PCB Connector, [3069](#) KK Crimp Housing

Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 4.5A

Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005

Lead-freeProcess Capability WAVE

Max. Cycles at Max. Process Temperature 001

Process Temperature max. C 235

Material Info

Engineering Number A-41661-B12B208

This document was generated on 10/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION