

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0428192242](#)  
**Status:** **Active**  
**Overview:** [Mini-Fit Sr. Power Connectors](#)  
**Description:** 10.00mm Pitch Mini-Fit Sr. Header, Single Row, Vertical, 6.35mm PCB Thickness, Tin (Sn) Plating, 2 Circuits, USE NYE LUBE ON MATING SURFACES  
**Replacement Part Number :** <http://www.molex.com/molex/search/partSearch?pQuery=&sType=p&query=0428192243428192243> (Gold)

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179


**General**

Product Family PCB Headers  
 Series [42819](#)  
 Application Power, Wire-to-Board  
 Comments WHEN USING OVERALL TIN PLATED TERMINALS: FOR APPLICATIONS INVOLVING VIBRATION AND/OR THERMAL CYCLING, MOLEX STRONGLY RECOMMENDS THE USE OF NYE LUBRICANT (NYOGEL 7600) ON THE MATING SURFACES OF THE TERMINAL. .

Overview [Mini-Fit Sr. Power Connectors](#)  
 Product Name Mini-Fit Sr.  
 Replacement Part Number [428192243](#) (Gold)  
 Replacement Part Number [428192244](#) (Silver)  
 UPC 800754879866

**Physical**

Breakaway No  
 Circuits (Loaded) 2  
 Circuits (maximum) 2  
 Color - Resin Black  
 Durability (mating cycles max) 30  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Capable No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part Yes  
 Material - Metal Brass  
 Material - Plating Mating Tin  
 Material - Plating Termination Tin  
 Material - Resin High Temperature Thermoplastic  
 Net Weight 5.837/g  
 Number of Rows 1  
 Orientation Vertical  
 PC Tail Length 8.30mm  
 PCB Locator Yes  
 PCB Retention Yes  
 PCB Thickness - Recommended 6.35mm  
 Packaging Type Tray  
 Pitch - Mating Interface 10.00mm  
 Pitch - Termination Interface 10.00mm

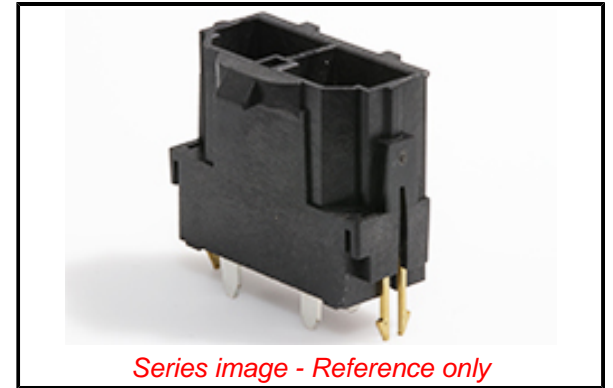

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - D(2020)4578-DC (25 June 2020)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[42819](#) Series

**Mates With**

[Mini-Fit Sr. Receptacle Housing with TPA 42816](#)

Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	50.0A
Voltage - Maximum	600V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	030
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	235

**Material Info**

This document was generated on 09/11/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**