

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0436500320**  
**Status:** **Active**  
**Overview:** Micro-Fit Connector System  
**Description:** Micro-Fit 3.0 Vertical Header, 3.00mm Pitch, Single Row, 3 Circuits, with PCB Press-fit Metal Retention Clip, Gold, Glow-Wire Capable, Black

**Documents:**


|   |  |
|---|--|
| <a href="#">Drawing (PDF)</a>                                   | <a href="#">Test Summary TS-43045-002-001 (PDF)</a>  |
| <a href="#">3D Model (PDF)</a>                                  | <a href="#">Test Summary TS-46235-001-001 (PDF)</a>  |
| <a href="#">3D Model</a>  | <a href="#">Datasheet (PDF)</a>                      |
| <a href="#">Product Specification PS-43650 (PDF)</a>            | <a href="#">RoHS Certificate of Compliance (PDF)</a> |
| <a href="#">Packaging Specification PK-70873-0811-001 (PDF)</a> | <a href="#">Product Literature (PDF)</a>             |
| <a href="#">Test Summary TS-43045-001-001 (PDF)</a>             |  |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |  |
|----------------|--|
| Product Family | PCB Headers  |
| Series         | <u>43650</u>   |
| Application    | Power, Wire-to-Board   |
| Comments       | <p>High Temperature Square Pin Offset Through Hole Mounting Solder Type&lt;P&gt;&lt;P&gt;This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. &lt;P&gt;&lt;P&gt; The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). &lt;P&gt; If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. High Temperature Square Pin Offset Through Hole Mounting Solder Type&lt;P&gt;&lt;P&gt;This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. &lt;P&gt;&lt;P&gt; The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard</p> |

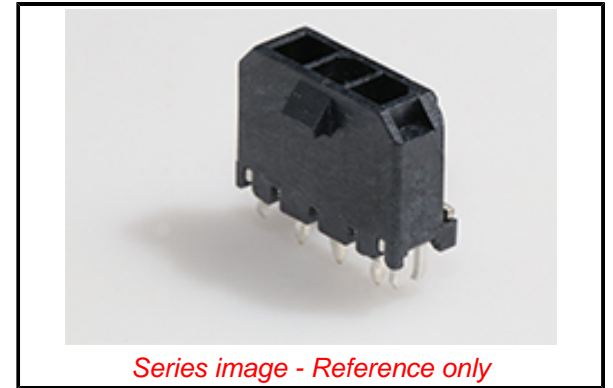

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/71/2019 (16 July 2019)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

43650 Series

**Mates With**

Micro-Fit 3.0 Receptacle Housing 43645  
 <br>Micro-Fit 3.0 TPA Receptacle Housing 171850

IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""""

Micro-Fit Connector System

Overview  
Product Name  
UPC

Micro-Fit 3.0  
800754827836

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 3                              |
| Circuits (maximum)             | 3                              |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 30                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | Yes                            |
| Mated Height                   | 17.27mm                        |
| Material - Metal               | Brass                          |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 0.688/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Vertical                       |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Tray                           |
| Pitch - Mating Interface       | 3.00mm                         |
| Plating min - Mating           | 0.762µm                        |
| Plating min - Termination      | 2.540µm                        |
| Polarized to PCB               | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Surface Mount Compatible (SMC) | Yes                            |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface: Style   | Through Hole - Kinked Pin      |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 8.5A |
| Voltage - Maximum             | 600V |

**Solder Process Data**

|  |          |
|--|----------|
| Duration at Max. Process Temperature (seconds) | 030      |
| Lead-free Process Capability                   | SMC&WAVE |
| Max. Cycles at Max. Process Temperature        | 003      |
| Process Temperature max. C                     | 260      |

**Material Info**

**Reference - Drawing Numbers**

|                         |   |
|-------------------------|---|
| Packaging Specification | PK-70873-0811-001                                       |
| Product Specification   | PS-43650  |
| Sales Drawing           | SD-43650-007-001  |
| Symbol/Footprint Data   | SYM-43650-0318  |
| Test Summary            | TS-43045-001-001, TS-43045-002-001,<br>TS-46235-001-001 |

This document was generated on 01/16/2020

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**