

“Stay Connected” with




Liquid Tight Cordgrips

a PennEngineering® Company

Heyco® -Tite Brass Liquid Tight Cordgrips


Straight Thru, NPT Hubs

The Ultimate in Liquid Tight Strain Relief Protection

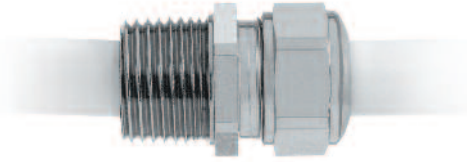

CABLE DIA. RANGE				PART NO.	THREAD SIZE	UL or RA	PART DIMENSIONS							
Minimum		Maximum					A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Flat Size	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.
.118	3,0	.157	4,0	4560	NPT 1/8	cULus	.445	11,3	.91	23,0	.31	8,0	.51	13,0
.157	4,0	.236	6,0	4561										
.138	3,5	.197	5,0	4562	NPT 1/4	cULus	.540	13,7	1.14	29,0	.47	12,0	.59	15,0
.197	5,0	.256	6,5	4563										
.256	6,5	.315	8,0	4564										
.138	3,5	.177	4,5	4565	NPT 3/8	cULus	.680	17,3	1.26	32,0	.47	12,0	.71	18,0
.177	4,5	.236	6,0	4566										
.236	6,0	.315	8,0	4567										
.315	8,0	.413	10,5	4568	NPT 3/8	cULus	.680	17,3	1.34	34,0				
.236	6,0	.315	8,0	4569	NPT 1/2	cULus	.875	22,2	1.42	36,0	.59	15,0	.94	24,0
.315	8,0	.433	11,0	4570										
.433	11,0	.591	15,0	4571	NPT 1/2	cULus	.875	22,2	1.50	38,0				
.374	9,5	.492	12,5	4572	NPT 3/4	cULus	1.040	26,4	1.69	43,0	.59	15,0	1.18	30,0
.492	12,5	.630	16,0	4573										
.630	16,0	.807	20,5	4574										
.551	14,0	.669	17,0	4575	NPT 1	cULus	1.326	33,7	1.89	48,0	.79	20,0	1.42	36,0
.669	17,0	.827	21,0	4576										
.827	21,0	1.004	25,5	4577										
.787	20,0	.945	24,0	4578	NPT 1-1/4	cULus	1.680	42,7	2.01	51,0	.79	20,0	1.81	46,0
.945	24,0	1.122	28,5	4579										
1.122	28,5	1.299	33,0	4580										
1.142	29,0	1.299	33,0	4581	NPT 1-1/2	cULus	1.920	48,8	2.20	56,0	.87	22,0	2.17	55,0
1.299	33,0	1.457	37,0	4582										
1.457	37,0	1.614	41,0	4583										
1.378	35,0	1.575	40,0	4584	NPT 2	cULus	2.400	61,0	2.32	59,0	.87	22,0	2.76	70,0
1.575	40,0	1.811	46,0	4585										
1.811	46,0	2.047	52,0	4586										

- Nickel plated brass construction for superior protection of flexible cables.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- IP 68 rated.
- For use in clearance or threaded holes.
- Long NPT threads provide additional threads for easy locknut assembly.
- Multiple sizes for flexible cord diameters ranging from .118" (3,0 mm) to 2.047" (52,0 mm).
- We recommend using the smallest cordgrip that accommodates your cable size.
- Sealing gland is molded in Thermoplastic Polymer Elastomer (TPE) Material.
- **Locknuts not included.** For metal locknut specifications or to order locknuts separately, see page 3-48.
- DFARS Compliant

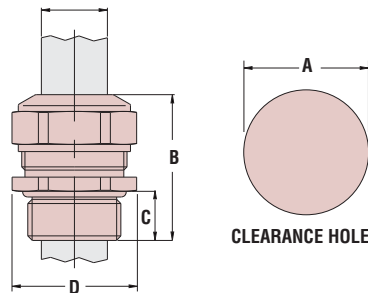

Material	Nickel-Plated Brass w/TPE Sealing Gland
Certifications	cULus Certified by UL for Compliance with both Canadian and U.S. requirements Under File E51579.
	cRAus Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements.
Temperature Range	-40°F (-40°C) to 212°F (100°C)
IP Rating	IP 68, IP 69K

Quick Specs