

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [45970-4715](#)
Status: **Active**
Overview: SEARAY*
Description: 1.27mm by 1.27mm Pitch SEARAY* Plug, 400 Circuits, 7.00mm Unmated Height, 10 Rows, Lead-Free

Documents:

| | |
|--|--|
| 3D Model | Application Specification AS-45970-990 (PDF) |
| Drawing (PDF) | Test Summary TS-45970-001 (PDF) |
| Product Specification PS-45970-001 (PDF) | Test Summary TS-45970-002 (PDF) |
| Product Specification PS-45970-002 (PDF) | RoHS Certificate of Compliance (PDF) |
| Application Specification AS-45970-002 (PDF) | |

Agency Certification


| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|-------------------------|
| Product Family | PCB Headers |
| Series | 45970 |
| Application | Board-to-Board, Signal |
| Overview | SEARAY* |
| Product Name | SEARAY* |
| UPC | 883906530235 |

Physical

| | |
|--------------------------------|--------------------------------|
| Breakaway | No |
| Circuits (Loaded) | 400 |
| Circuits (maximum) | 400 |
| Color - Resin | Black |
| Durability (mating cycles max) | 100 |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Compliant | No |
| Guide to Mating Part | Yes |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Metal | Copper Alloy |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 9.264/g |
| Number of Rows | 10 |
| Orientation | Vertical |
| PCB Locator | Yes |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Embossed Tape on Reel |
| Pitch - Mating Interface | 1.27mm |
| Pitch - Termination Interface | 1.27mm |
| Plating min - Mating | 0.762µm |
| Plating min - Termination | 2.540µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Robotic Placement | Pick and Place Cap |
| Shrouded | No |

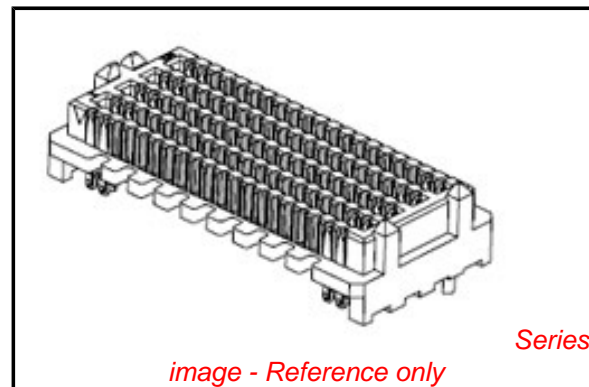

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[45970Series](#)

Mates With

[45971 SEARAY* Receptacle](#)

| | |
|--------------------------------|-----------------|
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |
| Temperature Range - Operating | -55°C to +125°C |
| Termination Interface: Style | Surface Mount |
| Unmated Height | 7.00mm |

Electrical

| | |
|-------------------------------|---------|
| Current - Maximum per Contact | 2.7A |
| Voltage - Maximum | 240V AC |

Solder Process Data

| | |
|--|---------------------------|
| Duration at Max. Process Temperature (seconds) | 3 |
| Lead-free Process Capability | Reflow Capable (SMT only) |
| Max. Cycles at Max. Process Temperature | 1 |
| Process Temperature max. C | 260 |

Material Info

Reference - Drawing Numbers

| | |
|---------------------------|--|
| Application Specification | AS-45970-002, AS-45970-990 |
| Electrical Model Document | EE-45970-007, EE-45970-010, EE-45970-015 |
| Product Specification | PS-45970-001, PS-45970-002 |
| S-Parameter Model | SP-45970-007, SP-45970-010, SP-45970-015 |
| Sales Drawing | SD-45970-001 |
| Test Summary | TS-45970-001, TS-45970-002 |

*SEARAY is a trademark of Samtec, Inc.

This document was generated on 06/03/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION