

Mini / EvoSIGNAL

## Mini TwinLIGHT Combi 12VAC/DC GN



|           |                |
|-----------|----------------|
| Part No.: | 460.210.74     |
| Series:   | EvoSIGNAL Mini |



| MECHANICAL DATA              |                             |
|------------------------------|-----------------------------|
| Height                       | 85 mm                       |
| Diameter                     | 62 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Green                       |
| Housing colour               | Grey                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Type of fixing               | Wall mounting               |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| UL Type Rating               | Type 12                     |
| Weight with packaging        | 101 g                       |
| Product weight               | 79 g                        |

| ELECTRICAL DATA             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 12V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 12 VDC             |
| Rated operational current   | 98 mA              |
| Rated inrush current        | 2000 mA            |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |
| Overvoltage category        | III                |

| OPTICAL DATA         |                        |
|----------------------|------------------------|
| Light source         | LED                    |
| Light colour         | Green                  |
| Optical signal image | Permanent<br>TwinLight |
| Blink frequency (Hz) | 1 Hz                   |
| Service life optical | 50,000 h minimum       |

| ACUSTICAL DATA                 |             |
|--------------------------------|-------------|
| Volume/dB(max) at 1 m distance | 95,0 dB (A) |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Mini / EvoSIGNAL

**Mini TwinLIGHT Combi 12VAC/DC GN**

|                       |                               |
|-----------------------|-------------------------------|
| Acoustic signal image | Continuous tone<br>Pulse tone |
| Number of tones       | 2 tone                        |
| Audio frequency       | 4000 Hz                       |
| Acoustic service life | 5,000 h minimum               |

**DRAWING**

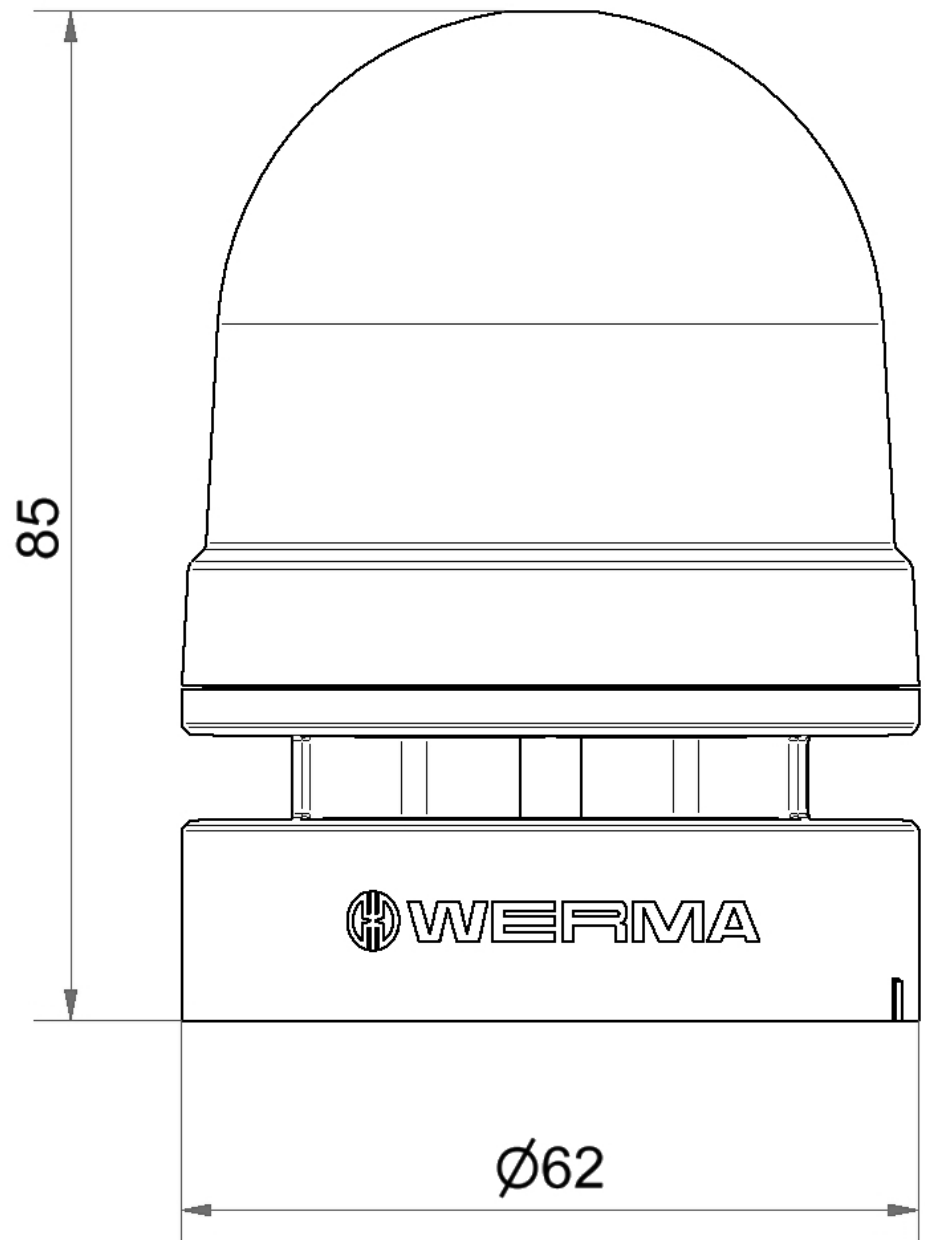

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.