

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [46113-0243](#)
Status: **Active**
Overview: [EXTreme LPHPower™](#)
Description: 1.27mm Pitch, EXTreme LPHPower™ Receptacle Header, Vertical, 24 Signal Contact, Select Gold (Au) Plating, with BMI Guides

Documents:

[3D Model](#) [Product Specification PS-46114-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Receptacles
 Series [46113](#)
 Application Board-to-Board, Signal
 Overview [EXTreme LPHPower™](#)
 Product Name EXTreme LPHPower™
 UPC 800756886114

Physical

(p)ower-(s)ignal Configuration 24s - 0p
 Circuits (Loaded) 24
 Circuits (maximum) 24
 Color - Resin Black
 Durability (mating cycles max) 250
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part Yes
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal High Performance Alloy (HPA)
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 3.386/g
 Number of Rows 2
 Orientation Vertical
 PC Tail Length 2.58mm
 PCB Locator No
 PCB Retention None
 Packaging Type Tray
 Pitch - Mating Interface 1.27mm
 Pitch - Termination Interface 1.27mm
 Plating min - Mating 0.762µm
 Plating min - Termination 1.270µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Stackable No
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -40°C to +105°C
 Termination Interface: Style Through Hole

Electrical

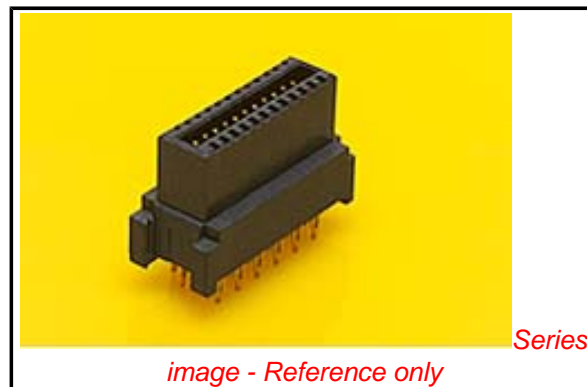


image - Reference only

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

46113Series

Mates With

45985 EXTreme LPHPower™ Header

Current - Maximum per Contact	1A
Grounding to PCB	No
Voltage - Maximum	250V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Product Specification	PS-46114-001
Sales Drawing	SD-46113-200

This document was generated on 02/22/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION