

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [46207-0106](#)

Status: **Active**

Overview: [Mini-Fit® RTC](#)

Description: 4.20mm Pitch Mini-Fit® RTC Reflow High Temperature Compatible Header, Dual Row, Vertical, 6 Circuits, 2.36mm PCB Thickness, with PCB Pegs, LCP Housing, with Tin (Sn) Over Nickel (Ni) Plating, Glow Wire Compliant

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-46207-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|---|
| Product Family | PCB Headers |
| Series | 46207 |
| Application | Board-to-Board, Power, Wire-to-Board |
| Comments | Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit® Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.. This Molex product is manufactured from material that has the following ratings, tested by independent agencies : . a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. . b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire. . . The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). . . If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. |
| Overview | Mini-Fit® RTC |
| Product Name | Mini-Fit® RTC |
| UPC | 800756741192 |

Physical

| | |
|--------------------------------|-------|
| Breakaway | No |
| Circuits (Loaded) | 6 |
| Circuits (maximum) | 6 |
| Color - Resin | Black |
| Durability (mating cycles max) | 100 |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Compliant | Yes |
| Guide to Mating Part | No |

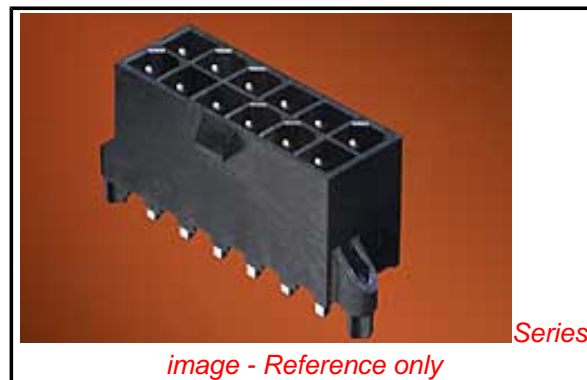

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[46207Series](#)

Mates With

[5557](#) Mini Fit Jr.™ Receptacle

| | |
|--------------------------------|--------------------------------|
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Nickel |
| Material - Plating Termination | Matte Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 2.393/g |
| Number of Rows | 2 |
| Orientation | Vertical |
| PC Tail Length | 4.46mm |
| PCB Locator | Yes |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 2.36mm |
| Packaging Type | Tray |
| Pitch - Mating Interface | 4.20mm |
| Pitch - Termination Interface | 4.20mm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Shrouded | Fully |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |
| Temperature Range - Operating | -40°C to +105°C |
| Termination Interface: Style | Through Hole |

Electrical

| | |
|-------------------------------|------------------|
| Current - Maximum per Contact | 13A |
| Voltage - Maximum | 600V AC (RMS)/DC |

Solder Process Data

| | |
|--|------------------------------|
| Duration at Max. Process Temperature (seconds) | 30 |
| Lead-free Process Capability | SMC & Wave Capable (TH only) |
| Max. Cycles at Max. Process Temperature | 3 |
| Process Temperature max. C | 265 |

Material Info

Reference - Drawing Numbers

| | |
|-----------------------|--------------|
| Product Specification | PS-46207-001 |
| Sales Drawing | SD-46207-001 |

This document was generated on 06/03/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION