


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0464369210](#)  
**Status:** **Active**  
**Overview:** EXTreme Ten60Power High-Current Connector  
**Description:** EXTreme Ten60Power Right-Angle Receptacle without Guides, 10 DC Power Circuits, Press Fit Tail

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 464361000-TS-000 (PDF)</a>
<a href="#">Product Specification PS-46436-100-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Application Specification AS-46436-100-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Packaging Specification PK-46436-001-000 (PDF)</a>	

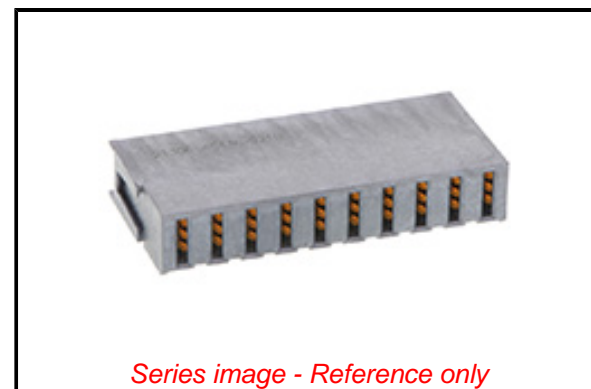

**Agency Certification**

CSA	LR19980
UL	E29179

**General**

Product Family	PCB Receptacles
Series	<a href="#">46436</a>
Application	Board-to-Board, Power
Comments	See Product Specification for details
Overview	<a href="#">EXTreme Ten60Power High-Current Connector</a>
Product Name	EXTreme Ten60Power
UPC	195842671720

**Physical**

(p)ower-(s)ignal Configuration	10p - 0s
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Black
Durability (mating cycles max)	200
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	10.00mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	28.630/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.28mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	5.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[46436 Series](#)

**Mates With**

[EXTreme Ten60Power Right-Angle Plug  
464379210](#)

Termination Interface: Style Through Hole - Compliant Pin

**Electrical**

Current - Maximum per Contact 60.0A  
Grounding to PCB No  
Voltage - Maximum 600V AC / 250V DC

**Material Info**

**Reference - Drawing Numbers**

Application Specification AS-46436-100-001  
Packaging Specification PK-46436-001-000  
Product Specification PS-46436-100-001  
Sales Drawing SD-46436-9000-001  
Test Summary 464361000-TS-000

This document was generated on 02/01/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[46436-9210](#)