


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0464379205](#)
Status: **Active**
Overview: EXTreme Ten60Power High-Current Connector
Description: EXTreme Ten60Power Right-Angle Plug without Guides, 5 DC Power Circuits, Press Fit Tail

Documents:

Drawing (PDF)	Test Summary 464361000-TS-000 (PDF)
Product Specification PS-46436-100-001 (PDF)	Datasheet (PDF)
Application Specification AS-46436-100-001 (PDF)	RoHS Certificate of Compliance (PDF)
Packaging Specification PK-46437-001-000 (PDF)	

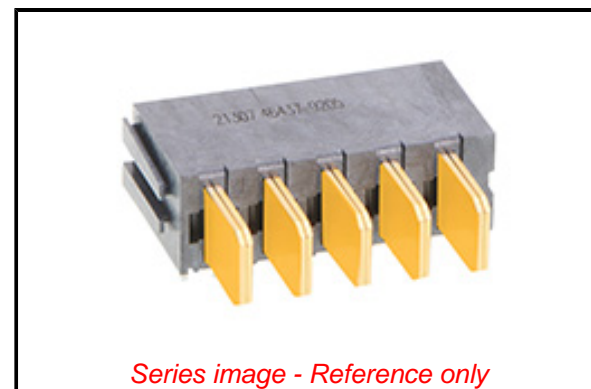

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	46437
Application	Board-to-Board, Power
Comments	See Product Specification for details
Overview	EXTreme Ten60Power High-Current Connector
Product Name	EXTreme Ten60Power
UPC	195842670754

Physical

(p)ower-(s)ignal Configuration	5p - 0s
Breakaway	No
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	10.00mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	14.850/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.28mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	5.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[46437 Series](#)

Mates With

EXTreme Ten60Power Right-Angle Receptacle [464369205](#) . EXTreme Ten60Power Vertical Receptacle [465629205](#)

Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	60.0A
Voltage - Maximum	600V AC / 250V DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-46436-100-001
Packaging Specification	PK-46437-001-000
Product Specification	PS-46436-100-001
Sales Drawing	SD-46437-9000-001
Test Summary	464361000-TS-000

This document was generated on 02/01/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[46437-9205](#)