


## Strip Block for Snap-in Mounting with 4 IEC Appliance Outlets F

**Description**

- Panel Mount:  
Snap-in version from front side
- 2 Functions:  
Module of 4 outlets, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

**Approvals**

- VDE Certificate Number: 40030337
- UL File Number: E96454
- CSA File Number: 56242

**Characteristics**

- Busbar is of single piece (no soldering)
- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

**Other versions on request**

- For protection class II

**References****Weblinks**


[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

**Technical Data**

Ratings IEC	10A / 250VAC; 50Hz	Appliance Outlet	F acc. to IEC/EN 60320-2-2,
Ratings UL/CSA	15A / 250VAC; 60Hz		UL 498 CSA C22.2 no. 42 (for cold
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)		conditions) pin-temperature 70 °C, 10A,
Allowable Operation Temp.	-25 °C to 70 °C		Protection Class 1
Degree of Protection	from front side IP 30 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140		
Terminal	Solder terminals or quick connect terminals		
Panel Thickness s	Snap-in1/1.2/1.5/2/2.5/3 mm tolerance +0.0/-0.1		
Material: Housing	Thermoplastic, black, UL 94V-0		

**Dimensions**

Quadbloc 4752

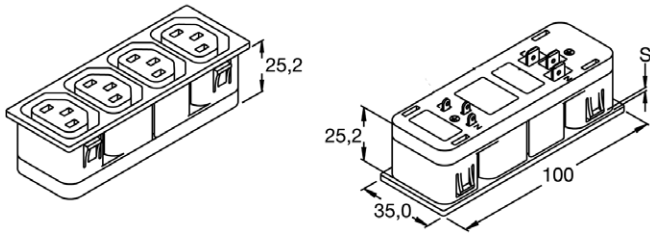

Panel cut-out 96,2 x 32,5 mm, corner radius max. 1 mm

**Variants**

Panel Thickness s [mm]	Terminal	Length [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	100	4752.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	100	4752.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	100	4752.4200
2	Quick connect terminals 6.3 x 0.8 mm	100	4752.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	100	4752.6200
3	Quick connect terminals 6.3 x 0.8 mm	100	4752.7200
1	Solder terminals 4 x 0.8 mm	100	4752.3400
1.2	Solder terminals 4 x 0.8 mm	100	4752.8400
1.5	Solder terminals 4 x 0.8 mm	100	4752.4400
2	Solder terminals 4 x 0.8 mm	100	4752.5400
2.5	Solder terminals 4 x 0.8 mm	100	4752.6400
3	Solder terminals 4 x 0.8 mm	100	4752.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	4752.7000

Please note, all quadblocs are available in protection-class II upon request.

Cord retaining clamp see accessories

**Packaging unit** 50 Pcs

Accessories

Description



[Cord retaining kits](#)  
Cord retaining strain relief

Flat head, E	4700.0005
Flat head, G	4700.0007

Mating Inlets/Plugs

Category / Description

[Interconnection CordOverview complete](#)



Interconnection Cord with IEC Plug E, Angled	0607
Interconnection Cord with IEC Plug E, Angled	0608
Interconnection Cord with IEC Plug E, Straight	0609
Interconnection Cord with IEC Plug G, Angled	607B
Interconnection Cord with IEC Plug G, Angled	608B

[Interconnection Cordfurther types to4752](#)

...

[PlugOverview complete](#)



IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm	4732
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4733
IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm	4735
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4736
IEC Plug E, Cord Connector (Rewireable), Straight	9009

[Plugfurther types to4752](#)

...