




**Part Number :** [787840002](#)

**Product Description :** 1.27mm Signal Pitch, 0.80mm Signal Pitch, 1.27mm Power Pitch SAS-3/PCIe-3 Receptacle, Vertical, Surface Mount, with 2.00mm Blade, 8.15mm Height, 2.00mm Peg Length, 2.36mm PCB Thickness, 68 Circuits, with Cap, Embossed Tape and Reel, Lead-Free

**Series Number :** 78784

**Status :** Active

**Product Category :** I/O Connectors

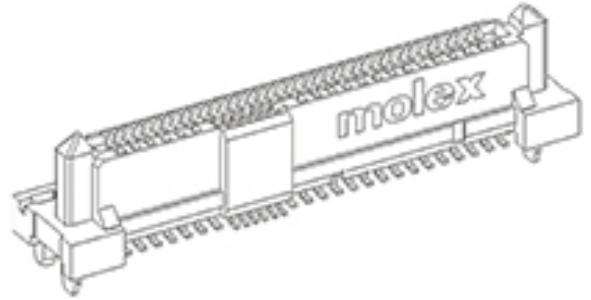

---

## Documents & Resources

### Drawings

[787840002\\_sd.pdf](#)

[PK-78784-001-000.pdf](#)

### 3D Models and Design Files

[787840002\\_stp.zip](#)

### Specifications

[AS-78784-001-001.pdf](#)

[PS-78784-001-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	I/O Connectors
Series	78784
Description	1.27mm Signal Pitch, 0.80mm Signal Pitch, 1.27mm Power Pitch SAS-3/PCIe-3 Receptacle, Vertical, Surface Mount, with 2.00mm Blade, 8.15mm Height, 2.00mm Peg Length, 2.36mm PCB Thickness, 68 Circuits, with Cap, Embossed Tape and Reel, Lead-Free
Application	Board-to-Board
Comments	With Cap
Component Type	Receptacle
Product Name	SAS-3/PCIe-3,U.2 (SFF-8639)
Type	N/A
UPC	887191584904

#### Agency

UL	E29179
----	--------

#### Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V

#### Physical

Circuits Detail	Signal 53, Power 15
Circuits (Loaded)	68

Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	1.896/g
Number of Rows	2
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
Panel Mount	No
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Pitch - Mating Interface	0.80mm, 1.27mm
Pitch - Termination Interface	0.80mm, 1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	0° to +55°C
Termination Interface Style	Surface Mount

#### Solder Process Data

Max-Duration	10
Lead-Free Process Capability	REFLOW
Max-Cycle	1
Max-Temp	260

---

#### Mates With / Use With

## Mates with Part(s)

Description	Part Number
Mates With	U.2 (SFF-8639) Plugs, SFF-8482 and SFF-8680 Plugs, SAS / SATA Plugs

---

This document was generated on Feb 13, 2025