
Materials
1. Insulator: PBT + 15% GF, UL 94 HB, black
2. Shell: C3604 brass, 2 µm nickel plated
3. Pin: C2680 brass, 2 µm nickel plated
4 Nut: C3604 brass, 2 µm nickel plated


Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 30 mΩ or less

Mechanical Requirements
Insertion force: 0.3-3 kgf
Withdrawal force: 0.3-3 kgf
Life cycle: 5000 mating cycles while maintaining 0.3-2 kgf min. insertion force, 0.2-1.5 kgf min. withdrawal force and less than 100 mΩ contact resistance.

Environmental Requirements
Heat test: 70 °C, relative humidity 70-85% for 96 hours without deformation while maintaining contact resitance after test 100 mohms or less, and insulation resistance 50 Mohms/500 Vdc minimum
Humidity test: 40 °C, relative humidity 90-100% for 96 hours without deformation while maintaining dielectric strength 500 Vac/1 minute, insulation resistance 50 Mohms/500 Vdc minimum, and contact resistance 100 mohms or less
Salt spray test: 35±2 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 80 mΩ.



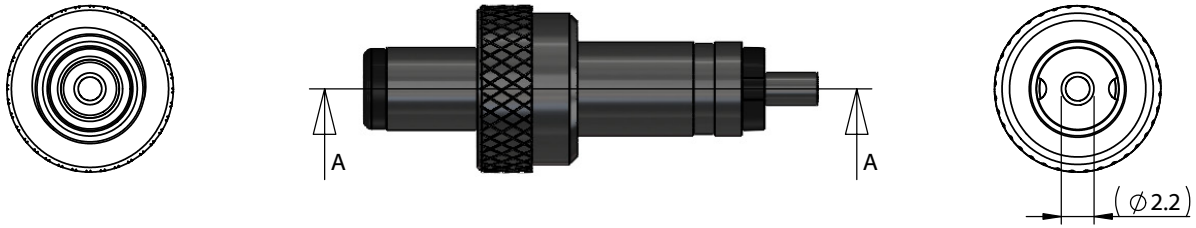

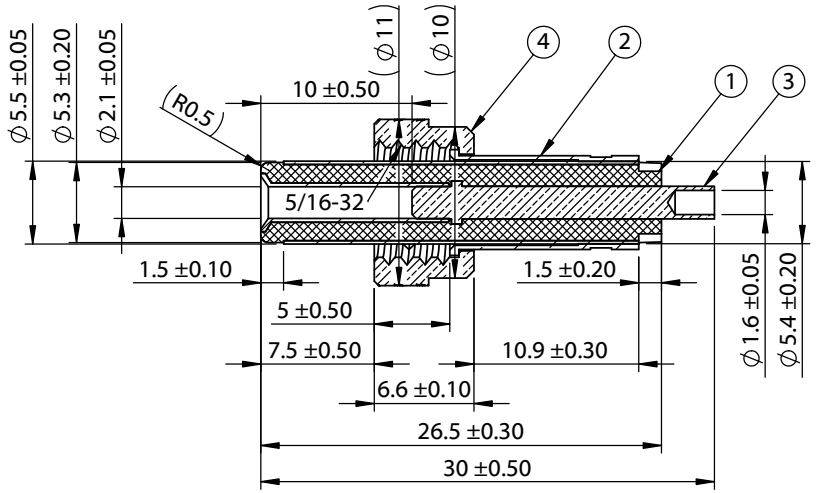

SECTION A-A

Revision:	Date:	Description:
A	5/19/2009	Initial release
A1	11/11/2015	Modified insulator material
A2	11/20/2017	Updated specifications

Prepared: CR Digitally signed by CR Date: 2026.01.21 13:49:15 -08'00'

Verified: KM Digitally signed by KM Date: 2026.02.24 14:59:04 -08'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32


TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A
Part number: 50-00010
Scale: 2:1
Sheet 1 of 2

5 4 3 2 1

Ratings
Maximum Operating Voltage: 48 V
Maximum Operating Current: 8.0 A

Operating Temperature Range
-25 ~ 120 °C, relative humidity of 85% or less

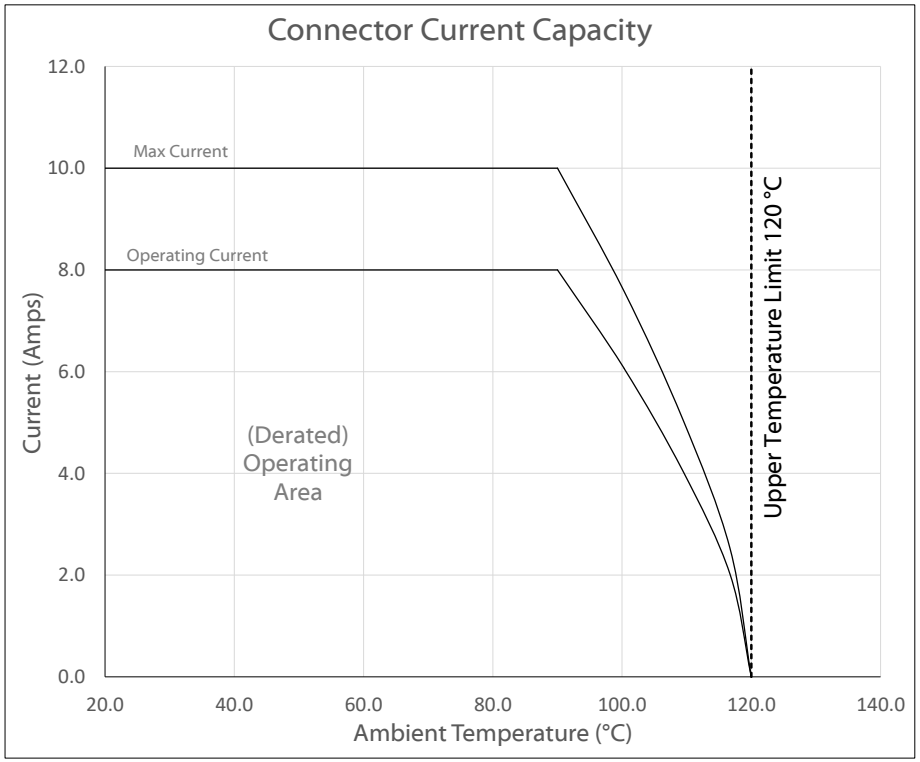

Testing based on IEC 60512-5-2. Max current curve generated with isolated test article under controlled environmental conditions, and does not take into account external factors such as housings,mating cables, or other circuitry. Operating current curve (derated by 20% of maximum values) accounts for external factors, and manufacturing variation.

Revision:	Date:	Description:
A	05/19/2009	Initial release
A1	11/11/2015	Modified insulator material
A2	11/20/2017	Updated specifications

Prepared: CR Digitally signed by CR Date: 2026.01.21 13:50:04 -08'00'

Verified: KM Digitally signed by KM Date: 2026.02.24 14:58:52 -08'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.3 mm
X.X: ± 0.1 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32

TENSILITY
tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A
Part number: 50-00010
Scale: 2:1
Sheet 2 of 2

5 4 3 2 1