

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5018763444](#)
Status: **Active**
Overview: iGrid Wire-to-Board Dual-Row System
Description: 2.00mm Pitch, iGrid PCB Header, Dual Row, Right-Angle, Through Hole, Through Hole, Tin (Sn) Plating, Positive Lock, 34 Circuits, Tray, 3.20mm PC Tail Length, Blue

Documents:

| | |
|---|--|
| 3D Model | Application Specification 5016460000-A00 (PDF) |
| 3D Model (PDF) | Application Specification 5016460000-A01 (PDF) |
| Drawing (PDF) | Packaging Specification SPK-501876-001-001 (PDF) |
| Product Specification 5016461001-PS-001 (PDF) | Datasheet (PDF) |
| Product Specification PS-501646-001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General


| | |
|----------------|---|
| Product Family | PCB Headers |
| Series | 501876 |
| Application | Signal, Wire-to-Board |
| Overview | iGrid Wire-to-Board Dual-Row System |
| Product Name | iGrid |
| UPC | 822350171557 |

Physical

| | |
|--------------------------------|----------------|
| Breakaway | No |
| Circuits (Loaded) | 34 |
| Circuits (maximum) | 34 |
| Color - Resin | Blue |
| Durability (mating cycles max) | 30 |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Keying to Mating Part | Yes |
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Nylon |
| Net Weight | 3.687/g |
| Number of Rows | 2 |
| Orientation | Right Angle |
| PC Tail Length | 3.20mm |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.20mm, 1.60mm |
| Packaging Type | Tray |
| Pitch - Mating Interface | 2.00mm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | No |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | Through Hole |

Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 2.0A |
|-------------------------------|------|

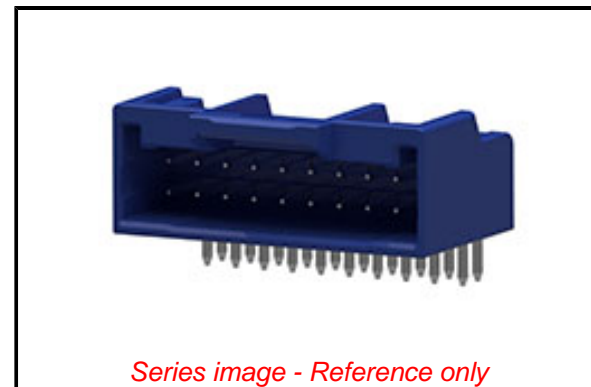

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[501876 Series](#)

Mates With

iGrid Receptacle Housing [501646](#)

Voltage - Maximum

250V AC (RMS)/DC

Material Info

Cross-Plant Material Status

LT

Reference - Drawing Numbers

Application Specification

5016460000-A00, 5016460000-A01

Packaging Specification

SPK-501876-001-001

Product Specification

5016461001-PS-001, PS-501646-001-001

Sales Drawing

5018760000-SD-000

This document was generated on 08/24/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION