

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [50-29-1031](#)
Status: **Active**
Overview: Standard .093"
Description: 2.36mm Diameter Standard .093" Pin and Socket Header, Shrouded, 3 Circuits

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [3099](#)
 Application Power, Wire-to-Board
 Comments Solder Type|Round Pin
 Overview [Standard .093"](#)
 Product Name Standard .093"
 UPC 800755008067

Physical

Breakaway No
 Circuits (Loaded) 3
 Circuits (maximum) 3
 Color - Resin Black
 Durability (mating cycles max) 25
 Flammability 94V-2
 Glow-Wire Compliant No
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Polyester
 Net Weight 0.848/g
 Number of Rows 1
 Orientation Vertical
 PCB Locator Yes
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 5.03mm
 Polarized to PCB Yes
 Shrouded Fully
 Stackable No
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating -40°C to +105°C
 Termination Interface: Style Through Hole

Electrical


Current - Maximum per Contact 5A
 Voltage - Maximum 250V

Material Info

Old Part Number 3099-03A1

Reference - Drawing Numbers

Sales Drawing SD-3099-3*

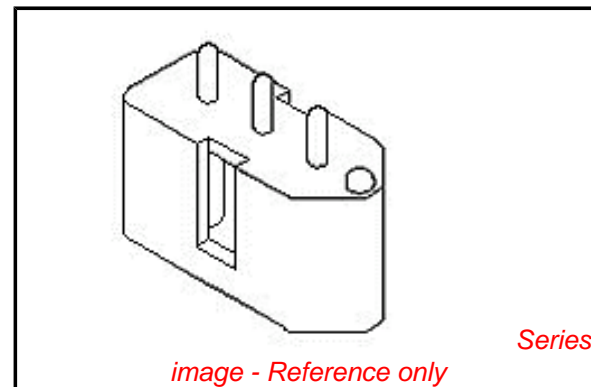

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Low-Halogen

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

[3099Series](#)

Mates With

[1490 Receptacle](#), [1292 Receptacle](#),
[1396 Receptacle](#), [1375 Receptacle](#), [1360
Receptacle](#), [1261 Receptacle](#)

This document was generated on 01/17/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION