

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0522880611](#)
Status: **Obsolete**
Overview: [cgrid_sl_products](#)
Description: 2.00mm (.079") Pitch Jumper Socket, Removable Type, Right Angle, 6 Circuits

Documents:
[Drawing \(PDF\)](#)

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|---------------------|-------------------------------------|
| Product Family | Ribbon Cable / Wire Trap Connectors |
| Series | 52288 |
| Comments | Removable Type |
| Component Type | One Piece |
| Glow-Wire Compliant | No |
| Overview | cgrid_sl_products |
| Product Name | Board-In, Jumper Socket |

Physical

| | |
|--------------------------------|---------------------|
| Circuits (Loaded) | 6 |
| Entry Angle | 90° Angle |
| Flammability | 94V-0 |
| Lock to Mating Part | None |
| Number of Rows | 1 |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 1.60mm (.063") |
| Packaging Type | Tube |
| Pitch - Mating Interface | 2.00mm (.079") |
| Polarized to Mating Part | N/A |
| Polarized to PCB | No |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -40°C to +105°C |
| Wire Insulation Diameter | 1.60mm (.063") max. |
| Wire Size AWG | 26 |
| Wire/Cable Type | Ribbon Cable |


Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 2A |
| Voltage - Maximum | 150V |

Material Info

Reference - Drawing Numbers

| | |
|-----------------------|---------------|
| Product Specification | PS-52287-001 |
| Sales Drawing | SD-52288-**11 |

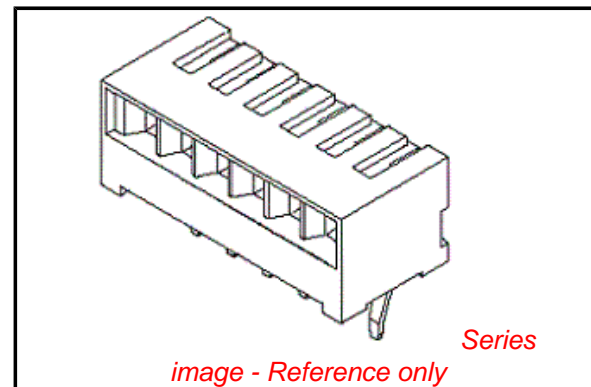

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status
Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[52288Series](#)

Mates With

N/A

Use With

Topcoated ribbon cable