



MODEL 52F CRASH TEST ACCELEROMETER

Specifications

- Small Size, Ideal for Side Impact Testing
- Next Generation Piezoresistive MEMS Sensor
- $\pm 50g$ to $\pm 6000g$ Dynamic Ranges
- Compliant to SAE J211/J2570
- Compliant to ISO 6487
- High Ove Range Protection

Features

- Weight <1.0 grams
- Linearity <1%
- 10,000g Shock Protection
- 2-10Vdc Excitation
- IP66 Environmentally Sealed
- Optimum Gas Damping
- Low Noise, Durable Cable

Applications

- Crush Zone Testing
- Side Impact Testing
- Auto Safety Testing Applications
- Biomechanical Studies
- Transient Drop Testing
- Helmet Impact Testing

The TE Connectivity model 52F Accelerometer has recently been upgraded to incorporate the most advanced piezoresistive MEMS sensor on the market. The accelerometer features the next generation of the reliable TE Connectivity piezoresistive chip with superior stability and measurement accuracy. The model 52F accelerometer is available in ranges from $\pm 50g$ to $\pm 6000g$ and features a full-bridge configuration with a nominal 4000Ω impedance that offers quick warm-up time and minimal drift, unlike lower impedance designs on the market.

The accelerometer is packaged in a low-profile Aluminum housing with a shielded low-noise cable specifically designed ideal for tight and challenging installations. The model 52F has an ideal amount of internal gas damping which provides outstanding shock survivability and a flat amplitude and phase response up to 8000Hz.

The model 52F accelerometer is fully encapsulated in Stycast for IP66 protection over the full operating temperature range of -40°C to $+90^{\circ}\text{C}$. TE Connectivity also supplies the calibration data in a user friendly excel format which enables high volume users to quickly upload the calibration information for each sensor installed.

MODEL 52F ACCELEROMETER

Performance Specifications

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. TE Connectivity reserves the right to update and change these specifications without notice.

PARAMETERS

DYNAMIC							NOTES
Range (g)	±50	±100	±200	±500	±2000	±6000	
Sensitivity (mV/g) ¹	1.2-3.0	0.6-1.2	0.6-1.2	0.3-0.6	0.12-0.3	0.05-0.2	@10Vdc Excitation
Frequency Response (Hz)	0-1000	0-1200	0-1400	0-2000	0-4500	0-5000	±5%
	0-1400	0-1600	0-1900	0-2800	0-6000	0-8000	±1dB
Natural Frequency (Hz)	4000	6000	8000	15000	26000	28000	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1% on 'T' Option
Non-Linearity (%FSO)	±1	±1	±1	±1	±1	±1	
Damping Ratio	0.5	0.5	0.5	0.3	0.15	0.10	
Shock Limit (g)	10000	10000	10000	10000	10000	10000	

ELECTRICAL

Zero Acceleration Output (mV)	<±25						Differential
Excitation Voltage (Vdc)	2 to 10						
Input Resistance (Ω)	3500-4500						
Output Resistance (Ω)	3500-4500						
Insulation Resistance (MΩ)	>100						@100Vdc
Residual Noise (μV RMS)	<10						
Ground Isolation	Isolated from mounting surface						
Warm-up Time	<10 seconds						@10Vdc Excitation

ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	±0.04						From 0 to +50°C
Thermal Sensitivity Shift (%/°C)	-0.20 ±0.05						From 0 to +50°C
Operating Temperature (°C)	-40 to +90						
Storage Temperature (°C)	-40 to +90						
Humidity	Epoxy Sealed, IP66						

PHYSICAL


Case Material	Anodized Aluminum, Black						
Cable	4x #32 AWG Leads, PFA Insulated, Braided Shield, Polyurethane Jacket						
Weight (grams)	1.0						Cable not included
Mounting	2x #0-80 x 1/4" Socket Head Cap Screws						

¹ Output is ratiometric to excitation voltage


Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±1dB Frequency Limit
Optional accessories:	MTG-E4	Triaxial Mounting Block
	121	3-Channel Precision Low Noise DC Amplifier
	140A	Auto-Zero Inline Amplifier

MODEL 52F ACCELEROMETER

Typical Frequency Response

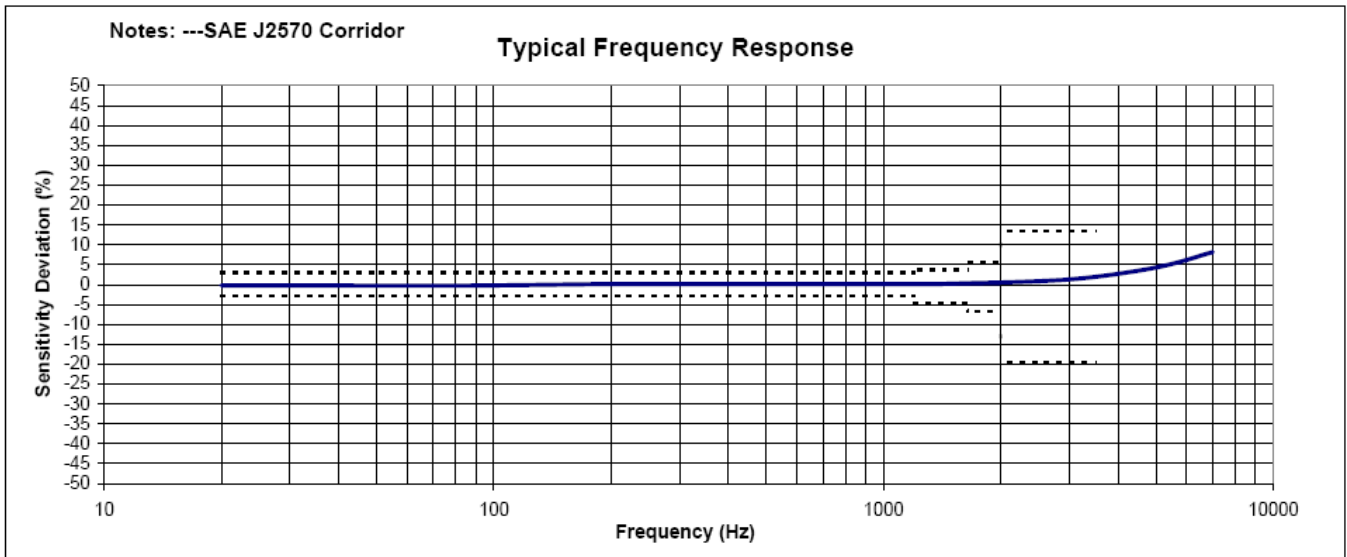


Schematic

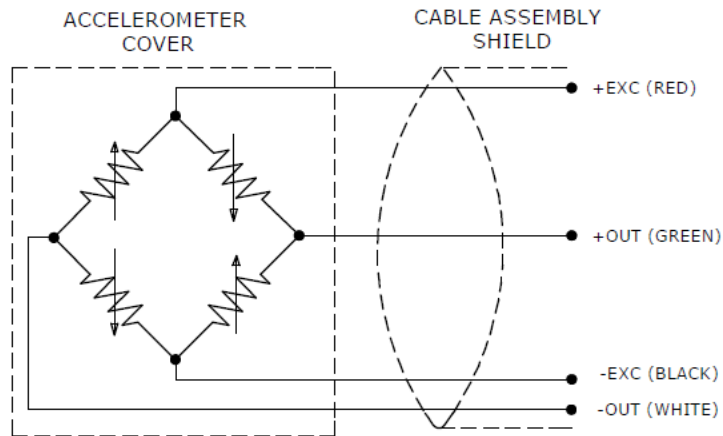

MODEL 52F ACCELEROMETER

Dimensions

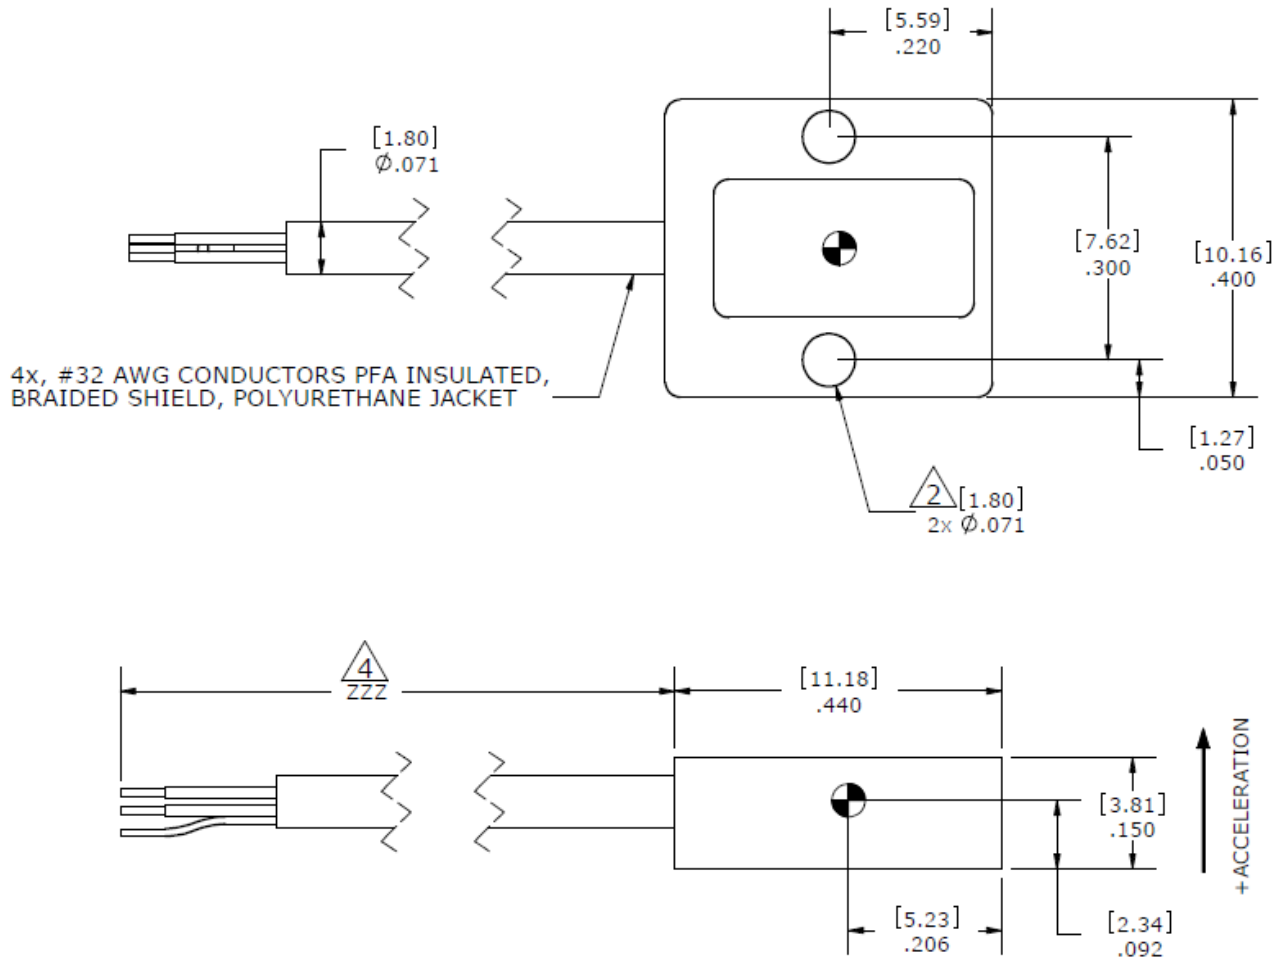

MODEL 52F ACCELEROMETER

Ordering Information

52F	GGGG	ZZZ	T	XXX
Range				
0050 = 50g				
0100 = 100g				
0200 = 200g				
0500 = 500g				
2000 = 2000g				
6000 = 6000g				
Cable length				
240 = 240 inches				
300 = 300 inches				
360 = 360 inches				
197 = 197 inches, 5 meters				
276 = 276 inches, 7 meters				
Transverse Sensitivity Option				
Blank = <3%				
T = <1%				
Excitation Voltage Option				
Blank = 10Vdc				
001 = 5Vdc				
002 = 2Vdc				

Example;52F-2000-360
Model 52F, 2000g range, 360inch (30ft) cable length

Example;52F-0500-276T-001
Model 52F, 500g range, 276inch (7m) cable length, <1% transverse sensitivity option, 5V calibration

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
customercare.hmpt@te.com

EUROPE

MEAS France SAS
a TE Connectivity Company
Tel: +31 73 624 6999
customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
customercare.shzn@te.com

te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Corporation. All Rights Reserved.

Version # 10/2020

