

F

E

D

C

B

A

F




E

D

C

B

A

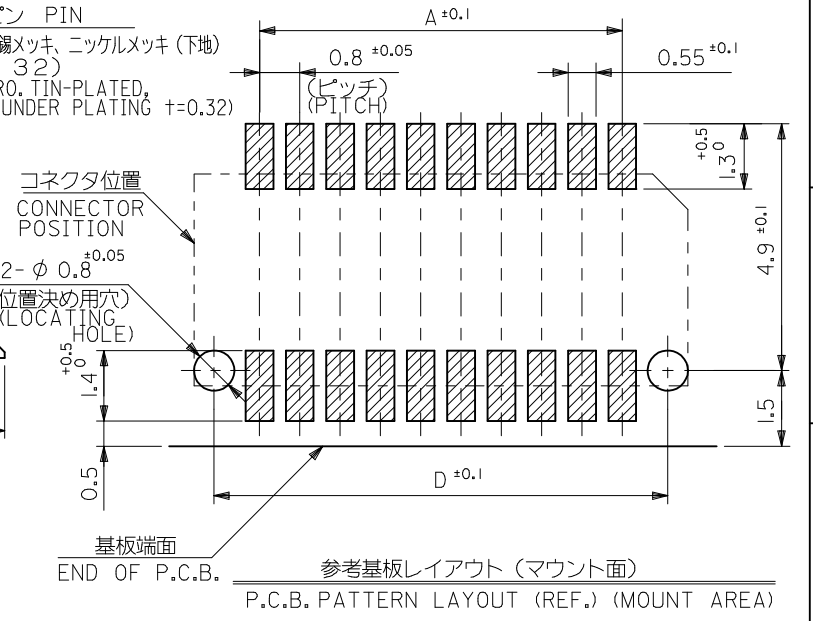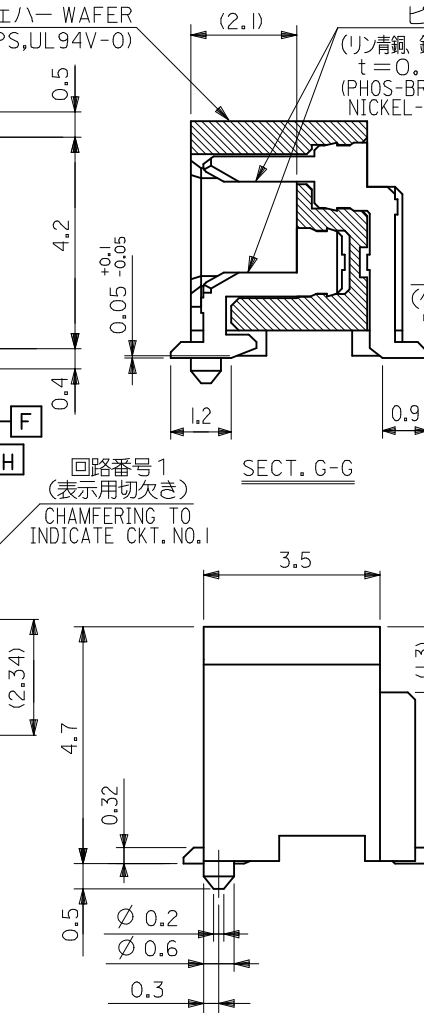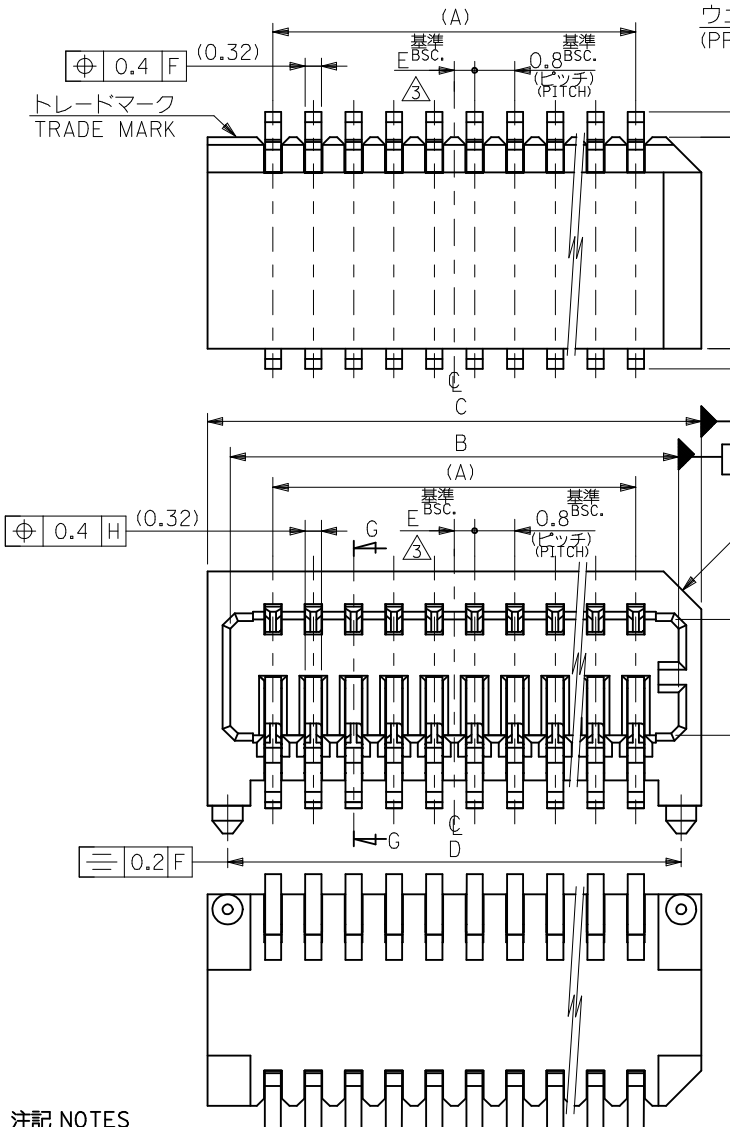

注記 NOTES

1. 嵌合相手: 52465, 52588 シリーズ
MATE WITH: 52465, 52588 SERIES
2. ウェハの C から隣接するピンの C 迄の位置を示す。
SHOW POSITION FROM C OF WAFER TO C OF ADJACENT PINS.
3. 本製品は 53309-**17 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 53309-**17.

REVISED	EC NO: J2014-0465	2013/09/12	DRWN: Y. ISHIDA	2013/09/12	CHKD: TASAKAWA	2013/09/13	APPR: TASAKAWA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
									10 UNDER	±0.2	DRAWN BY HKAWABATA	DATE 2004/03/10	TITLE 0.8 B/B CONN SMT WITH BOSS -LEAD FREE-					
									10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE 2004/03/10						
									30 OVER	±0.3	APPROVED BY MSASAO	DATE 2004/03/10	molex					
									ANGULAR ±3 °	MATERIAL NO.		DOCUMENT NO.					SHEET NO.	
REV	A								DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		SEE DRAWING		SD-53309-013		1 OF 2	

10 9 8 7 6 5 4 3 2 1

F F

E E


D D

C C

B B

A A


53309-***19 (位置決め用ボス付)
(WITH LOCATING BOSS)
嵌合相手 52465 シリーズ
MATES WITH 52465 SERIES

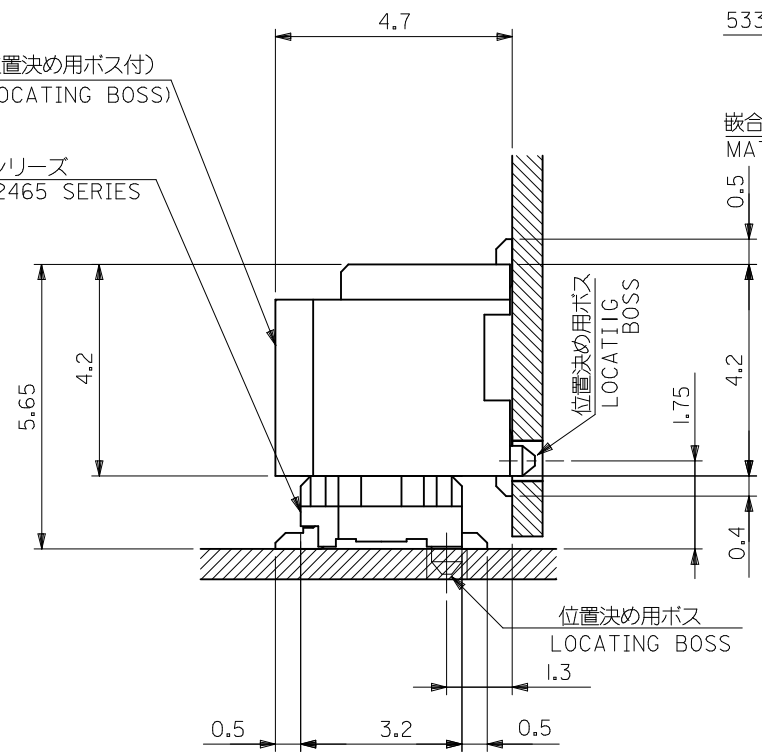

嵌合状態図 (参考)
MATED DRAWING(REF.)

53309-***19 (位置決め用ボス付)
(WITH LOCATING BOSS)

嵌合相手 52588 シリーズ
MATES WITH 52588 SERIES

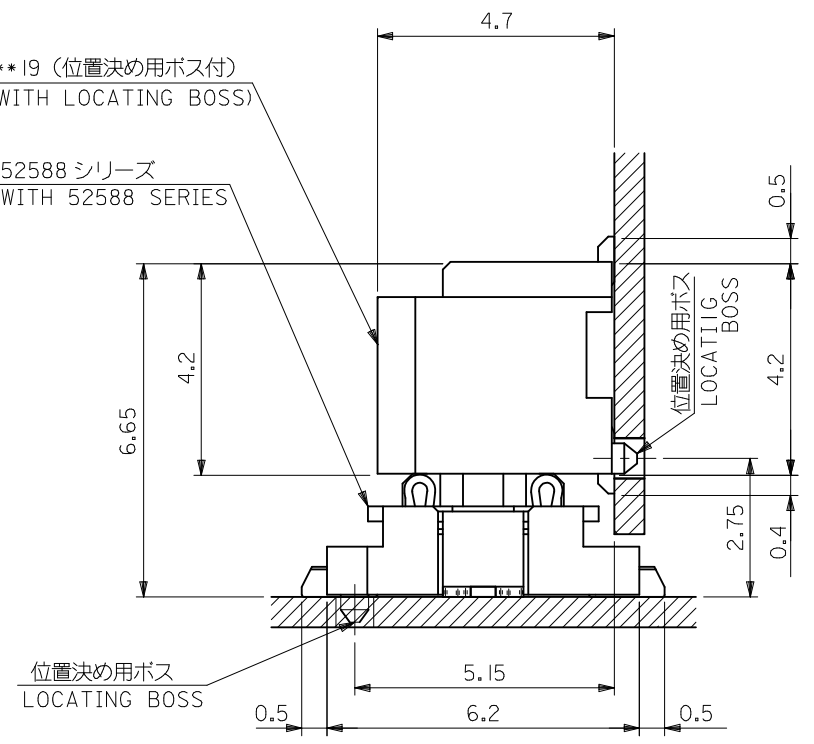

嵌合状態図 (参考)
MATED DRAWING(REF.)

9 8 7 6 5 4 3 2

REVISED EC NO: J2014-0465 DRWN:Y SHIDA 2013/09/13 CHKD:TASAKAWA 2013/09/13 APPR:TASAKAWA 2013/09/13 A	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY HKAWABATA	DATE 2004/03/10	TITLE 0.8 B/B CONN SMT WITH BOSS -LEAD FREE-				
		10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE 2004/03/10					
		30 OVER	±0.3	APPROVED BY MSASAO	DATE 2004/03/10	molex				
		ANGULAR ±3 °	MATERIAL NO.	DOCUMENT NO.	SHEET NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		REFER TO SHEET 1 OF 2		SD-53309-013		2 OF 2		
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

10

9

8

7

6

5

4


3

2


1

注記 NOTES


1. 梱包数量: 1000個/リール NUMBER OF CONNECTORS: 1000PCS/REEL
 2. リードテープ長さ LEAD TAPE LENGTH
 トップテープ TOP TAPE
 リーダー部 LEADER PART
 リーダー部 LEADER PART
 トップテープ TOP TAPE
 未接着部 NON-BONDED PART

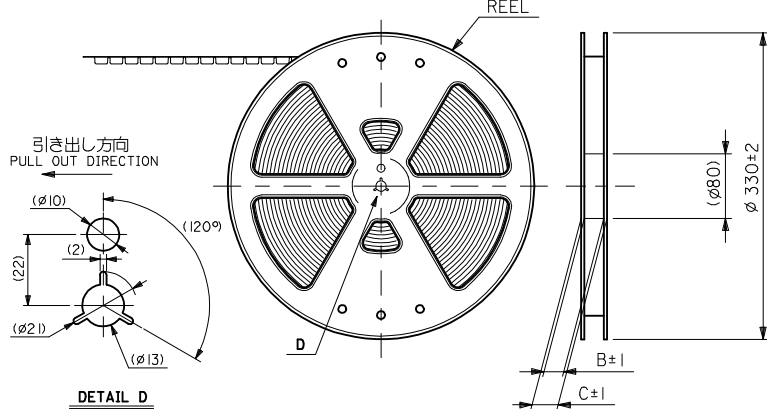


DETAIL D

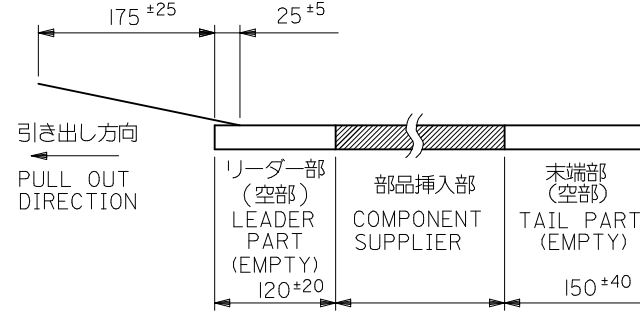



3. トップテープの剥離強度: (剥離方向は下図参照)
 0.1~1.3N {10~130gf} 尚、本規格値は、出荷時に適用。
 (但し、輸送時に剥離が発生しない事。)
 PEELING OFF FORCE OF TOP TAPE
 0.1~1.3N {10~130gf} (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
 THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
 PEEL OFF SHOULD NOT BE ALLOWED,
 DURING TRANSPORTATION



5. 材料(MATERIAL)
 キャリアテープ(CARRIER TAPE): ポリプロピレン(POLYPROPYLENE)
 トップテープ(TOPTAPE): PET, PE, PEF
 リール(REEL): ポリスチレン(PS) <リサイクル材を含む>
 POLYSTYREN(PS) <RECYCLE MATERIAL CONTAINED>
 6. 本製品は53309-**-90の鉛フリー品である。
 THIS PRODUCT IS LEAD FREE OF 53309-**-90.

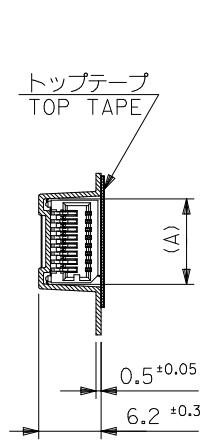

SECT. Z-Z

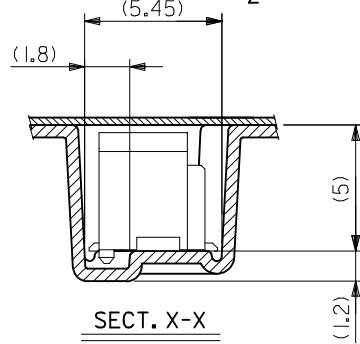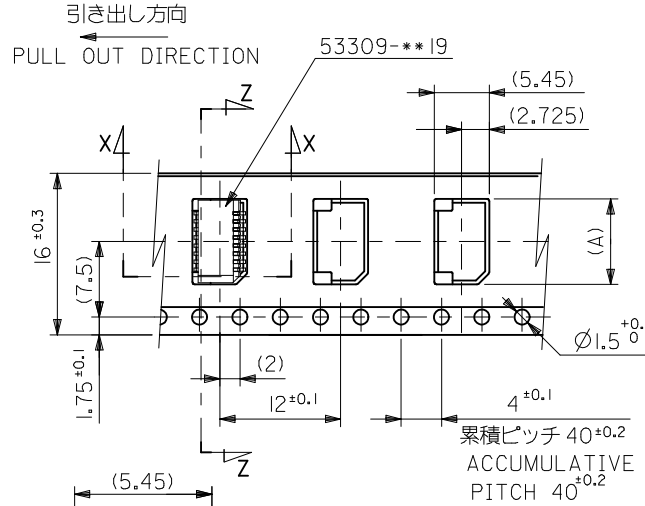

SECT. X-X

16mm幅キャリアテープ
 16mm WIDTH CARRIER TAPE

53309-**-71
 MODEL NO.

キャリアテープ幅
 CARRIER TAPE WIDTH

C

B

(A)

MATERIAL NO.

極数
 CIRCUIT

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
HKAWABATA	2004/03/10
CHECKED BY	DATE
KTOJO	2004/03/10
APPROVED BY	DATE
MSASAO	2004/03/10
MATERIAL NO.	
SEE NOTES	
SIZE	A3

SCALE ---		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION	
TITLE					
0.8 BTB CONN WAFER ASSY EMBSTP PKG -LEAD FREE-					
molex					
DOCUMENT NO.				SHEET NO.	
SD-53309-014				1 OF 2	
AINS INFORMATION THAT IS PROPRIETARY TO MOLEX. SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

