

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0534260810](#)

**Status:** **Active**

**Overview:** [Mini-Lock Wire-to-Board Connector System](#)

**Description:** 2.50mm Pitch, Mini-Lock PCB Header, Single Row, Right-Angle, Through Hole with Kinked Pins, Tin Plating, Positive Lock, 8 Circuits, Tray, 3.40mm PC Tail Length

**Documents:**

[Drawing \(PDF\)](#)

[3D Model](#)

[3D Model \(PDF\)](#)

[Product Specification 511630000-PS-000 \(PDF\)](#)

[Product Specification 511631000-PS-000 \(PDF\)](#)

[Product Specification PS-51103-005-001 \(PDF\)](#)

[Packaging Specification SPK-53426-002-001 \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980

UL E29179

**General**

Product Family PCB Headers

Series [53426](#)

Application Signal, Wire-to-Board

Overview [Mini-Lock Wire-to-Board Connector System](#)

Product Name Mini-Lock

UPC 800754357203

**Physical**

Breakaway No

Circuits (Loaded) 8

Circuits (maximum) 8

Color - Resin Natural

Durability (mating cycles max) 30

Flammability 94V-0

Glow-Wire Capable No

Keying to Mating Part Yes

Lock to Mating Part Yes

Material - Metal Phosphor Bronze

Material - Plating Mating Tin

Material - Plating Termination Tin

Material - Resin Polyester

Net Weight 1071.400/mg

Number of Rows 1

Orientation Right Angle

PC Tail Length 3.40mm

PCB Locator No

PCB Retention Yes

PCB Thickness - Recommended 1.60mm

Packaging Type Tray

Pitch - Mating Interface 2.50mm

Polarized to Mating Part Yes

Polarized to PCB No

Shrouded Fully


Stackable No

Temperature Range - Operating -40° to +105°C

Termination Interface: Style Through Hole - Kinked Pin

**Electrical**

Current - Maximum per Contact 3.0A

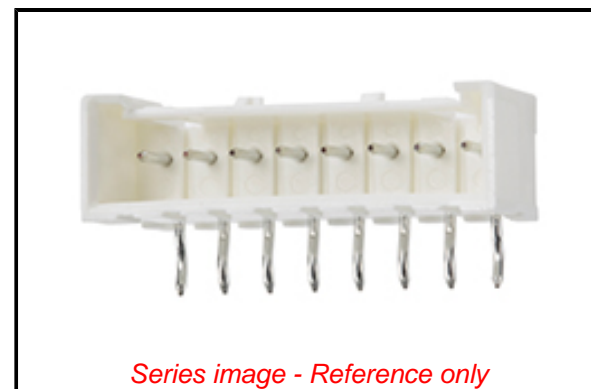

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[53426 Series](#)

**Mates With**

Mini-Lock Receptacle [51163](#) . Mini-Lock  
Cable Assembly [15137](#)

Voltage - Maximum

250V AC (RMS)/DC

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification

SPK-53426-002-001

Product Specification

511630000-PS-000, 511631000-PS-000,

PS-51103-005-001

Sales Drawing

534260000-SD-000, SD-53426-001-001

This document was generated on 08/26/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**