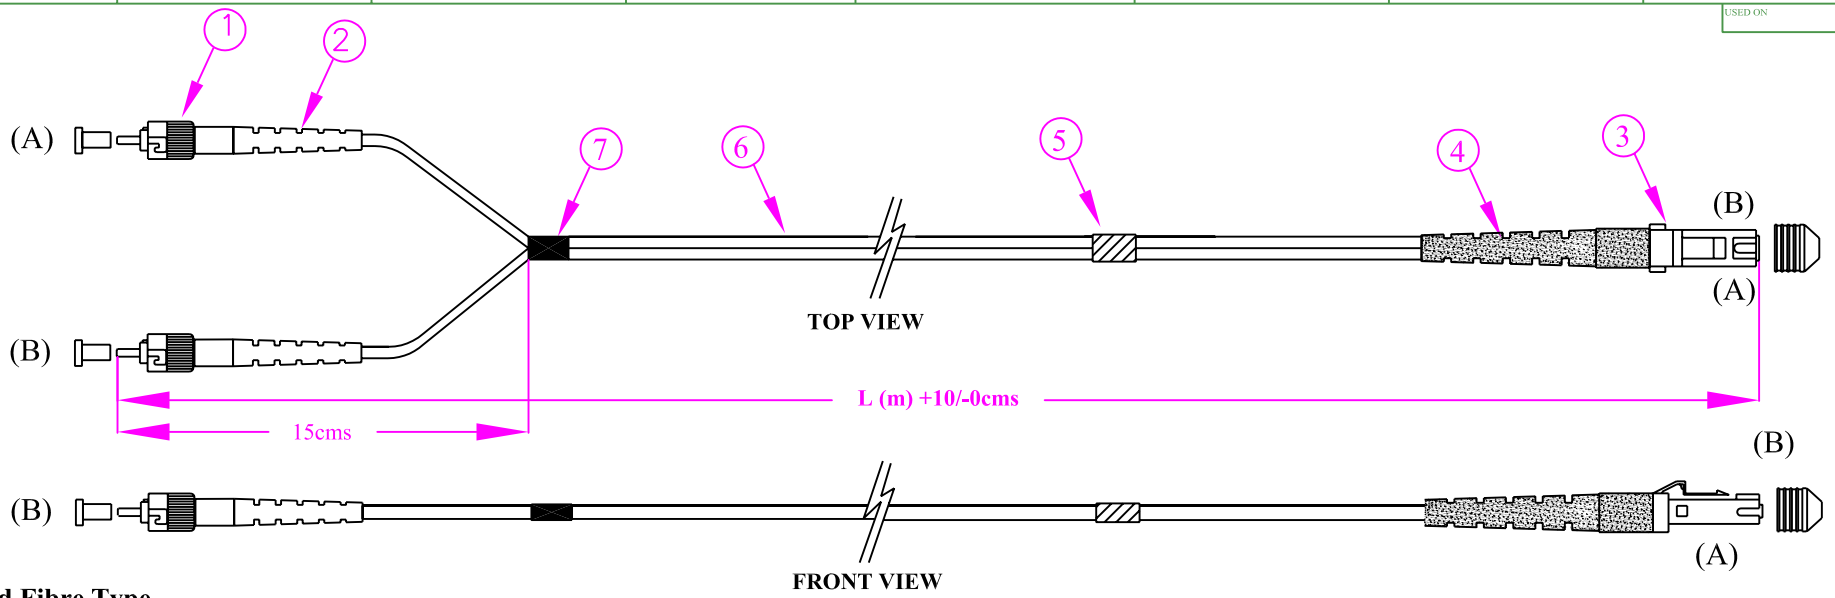

Cable and Fibre Type

Grade of the cable: LSZH

Fibre type (ISO/IEC 11801-2002)		Outer Sheath Colour
62.5/125	OM1	Orange
50/125	OM2	Orange
50/125	OM3	Purple
09/125	OS1	Yellow

Optical Performance (IEC 61300-3-4):
Multimode (@ 1300nm)
MTRJ: Max. IL - 0.50dB Typical: 0.30dB
ST : Max. IL - 0.30dB Typical: 0.20dB
Singlemode: (@1310nm and/or 1550nm)
MTRJ: Max. IL - 0.50dB Typical: 0.30dB Return Loss: >40dB
ST : Max. IL - 0.30dB Typical: 0.20dB Return Loss: >50dB

RoHS Compliant

Coiling Diameter: Coiling Diameter of the patchcord shall be greater than 200mm

Packing: Each product shall be individually bagged and identified with a unique number printed on an ID label affixed to the product. Also, each product will be supplied with a Test Certificate.

Id No.	Description	Ea
1.	ST Connector	2
2.	ST Boots	2
3.	MTRJ Connector	1
4.	MTRJ Boot	1
5.	Identification Label	1
6.	1.6mm Duplex Cable (L m)	1
7.	Black Tape	1

USED ON

REV | DESCRIPTION | DATE | DRN | APD | REV | DESCRIPTION (REVISION RECORD) | DATE | DRN | APD

MATERIAL | SIZE A4 | TITLE: ST-MTRJ Duplex PATCHCORD | DGN

FINISH | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± TOL0, 1 PLC ± TOL1, 2 PLC ± TOL2, 3 PLC ± TOL3, 4 PLC ± TOL4, ANGLES ± ANG | DRN

SCALE: Not to Scale | PART NO. | DWG/REF NO. | CHD

ALL DIMENSIONS IN MM | FibreFab Ltd. Milton Keynes, England | REV 01 | QA VER

SHEET 1 OF 1 | APD

SIGNATURE | DATE